

INDEX

From Claber expertise comes the most extensive range of DIY irrigation products in the market. Three specific lines offering tailor-made solutions; several product families made to last and that make everyday irrigation easier.



THE NEW WELLNESS IS CALLED HOME

THE PROFESSIONAL LINE 170

MERCHANDISING 178

PRODUCT CODE LIST 184

PACKAGING KEY TO SYMBOLS



Dispenser (size 20x39x13)



Small dispenser (size 10x39x13)



Hanging carded pack



Roll of hose



Вох



Pallet

ABOVE-GROUND IRRIGATION








TAP CONNECTORS	
QUICK-CLICK SYSTEM AUTOMATIC COUPLINGS	
SPRAY NOZZLES AND PISTOLS	
ERGOGRIP SYSTEM	
AQUAMASTER	
METAL-JET	
Sprinklers	
PULSATING SPRINKLERS	
HOSE REELS AND CARTS	
ROTOROLL EVOLUTION	
SHOWER, CARRY CART, CLEANING	
HAPPY FRESH EVOLUTION	
HOSES	
SPRINGY	
TOP-LIGHT	
SPIRAL KIT	

DRIP IRRIGATION

84 - 129 UNDERGROUND IRRIGATION 130 - 169





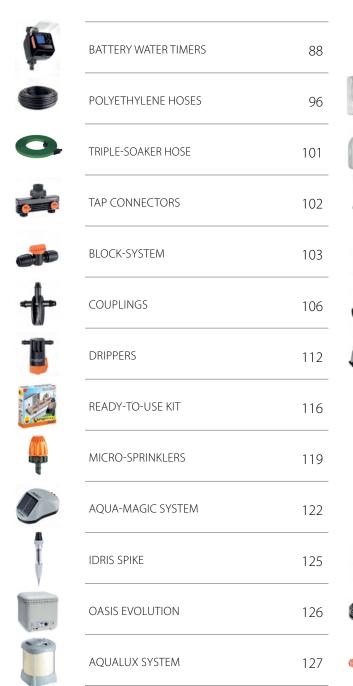



COMPRESSION CONNECTORS

THE NEW WELLNESS IS CALLED HOME

GREEN THINKING
New Trends

How the ways of living change nowadays when the home becomes the centre of our lives.


THE BEAUTY
OF FUNCTIONALITY



THE ROLE OF DESIGN

Technology is simplifying life, beauty is adding harmony to our souls. Design, which perfectly combines aesthetics and function, is the key that opens up a new way of living and it will increasingly take centre stage in our homes.

Style and practicality for watering small spaces? Discover the new **Rototoll 10m** (pag. 61)

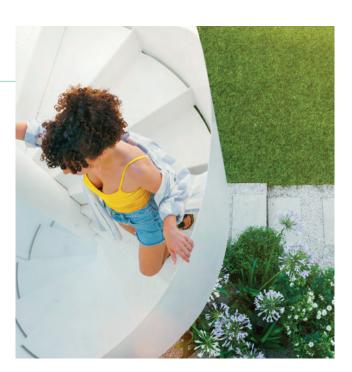

GREEN SPACES TO ENJOY



RETHINK GREEN SPACES


At last it is time to rediscover the pleasure of sharing our spaces with friends again.


The ideal place for evenings with friends?


A well-organised garden, with pieces of furniture that perfectly complement each other, lighting designs and, above all, a growing, luxuriant lawn.

Underground watering is an easy solution and tailored to modern gardens with **Hydro-4** (page 140)



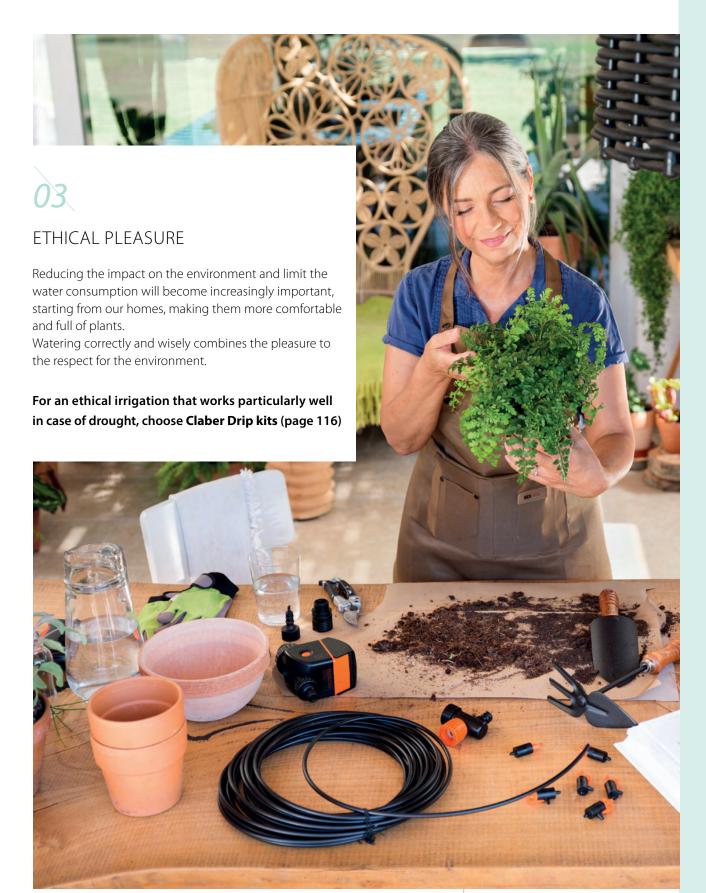

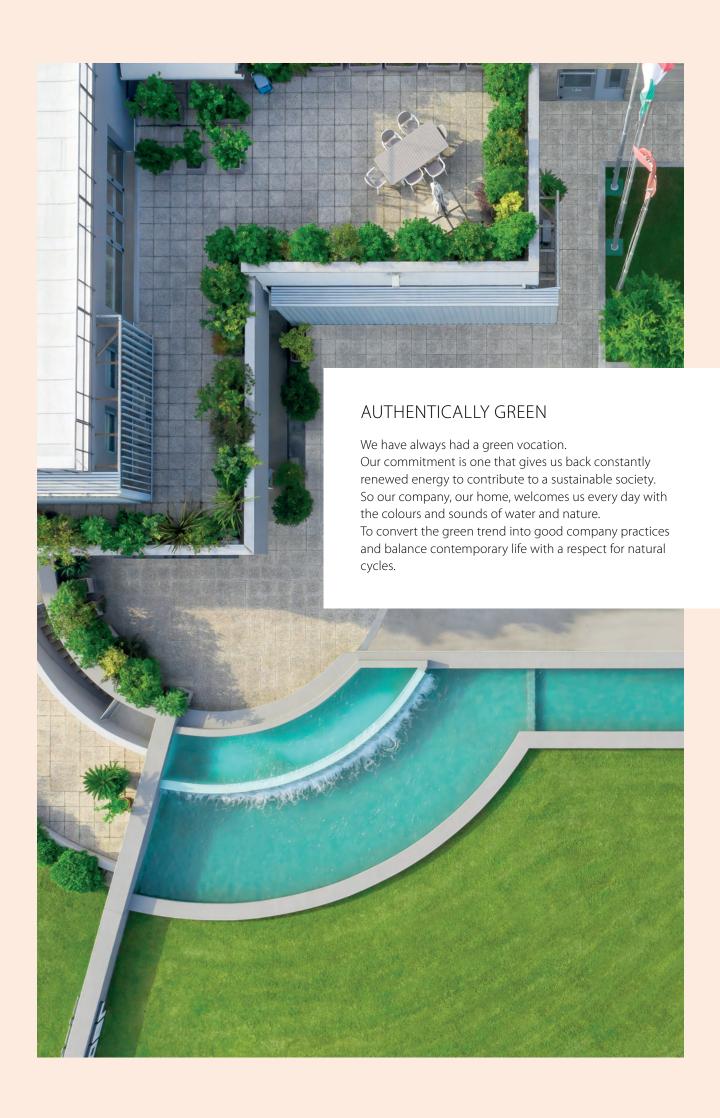

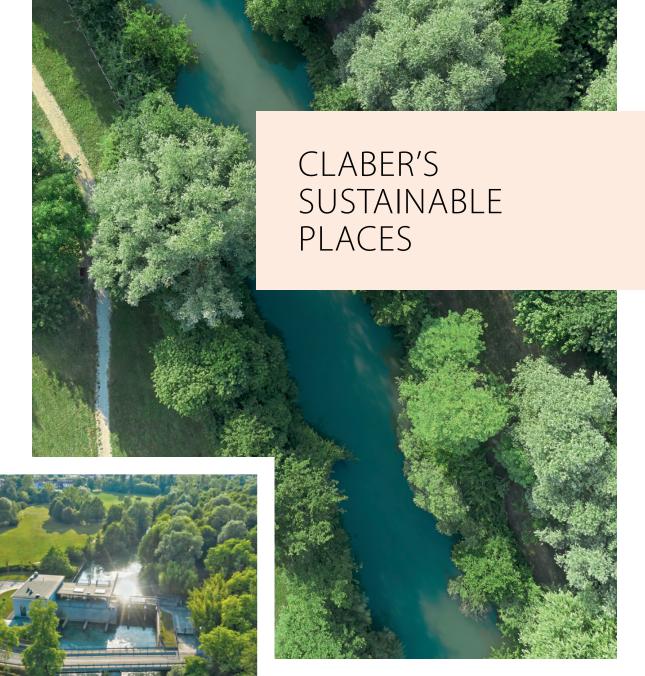

THE WATER ACADEMY

Making a company, culture and nature.

Amidst the green waters of a river that passes through the Friulian countryside we discovered a disused hydroelectric station. We brought it back to its full glory and today it generates clean energy and adds value to the area. The Water Academy means a thousand things to us, but the first is that we are able to use nature responsibly, giving and receiving without exploiting. It's somewhere for company activities to take place, reminding us of the importance of working with integrity and awareness. And also a place for cultural experiences, for teaching, welcoming and including. The power station produces energy, regulates the flow of water and follows nature's lead in a context of harmony and balance.

GOOD PRACTICES

Our whole history is our commitment to creating a business that is environmentally aware.

An idea that runs through every phase of our work and is translated into concrete actions and results. We have greatly reduced the company's basic requirements and energy consumption through advanced production systems, LED lighting, the installation of photovoltaic panels and water recovery systems.

We pay great attention to the quality of raw materials and are pioneers in the use of eco-sustainable, fully recyclable materials, such as FSC cardboard packaging and 100% recyclable PET shells.

And even before this, we work on education and popularising a culture of respect for nature and people.

Those who work with Claber fully embrace the conviction that everyone can contribute, every day, with small and large steps, to improve the environment, their own life and that of other people.

The future is ever greener with Claber.

BEAUTIFUL, SMART, VERY GREEN: THIS IS THE NEW CLABER PACKAGING

Claber has fully embraced the values of the circular economy, by setting some ambitious targets and by putting in practise some structured actions, such as the big innovations in its packaging.

Starting with the new display stands in FSC cardboard and 70% recycled materials that are environmentally

friendly, beautiful to look at and designed to make it even easier to find the ideal product while also offering the best compatibility with other Claber items.

The evolution continues with the new packaging where plastic is replaced by environmentally friendly materials and some smart, creative solutions.

To make customer's life easier, there are new dispensers for loose products and the labels will show new, bright, even clearer graphics.

Once again Claber is confirming that it can stand out, that it respects nature and cares about people.



FSC CARDBOARD AND 70% RECYCLED MATERIALS, BECAUSE WE LOVE NATURE.



CLEARER AND MORE EFFECTIVE INFORMATION.











A MATTER OF STYLE

Convenience, the choice of different jet patterns, quality materials and a unique design: the wide range of spray nozzles and pistols perfectly represents Claber unmistakable Made in Italy style.

CONNECTING UP

Much more than just simple connectors and couplings. In addition to being the most comprehensive and universal range of products, Claber range stands out for the work that has been done on such a small yet vitally important accessory, for perfect irrigation with no wasted water.



WHEN EVERYTHING TURNS OUT RIGHT

Practical, lightweight and sturdy, Claber hose reels and carts have one sole purpose: making your life in the garden easier every day.



AN AQUATIC DELIGHT

Static, rotating, oscillating and pulsating sprinklers guarantee perfectly calibrated and even irrigation across the lawn, creating pleasant water patterns with a light rain effect.





TAP CONNECTORS QUICK-CLICK® SYSTEM

Claber's answer to all of your tap connection needs: threaded with different diameters, smooth or with an aerator. The Quick-Click system is the easy way to connect up your watering hoses to all standard outdoor and indoor taps in one guick click! Claber's high quality materials guarantee resistant and long-lasting connectors. Universally compatible!

1/2" (15-21 mm) THREADED TAP CONNECTOR

708622











To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on. Female 1/2" (15-21 mm) thread. It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8622		50	2,9 x 4,0 x 2,9	10 x 39 x 13	0,005	0,67	6400	8 000625 086221
8623		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,37	2016	8 000625 086238

3/4" (20-27 mm) THREADED TAP CONNECTOR

708626











To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on. Female 3/4" (20-27 mm) thread. It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8626		100	3,5 x 4,1 x 3,5	20 x 39 x 13	0,010	1,48	7200	8 000625 086269
8627		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,40	2016	8 000625 086276

1" (26-34 mm) THREADED TAP CONNECTOR

708628



708629







To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on. Female 1" (26-34 mm) thread. It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8628		100	4,2 x 4,1 x 4,2	20 x 39 x 13	0,010	1,78	7200	8 000625 086283
8629		12	7,9 x 15,7 x 4,3	25 x 19 x 10	0,005	0,50	1728	8 000625 086290

MULTITHREADED TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)

708591



708804







To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on. Female 3/4" (20 - 27 mm) thread and 1/2" (15 - 21 mm) adaptor. It is complete of washer.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8591	100	3,5 x 4,8 x 3,5	20 x 39 x 13	0,010	2,10	7200	8 000625 085910
8804	14	7.9 x 15.7 x 3.5	25 x 19 x 10	0.005	0.48	2016	8 000625 088041

MULTI THREADED TAP CONNECTOR 1" (26-34 mm) - 3/4" (20-27 mm)

708595



708803





To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on. Female 1" (26-34 mm) thread and 3/4" (20 - 27 mm) adaptor. It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8595		40	4,2 x 4,8 x 4,2	10 x 39 x 13	0,005	1,14	5120	8 000625 085958
8803		12	7,9 x 15,7 x 4,3	25 x 19 x 10	0,005	0,50	1728	8 000625 088034

DOUBLE TAP CONNECTOR

708598



708599





To connect 2 hoses at the same time to the tap. Includes on/off valves and washer. Easy attachment by simply screwing on. With female 3/4" (20 - 27 mm) thread and a reducer to 1/2" (15 - 21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8598		25	11,1x8,3x5,2	20 x 39 x 13	0,010	2,32	1800	8 000625 085989
8599		8	15,4 x 24 x 6	28 x 25 x 19	0,013	1,20	384	8 000625 085996

3/4" (20 - 27 mm) MALE THREADED TWO-WAY ADAPTER

708590



708589





For taps with 3/4" (20 - 27 mm) thread. Includes on/off valves and washer. Enables assembly of two water timers, pressure reducers, etc.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8590	8	14,6 x 9,7 x 5,7	20 x 39 x 13	0,010	1,60	576	8 000625 085903
8589	<u></u> 5	15,4 x 24 x 5,6	28 x 25 x 19	0,013	1,31	240	8 000625 085897

4 OUTLETS DISTRIBUTOR

708580









Converts one water tap into four outlets, each separately controlled, enabling different areas to

For taps with 3/4" (20 - 27 mm) thread.

code	packaging q	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8580	8	3	18,3 x 11 x 5,8	20 x 39 x 13	0,010	2,06	576	8 000625 085804
8581		5	16 x 30 x 5,5	18,5 x 25 x 36	0,016	1,60	240	8 000625 085811

1"F (26-34 mm) 3/4" M (20-27 mm) ADAPTER

708509



Converts the 3/4" (20 - 27 mm) female tap connector into a 1" (26 - 34 mm) female tap





packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
	12	70 157 30	25 10 10	0.005	0.40	1720

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8509	<u> </u>	7,9 x 15,7 x 3,0	25 x 19 x 10	0,005	0,40	1728	8 000625 085095



CONNECTORS

Practical connectors that last.

The Quick-Click connectors offer the best in terms of practicality and durability. They are resistant to knocks, weathering and UVA rays, as well as to high pressure. The spring inside – patented by Claber – withstands up to 1.5 million clicks without breaking.

They also offer excellent compatibility as they have a standard pitch used around the world.

QUICK-CLICK® SYSTEM JUST ONE SIMPLE CLICK

TAP CONNECTORS

Connect up in a flash

EASY TO USE

ULTRA-RESISTANT MATERIALS

FOR ALL TAP TYPES



3/4" (20-27 mm) QUICK-FIT TAP CONNECTOR







3/4" (20-27 mm) indoor tap connector to attach a hose with a tap in the kitchen or bathroom. For taps with 22 mm male or 24 mm female thread.

Connection with quick release lever clamp mechanism.

Complete with metal filter-aerator and adapter.

Quick-Click coupling. Fully watertight connection.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8587	<u> </u>	7,9 x 15,7 x 4,3	25 x 19 x 10	0,005	0,75	1440	8 000625 085873

3/4" (20-27 mm) TAP CONNECTOR METAL

708597





3/4" (20-27 mm) indoor tap connector.
For taps with 22 mm male or 24 mm female thread.
Complete with adapter.
Quick-Click coupling.
Fully watertight connection.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8597	<u> </u>	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	1,06	2016	8 000625 085972

SMOOTH TAP CONNECTOR

708525







For taps with round spouts (ext. \varnothing min. 15 max. 20 mm). With metal clip to fasten it safely to the tap. Quick-Click coupling.

code	packaging q	Įty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8525	□ 1	0	7,9 x 15,7 x 5	25 x 19 x 10	0,005	0,85	1440	8 000625 085255

KOALA QUICK-CLICK

708583







Square and mixer taps connector ideal to bring water from indoor taps to balconies not provided with any water outlets.
Easy to install and perfectly watertight.
Quick-Click coupling.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8583	8	15,4 x 24 x 5,5	28 x 25 x 19	0,013	1,34	384	8 000625 085835

1" - 3/4" ANGLED TAP CONNECTOR

708592





Tap connector with joint for 1" (26-34 mm) and 3/4" (20-27 mm) threaded taps. The 180° swivel and 360° rotation prevent the hose from twisting and kinking. 3/4" M threaded outlet and Quick-Click male connector.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8592	8	15,4 x 24 x 4,7	28 x 25 x 19	0,013	1,10	384	8 000625 085927

MENDER 1/2" HOSE

708618



708619







Saves a damaged hose, joining the two pieces obtained once it is cut at the leaking point. For 1/2'' (12,5 mm) hoses.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8618	50	3,5 x 4,8 x 3,5	20 x 39 x 13	0,010	1,37	3600	8 000625 086184
8619	14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,55	2016	8 000625 086191

MENDER 5/8" HOSE

708562



708563







Saves a damaged hose, joining the two pieces obtained once it is cut at the leaking point. For 5/8'' (15 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8562		30	7 x 5,4 x 7	10 x 39 x 13	0,005	1,00	3840	8 000625 085620
8563		10	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,48	1440	8 000625 085637

MENDER 3/4" HOSE

708620




708621





Saves a damaged hose, joining the two pieces obtained once it is cut at the leaking point. For 3/4'' (19 mm) hoses.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8620	50	7 x 6 x 7	20 x 39 x 13	0,010	2,10	3600	8 000625 086207
8621	<u> </u>	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,56	1440	8 000625 086214

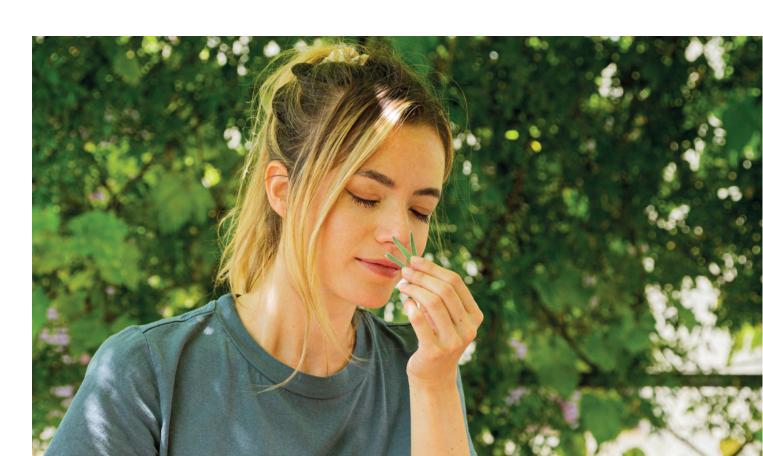

TWO-WAY CONNECTOR

708612



708613





For connecting two hoses in series with Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8612		100	3 x 4 ,9 x 3	20 x 39 x 13	0,010	1,20	7200	8 000625 086122
8613		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,36	2016	8 000625 086139

CONNECTOR WITH SHUT-OFF VALVE







Connector with shut-off valve for opening/closing and regulating the water flow. Easy grip control knob. Quick-Click coupling.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8611	8	15,4 x 24 x 5,5	28 x 25 x 19	0,013	0,96	384	8 000625 086115

THREE-WAY CONNECTOR

708614









For deviating and splitting up water lines.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8614		40	7,3 x 6,3 x 2	10 x 39 x 13	0,005	0,85	5120	8 000625 086146
8615		12	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,42	1728	8 000625 086153

SPRINKLER CONNECTOR 3/4" M

708636







Connects to Quick-Click system any sprinkler or accessory with inside 3/4" thread.


code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8636		50	3,2 x 4 x 3,2	10 x 39 x 13	0,005	0,62	6400	8 000625 086368
8637	\Leftrightarrow	14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,35	2016	8 000625 086375

O-RING AND WASHER SET

708811







- 5 pcs black OR 10,78 x 2,62

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8811	15	7,9 x 15,7 x 1,5	25 x 19 x 10	0,005	0,35	2160	8 000625 088119

9-13 mm COUPLING







Automatic coupling for Ø 9-13 mm hose. Compatible with:

- Spiral Kit (9034) and Spiral Kit Plus (9338) - Mini-set Balcony (9031), Garden (9032) and Utility (9028) - Starter Garden-Set (9053).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9025	10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,50	1440	8 000625 090259

COUPLING WITH SHUT-OFF VALVE

708601





Automatic coupling with shut-off valve, for opening/closing and regulating the water flow. Easy grip control knob. Quick-Click coupling.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8601	8	15,4 x 24 x 5,5	28 x 25 x 19	0,013	1,04	384	8 000625 086016

1/2" AUTOMATIC COUPLING

708606



708607





Automatic coupling for 1/2" hoses (Ø 12,5 mm).

code	packaging qt	y pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8606	50	3,5 x 5,8 x 3,5	20 x 39 x 13	0,010	1,60	3600	8 000625 086061
8607	□ 14	4 7,9 x 15,7 x 3,7	25 x 19 x 10	0,005	0,62	2016	8 000625 086078

5/8" AUTOMATIC COUPLING

708568



708569





Automatic coupling for 5/8" hoses (Ø 15 mm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8568		50	3,8 x 6,0 x 3,8	20 x 39 x 13	0,010	1,77	3600	8 000625 085682
8569		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,57	1728	8 000625 085699

3/4" AUTOMATIC COUPLING

708608



708609





Automatic coupling for 3/4" hoses (Ø 19 mm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8608		50	4,2 x 6,6 x 4,2	20 x 39 x 13	0,010	2,03	3600	8 000625 086085
8609	$\stackrel{\smile}{\Longrightarrow}$	12	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,65	1728	8 000625 086092

1/2" AUTOMATIC COUPLING W / AQUASTOP

709026



NEW FOR 2023





Automatic coupling with Aquastop for Ø 9-13 mm hose. Compatible with:

- Spiral Kit (9034) and Spiral Kit Plus (9338)

- Mini-Set Balcony (9031), Garden (9032) and Utility (9028) - Starter Garden-Set (9053).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9026	<u> </u>	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,60	1440	8 000625 090266

1/2" AUTOMATIC COUPLING W / AQUASTOP

708602



708603





Automatic coupling for 1/2" (Ø 12,5 mm) hoses with aguastop valve. Inserted at the end of the hose, water flow is interrupted by disconnection of male piece.

	pcs/pallet	weight (kg)	volume (m³)	box size (cm)	pack size (cm)	qty	packaging	code
8 000625 086023	3600	1,71	0,010	20 x 39 x 13	3,5 x 5,8 x 3,5	50		8602
8 000625 086030	2016	0,62	0,005	25 x 19 x 10	7,9 x 15,7 x 3,5	14		8603

5/8" AUTOMATIC COUPLING W / AQUASTOP

708566



708567





Automatic coupling for 5/8" (Ø 15 mm) hoses with aquastop valve. Inserted at the end of the hose, water flow is interrupted by disconnection of male piece.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8566	50	3,8 x 6,0 x 3,8	20 x 39 x 13	0,010	1,83	3600	8 000625 085668
8567	12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,60	1728	8 000625 085675

3/4" AUTOMATIC COUPLING W / AQUASTOP

708604



708605





Automatic coupling for 3/4'' (Ø 19 mm) hoses with aquastop valve. Inserted at the end of the hose, water flow is interrupted by disconnection of male piece.

	pcs/pallet	weight (kg)	volume (m³)	box size (cm)	pack size (cm)	qty	packaging	code
8 000625 086047	3600	2,14	0,010	20 x 39 x 13	4,2 x 6,6 x 4,2	50		8604
8 000625 086054	1728	0,70	0,005	25 x 19 x 10	7,9 x 15,7 x 4,2	12		8605

TAP CONNECTOR AND 1/2" COUPLING SET

708813





Set with tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm), 1/2" automatic coupling.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8813	10	7.9 x 15.7 x 3.8	25 x 19 x 10	0.005	0.65	1440	8 000625 088133

1/2" HOSE CONNECTION SET

708818





For connecting two hoses in series. It contains: two ways connector, 1/2" automatic couplings with and without aquastop.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8818	8	15.4 x 24 x 3.8	28 x 25 x 19	0.013	1.00	384	8 000625 088188

ERGOGRIP® SYSTEM

The Ergogrip System tap connectors and automatic couplings are the result of Claber research: offering the very best when it comes to harmonious lines, ergonomics and ease of use, thanks to the rubber surface which always ensures a perfect grip. Ergogrip System meet any connection requirement for hoses with different diameters, and the standard pitch makes it compatible with tap connectors and automatic couplings used around the world. The spring inside the couplings withstands up to 1.5 million clicks without breaking, and is not damaged by water. The perfect solution for those with the most demanding needs. Ideal for use with Confort pistols.

TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)

708556







Universal tap connector with 1/2" (15-21 mm) and 3/4" (20-27 mm) thread with gaskets for a perfectly watertight seal. Male connector for connecting all automatic couplings.

code	packaging gtv	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8556	50	3,9 x 4,8 x 3,9	10 x 39 x 13	0,005	1,00	6400	8 000625 085569
8557	C 12	7.9 x 15.7 x 4.2	25 x 19 x 10	0.005	0.39	1728	8 000625 085576

TAP CONNECTOR 3/4" (20-27 mm) - 1" (26-34 mm)

708558



708559







Universal tap connector with 3/4" (20-27 mm) and 1" (26-34 mm) thread with gaskets for a perfectly watertight seal.

Male connector for connecting all automatic couplings.

7,9 x 15,7 x 4,2 25 x 19 x 10

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8558		40	8 x 4,75 x 8	10 x 39 x 13	0,005	0,97	5120	8 000625 085583
8559		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,39	1440	8 000625 085590

MENDER 1/2"

708560



708561





For repairing a damaged garden hose or for connecting two coils of hose of the same

For hoses with 1/2" (12,5 mm) diameter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8560		30	3,6 x 5,6 x 3,6	10 x 39 x 13	0,005	0,93	3840	8 000625 085606
8561		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,51	1728	8 000625 085613

UNIVERSAL MENDER 1/2" - 5/8" - 3/4"

708564









For repairing a damaged garden hose or for connecting two coils of hose, even with different

For hoses with 1/2" - 5/8" - 3/4" diameter.

code 8564	packaging	' '	pack size (cm) 7,2 x 4,3 x 8	box size (cm) 20 x 39 x 13	volume (m³) 0,010	weight (kg) 2,00	pcs/pallet 2880	8 000625 085644
8565		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,62	1440	8 000625 085651

COUPLING 1/2" - 5/8"

708542



708543





"Ergogrip" automatic coupling for hoses with 1/2" (12,5mm) - 5/8" (15 mm) diameter. Special rubber-covered surface for a perfect grip.

Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures, up to 40 bar.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8542		50	8 x 6 x 8	20 x 39 x 13	0,010	1,82	3600	8 000625 085422
8543		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,57	1728	8 000625 085439

UNIVERSAL COUPLING 1/2" - 5/8" - 3/4"

708546



708547



"Ergogrip Universal" automatic coupling for hoses with 1/2" (12,5 mm) - 5/8" (15 mm)) -
3/4" (19 mm) diameter.	

Special rubber-covered surface for a perfect grip.

Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures, up to 40 bar.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8546	40	8 x 6,8 x 8	20 x 39 x 13	0,010	1,82	2880	8 000625 085460
8547	<u> </u>	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,57	1440	8 000625 085477

COUPLING 1/2" - 5/8" W/AQUASTOP 708544









"Ergogrip" automatic coupling for hoses with 1/2" (12,5 mm) - 5/8" (15 mm) diameter. Special rubber-covered surface for a perfect grip. Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures, up to 40 bar. Features automatic water shut-off valve - inserted at the end of the hose, water flow is stopped when the coupling is disconnected.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8544		25	8 x 6 x 8	10 x 39 x 13	0,005	0,95	3200	8 000625 085446
8545		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,58	1728	8 000625 085453

UNIVERSAL COUPLING 1/2" - 5/8" - 3/4" W/AQUASTOP

708548







"Ergogrip Universal" automatic coupling for hoses with 1/2" (12,5 mm) - 5/8" (15 mm) - 3/4" (19 -mm) diameter.

Special rubber-covered surface for a perfect grip. Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures, up to 40 bar. Features automatic water shut-off valve - inserted at the end of the hose, water flow is stopped when the coupling is disconnected.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8548		20	8 x 6,8 x 8	10 x 39 x 13	0,005	0,98	2560	8 000625 085484
8549	\bigcirc	10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,58	1440	8 000625 085491



SPRAY NOZZLES AND PISTOLS

These Claber spray nozzles and pistols are ergonomic and practical to use, and the product line is constantly being developed. The unique design of the Pro and Plus spray nozzles means you can adjust the jet with one hand, and the ergonomic grip on the Ergo pistols is comfortable and easy to hold. The Elegant line allows you to water small green spaces consuming less water, with jets designed to prevent water or soil splashes. For those who settle for nothing but the best, there's the Confort line: a rubber grip for perfect hold, even with wet hands; a practical button for turning the water flow on or off using your finger; and a valve at the back for adjusting the flow rate. A rubber-coated cap and ring nut are also included, and there are models available in metal for the utmost sturdiness.





PRECISION CONFORT

709561





Spray pistol with new anatomical rubber grip and convenient front on-off flow button. Knob at rear adjusts strength of water jet.

Cap with rubber lining for protection against impact.

Water flow can be adjusted as required, from completely closed (concentrated) to completely open (fan spray).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9561		18 x 24,5 x 40	25 x 19 x 10	0,005	0,75	432	8 000625 095612

METAL - JET CONFORT

709567





Spray pistol with resistant, inalterable chrome metal components, new anatomical rubber grip and convenient front on-off flow mechanism.

Metal knob at rear adjusts strength of water jet.

Pistol body is rubber lined for protection against impact.

Water flow can be adjusted as required, from completely closed (concentrated) to completely open (fan spray).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
9567		17,7 x 24 x 4,5	25 x 19 x 10	0,005	0,82	432	8 000625 095674

BALCONY CONFORT

709565





Shower pistol with aerator, new anatomical rubber grip and convenient front on-off flow button. Knob at rear adjusts strength of water jet.

Rubber lined lock nut for protection against impact, for easy opening, inspection and cleaning of pistol. The aerator (also removable for easy cleaning) assures a gentle jet of water mixed with bubbles, ideal for watering potted plants.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9565		3	17 x 24,5 x 6,4	25 x 28 x 13	0,009	0,91	216	8 000625 095650

MULTI - JET CONFORT





Multifunction pistol with new anatomical rubber grip and convenient front on-off flow button. Knob at rear adjusts strength of water jet.

Rubber lined lock nut for protection against impact, for easy opening, inspection and cleaning of pistol.

Rotate the nut for four different flow types: shower, concentrated, fan spray and mist.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9563		17 x 24,5 x 6,4	25 x 28 x 13	0,009	0,90	216	8 000625 095636



SPRAY PISTOL

708966



708756









Spray pistol with lever adjustment of water flow and blocking device for desired jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8966		16	10 x 16 x 2	20 x 39 x 13	0,010	1,75	1152	8 000625 089666
8756		5	14 x 21,5 x 3,5	25 x 19 x 10	0,005	0,61	720	8 000625 087563

ERGO SPRAY PISTOL

708538











Spray pistol with practical ergonomic grip. Water flow adjustment lever. Dual jet: from closed to open (jet or fan spray) selection device and lock of required jet.

code	packaging qt	y pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8538	15	15,5 x 14,2 x 4	20 x 39 x 13	0,010	2,16	1080	8 000625 085385
8539	<u> </u>	15,5 x 20,5 x 4	25 x 28 x 13	0,009	1,50	720	8 000625 085392

STARTER SET 1/2"

708551





- tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm), automatic couplings 1/2" with and without aquastop, Ergo spray pistol.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8551		16 x 24 x 5	28 x 25 x 19	0,013	1,70	288	8 000625 085514

ERGO SHOWER PISTOL





Spray pistol with practical ergonomic grip. Shower jet open and fine spray. Water flow adjustment lever. Jet lock device, stainless steel perforated disk.

code	packaging qty	y pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8541		17,5 x 21 x 6	25 x 19 x 10	0,005	0,74	576	8 000625 085415

GARDEN SPRAY PISTOL





The multifunction Garden spray pistol allows to water the garden with a wider range of flows: from all concentrated to soft fan, wise, gentle mist, shower spray, soaker. Fingertip pressure control water button.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9373	<u></u> 5	12 x 18 x 7	25 x 28 x 13	0,009	0,90	360	8 000625 093731

ERGO-GARDEN SPRAY PISTOL





Multi-Jet spray pistol with practical ergonomic grip.
Rotate the pistol head for different jets: from jet to soft fan wise, gentle soaker, shower and aerator spray (jet mixed with air bubbles).
Very useful for watering potted plants.
Selector device and lock for required jet.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9391	8	15,5 x 21 x 7,85	25 x 28 x 13	0,009	1,60	576	8 000625 093915

FAN SPRAY





Fine, soft, gentle spray. Non slip handle grip with regulating valve on handle. Rustproof metal shower head plate.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8917		15,4 x 24 x 6,15	25 x 28 x 13	0,009	0,70	288	8 000625 089178

LONG FAN SPRAY





Fine, soft, gentle spray, non slip handle grip with regulating valve on handle. Rustproof metal shower head plate. With long aluminium extension.

1							
code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8922	2	16 x 69 x 6	20 x 77 x 10	0,012	0,74	96	8 000625 089222

ELEGANT DUAL JET PISTOL

709081







Lightweight and compact pistol with dual jet: concentrated or fan spray. Ideal both for watering plants and for washing.

Ergonomic grip.

Handy front-mounted push-button mechanism for controlling and shutting off the water flow. 2 flow settings.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9081	4	15 x 19,5 x 3	25 x 19 x 10	0,005	0,50	576	8 000625 090815

ELEGANT MULTIFUNCTION NOZZLE 5 JETS 709089







Lightweight and compact multifunction spray nozzle. Turn the head for 5 jets: shower, concentrated, mist, cone and flat (+ 1 OFF). Quick-Click connection.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9089		7,9 x 15,7 x 7,5	25 x 19 x 10	0,005	0,50	864	8 000625 090891

ELEGANT SHOWER PISTOL







Lightweight and compact shower pistol with wide and gentle spray.

Ergonomic grip.

Handy front-mounted push-button mechanism for controlling and shutting off the water flow. 2 flow settings.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9082	4	15,5 x 20 x 6	25 x 19 x 10	0,005	0,55	576	8 000625 090822

ELEGANT MULTIFUNCTION PISTOL

709083





Lightweight and compact multifunction pistol with aerator. Ergonomic grip.

Handy front-mounted push-button mechanism for controlling and shutting off the water flow. 2 flow settings.

Rotate the head to get 4 different jets: shower, concentrated, aerated, mist.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9083		16 x 20 x 6	25 x 19 x 10	0,005	0,60	576	8 000625 090839

ELEGANT MULTIFUNCTION PISTOL 5 JETS

709088



NEW FOR 2023





Lightweight, compact multifunction pistol. Ergonomic grip. Handy front-mounted push-button for controlling and shutting off the water flow.

2 flow settings.

Turn the pistol head for 5 different jets: shower, concentrated, mist, cone and flat.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9088		15,5 x 20 x 6	25 x 19 x 10	0,005	0,55	576	8 000625 090884

ELEGANT TELESCOPIC MULTIFUNCTION LANCE

709086 (1) 4



Multifunction spray lance with telescopic rod. Ergonomic horizontal grip with shallow-angled outlet. Rustproof aluminium rod.

Handy front-mounted push-button mechanism for controlling and shutting off the water flow. 2 flow settings. Length: 70 - 105 cm.

Swivel spray head equipped with 4 different jets: shower, concentrated, aerated, mist.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9086	2	12 x 68,5 x 6	20 x 77 x 10	0,015	1,07	96	8 000625 090860

JET SPRAY NOZZLE

708616









Adjustable from completely closed to fully open.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8616		50	3,45 x 11,7 x 3,45	20 x 39 x 13	0,010	1,80	3600	8 000625 086160
8617		8	15,4 x 24 x 3,8	28 x 25 x 19	0,013	0,78	384	8 000625 086177

NOZZLE AND COUPLING SET





Set with jet spray nozzle and 1/2" automatic coupling with aquastop.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8800		10	15,4 x 24 x 4,5	28 x 25 x 19	0,013	1,18	480	8 000625 088003

STARTER SET







8802 contains: tap connector 3/4'' (20-27 mm) and reducer 1/2'' (15-21 mm), automatic couplings 1/2'' with and without aquastop, jet spray nozzle.

8827 contains: tap connector 3/4'' (20-27 mm) and reducer 1/2'' (15-21 mm), automatic couplings 3/4'' with and without aquastop, jet spray nozzle.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8802	8	15,4 x 24 x 4,5	28 x 25 x 19	0,013	1,34	384	8 000625 088027
8827	8	15,4 x 24 x 4,5	28 x 25 x 19	0,013	1,44	384	8 000625 088270

PRO SPRAY NOZZLE





Nozzle with adjustable jet: from closed to open (jet or fan spray), by rotating the ergonomic cap of the nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8534		15	4 x 17,5 x 4	10 x 39 x 13	0,005	1,21	1920	8 000625 085347
8535		5	15,4 x 24 x 3,5	28 x 25 x 13	0,009	0,70	360	8 000625 085354

PLUS SPRAY NOZZLE





Nozzle with adjustable jet: from closed to open (jet or fan spray). Water flow regulation by turning the knob valve.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8536		15	4 x 17,9 x 4	10 x 39 x 13	0,005	1,32	1920	8 000625 085361
8537		5	15,4 x 24 x 4,3	28 x 25 x 13	0,009	0,71	360	8 000625 085378

AQUAMASTER

The main feature of the new range of Aquamaster connectors and accessories is their distinctive large diameter. Designed for 3/4" and 1" hoses, they ensure that more water can pass through, supporting high pressures.

Ideal for professional applications such as agriculture and construction, the Aquamaster range is often the best solution in the garden, too: from its use with suction pumps to hoses of a longer length.

It offers a high flow rate and a tight seal, thanks to the Safety-Lock rapid coupling technology.



1" - 3/4" MAX-FLOW TAP CONNECTOR 709641







Multi-threaded tap connector to attach a line with Max-Flow couplings to the tap. It is complete of washer. Female 1" (26 - 34 mm) thread and 3/4" (20 - 27 mm) adaptor.

code	packaging o	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9641		8	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,43	1152	8 000625 096411

1"1/4 - 1" MAX-FLOW TAP CONNECTOR

709655







Multi-threaded tap connector to attach a line with Max-Flow couplings to the tap. Complete with washer. Female 1" 1/4 (33-42 mm) thread and 1" (26-34 mm) adaptor.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9655		7,9 x 15,7 x 5,8	25 x 19 x 10	0,005	0,48	864	8 000625 096558

3/4" M THREADED MAX-FLOW ADAPTOR 709642







Threaded connector for fitting any accessory with a F 3/4" (20-27 mm) thread to the Max-Flow

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9642	10	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,36	1140	8 000625 096428

1" M MAX-FLOW ADAPTOR

709654



NEW FOR 2023





Threaded connector for fitting any accessory with a F 1" (26-34 mm) thread to the Max-Flow

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9654	C 10	7,9 x 15,7 x3,6	25 x 19 x 10	0,005	0,44	1440	8 000625 096541

1" 1/4 - 1"THREADED ADAPTOR

709653





Adapter to transform a female 1" (26-34 mm) tap connector into one measuring 1" 1/4 (33-42 mm).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9653		7,9 x 15,7 x 5,8	25 x 19 x 10	0,005	0,53	864	8 000625 096534

ABOVE-GROUND

NEW FOR 2023

2-WAY MAX-FLOW CONNECTOR 709643







Connector for joining together in series two hoses with Max-Flow couplings installed on the

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9643	<u> </u>	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,41	1140	8 000625 096435

2-WAY CONNECTOR MAX-FLOW TO STANDARD 709644





Connector for joining together in series two hoses with a Max-Flow coupling and a Quick-Click automatic coupling installed respectively on the ends.

code	packaging qt	y pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9644	C 10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,37	1140	8 000625 096442

3-WAY MAX-FLOW CONNECTOR 709645





Three-way connector splitting the irrigation line and directing the water to two different points. Connect three lengths of hose with Max-Flow couplings on the ends.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9645	 10	7,9 x 15,7 x 2,6	25 x 19 x 10	0,005	0,61	1140	8 000625 096459

3-WAY CONNECTOR MAX-FLOW TO STANDARD 709646





Three-way connector splitting the irrigation line and directing the water to two different points. Connect one length of hose with a Max-Flow coupling to two lengths of hose with Quick-Click automatic couplings.

code	packaging qt	y pack size	e (cm) box siz	e (cm) volume	(m³) weight (kg)	pcs/pallet	
9646	C 10	7,9 x 15	,7 x 2,6 25 x 1	9 x 10 0,005	0,46	1140	8 000625 096466

MAX-FLOW O-RING AND WASHERS SET 709657





O-rings and spare 1" and 3/4" washers for products in the Max-Flow range. It includes:

- 3 Max-Flow O-rings,

- 2 standard O-rings, 1 x 1" (26-34 mm) washer, 1 x 3/4" (20-27 mm) washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9657		10	7,9 x 15,7 x 1,0	25 x 19 x 10	0,005	0,16	2160	8 000625 096572

3/4" MAX-FLOW COUPLING

709647





Max-Flow coupling for 3/4" (19 mm) hoses. A perfectly watertight connection and seal with Safety Lock.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9647	8	7,9 x 15,7 x 2,6	25 x 19 x 10	0,005	0,58	1152	8 000625 096473

1" MAX-FLOW COUPLING

709650





Max-Flow coupling for 1" (25 mm) hoses. A perfectly watertight connection and seal with Safety Lock.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9650		7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,55	864	8 000625 096503

3/4" MAX-FLOW MENDER

709648







A mender to save a damaged hose: cut the hose at the point where the leak is and use it to join the two lengths together. For 3/4'' (19 mm) hoses.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9648	8	7,9 x 15,7 x 4,3	25 x 19 x 10	0,005	0,57	1152	8 000625 096480

3/4" - 1" MAX-FLOW MENDER

709649





A mender for joining together two hoses, one with a diameter of 3/4" (19 mm) and one 1" (25 mm), without needing any other accessories.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9649		7,9 x 15,7 x 5,3	25 x 19 x 10	0,005	0,57	864	8 000625 096497

1" MAX-FLOW MENDER

709651





A mender to save a damaged hose: cut the hose at the point where the leak is and use it to join the two lengths together. For 1''(25 mm) hoses.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9651		7,9 x 15,7 x 5,3	25 x 19 x 10	0,005	0,65	864	8 000625 096510

MAX-FLOW ADJUSTABLE NOZZLE

709652

1

2







Adjustable from completely closed to fully open. For use with Max-Flow couplings.

code pa

packaging qty

pack size (cm) 7,9 x 24 x 4,2 box size (cm) 28 x 13 x 25 volume (m³) 0,009 weight (kg) pcs/pallet 0,70 432

8 000625 096527



COMPACT AND FUNCTIONAL, IT ALLOWS YOU TO EASILY ADJUST THE JET ACCORDING TO USAGE REQUIREMENTS.

CODE		8609	9647	
DESCRIPTION		3/4" AUTOMATIC COUPLING	3/4" MAX FLOW COUPLING	
	1 bar	36	75	
Elou rato (I/min)	2 bar	57	107	
Flow rate (I/min)	3 bar	73	112	
	4 bar	85	125	

CODE	8617			96	9652	
DESCRIPTION		PRAY ZLE	MAX FLOW ADJUSTABLE NOZZLE			
Jet		_				
	1 bar	7	8	11	17	
Flouresta (I/maim)	2 bar	8	13	21	26	
Flow rate (I/min)	3 bar	9	15	25	34	
	4 bar	11	19	29	40	



CONNECT TWO HOSES WITH DIFFERENT DIAMETERS WITH JUST ONE PRODUCT AND CREATE A LINE OF ANY LENGTH.

METAL-JET

This comprehensive range offers the best in quality, made from chrome-plated brass, with lots of details that really make a difference. Brass guarantees high resistance and durability and the chrome-plating preserves the shine of the products over time, avoiding oxidation. Claber's Metal-Jet range is composed of a variety of products – tap connectors, automatic couplings, connectors, flow diverters, spray nozzles and pistols – all with Quick-Click couplings, making them compatible with plastic automatic couplings too. Metal-Jet connectors also have 6 internal spheres to guarantee automatic connection and a perfect seal. The screw collar with an exclusive Claber design profile distinguishes the product and improves the grip. The adjustable multipurpose pistols combine robust metal parts with an ergonomic plastic grip, helping you to select the best jet for all of your gardening needs.



3/4" M (20-27 mm) THREADED ADJUSTABLE TWO-WAY ADAPTER

709601



ADJUSTABLE TWO-WAY TAP CONNECTOR



1" (26-34 mm) TAP CONNECTOR WITH 3/4" (20-27 mm) ADAPTER

709603





3/4" (20-27 mm) TAP CONNECTOR 709604





1/2" (15 - 21 mm) TAP CONNECTOR 709605





Adjustable two-way adapter, 3/4'' (20-27 mm) thread, in chrome-plated brass. Independent water flow adjustment on the two lines. Secure fit on taps with 3/4'' (20-27 mm) thread.

Used to install two electronic timers, pressure reducers, etc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9601		4	14,5 x 12 x 5	22,5 x 15,5 x 13,3	0,005	1,97	400	8 000625 096015



Two-way connector in chrome-plated brass.

Used to connect up two lines fitted with Quick-Click automatic couplings to just one water outlet.

Taps adjust independently. Secure fit on taps with 3/4" (20-27 mm) thread.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9602	4	14,5 x 12 x 5	22,5 x 15,5 x 13,3	0,005	1,53	400	8 000625 096022



Tap connector in chrome-plated brass. For connecting automatic couplings to the tap. Female 1" (26-34 mm) thread and 3/4" (20-27 mm) adapter.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9603	C 10	7 x 12 x 3	19,5 x 19,3 x 8,5	0,003	1,14	1440	8 000625 096039



Tap connector in chrome-plated brass. For connecting automatic couplings to the tap. Female 3/4" (20-27 mm) thread.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9604	<u> </u>	7 x 12 x 3,6	19 x 16 x 9,3	0,003	0,64	1800	8 000625 096046



Chrome-plated brass tap connector. For connecting automatic couplings to the tap. Female 1/2" (15 - 21 mm) thread.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9605	<u> </u>	7 x 12 x 2,4	19 x 12,8 x 8,5	0,002	0,54	2160	8 000625 096053

TWO-WAY CONNECTOR

709606

709607

709608

709609





THREE-WAY CONNECTOR

1/2" M (15 - 21 mm) CONNECTOR



Two-way connector in chrome-plated brass. Connects two hoses with automatic couplings in series.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9606		10	7 x 12 x 2	19 x 12,8 x 8,5	0,002	0,70	2160	8 000625 096060



Three-way connector in chrome-plated brass. Splits the irrigation line into two different directions. Connects three hoses with automatic couplings.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9607	8	7 x 12 x 1,9	19 x 12,8 x 8,5	0,002	1,16	1728	8 000625 096077



Chrome-plated brass connector with 1/2" (15 - 21 mm) male thread. For connecting any sprinkler or accessory with 1/2" female thread to the Quick-Click system at the water inlet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9608		10	7 x 12 x 2,6	19 x 12,8 x 8,5	0,002	0,55	2160	8 000625 096084



Chrome-plated brass connector with 3/4" (20 - 27 mm) male thread. For connecting any sprinkler or accessory with 3/4" female thread to the Quick-Click system at the water inlet.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9609	10	7 x 12 x 2,8	19 x 12,8 x 8,5	0,002	0,62	2160	8 000625 096091



3/4" M (20 - 27 mm) CONNECTOR



1/2"-5/8" AUTOMATIC COUPLING

709610



1/2"-5/8" AUTOMATIC COUPLING W/STOP 709611





3/4" AUTOMATIC COUPLING

709613





3/4" AUTOMATIC COUPLING W/STOP

709614





1/2"-5/8" MENDER

709612



3/4" MENDER

709615





Automatic coupling for 1/2" (12,5 mm) - 5/8" (15 mm) diameter hoses in chrome-plated brass. Equipped with 6 internal bearings to guarantee automatic connection and perfect seal. The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves grip.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9610	8	7 x 12 x 3	19 x 16 x 9,3	0,003	0,92	1440	8 000625 096107



Automatic coupling for 1/2''(12,5 mm) - 5/8''(15 mm) diameter hoses in chrome-plated brass. Provided with an automatic water stop valve. Fits onto the end of the hose.

Disconnect the coupling to stop the water flow.

Equipped with 6 internal bearings to guarantee automatic connection and perfect seal. The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves grip.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9611	8	7 x 12 x 3	19,5 x 19,3 x 8,5	5 0,003	0,93	1440	8 000625 096114



Automatic coupling for 3/4" (19 mm) diameter hoses in chrome-plated brass. Equipped with 6 internal bearings to guarantee automatic connection and perfect seal. The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9613	8	7 x 12 x 4,5	19,5 x 19,3 x 8,5	0,003	1,15	1152	8 000625 096138



Automatic coupling for 3/4" (19 mm) diameter hoses in chrome-plated brass. Provided with an automatic water stop valve. Fits onto the end of the hose. Disconnect the coupling to stop the flow of water. Equipped with 6 internal bearings to guarantee automatic connection and perfect seal.

The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9614	8	7 x 12 x 4,5	19,5 x 19,3 x 8,5	0,003	1,18	1152	8 000625 096145



Mender for 1/2"(12,5 mm) - 5/8" (15 mm) diameter hoses in chrome-plated brass. Repair a damaged hose: cut the hose at the point where the leak is and use it to join the two sections together.

The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9612	8	7 x 12 x 3,3	19 x 16 x 9,3	0,003	0,74	1440	8 000625 096121



Mender for 3/4" (19 mm) diameter hoses in chrome-plated brass.

Repair a damaged hose, cut the hose at the point where the leak is and use it to join the two hose lengths together.

The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9615	8	7 x 12 x 4	19,5 x 19,3 x 8,5	5 0,003	1,16	1152	8 000625 096152

SPRAY NOZZLE WITH ADJUSTABLE JET 709620





BASIC METAL PISTOL

709619



SPRAY PISTOL

709621



8 PATTERNS MULTIFUNCTION PISTOL 709622





Spray nozzle with adjustable jet: from fully open to fully closed (mist or concentrated). Made from chrome-plated brass. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9620	\bigcirc	8	14,5 x 12 x 2,8	22,5 x 15,5 x 13,3	0,005	1,20	800	8 000625 096206



Chrome-plated metal spray pistol. Flow adjustment lever and exclusive device for selecting and fixing the desired jet. Quick-Click coupling.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9619	<u></u> 5	14,5 x 20 x 3,1	19 x 16,5 x 24,5	0,008	1,20	280	8 000625 096190



Spray pistol in chrome-plated metal. Rubber ergonomic grip. Water flow adjustment lever and lock for desired jet. Quick-Click coupling.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9621		14,5 x 18 x 3,5	19 x 16,5 x 24,5	0,008	1,40	224	8 000625 096213



Multifunction pistol in chrome-plated metal. Rubber ergonomic grip. Water flow adjustment lever and lock for desired jet. Turn the ring nut for 8 different spray patterns. Quick-Click coupling.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9622	<u> </u>	14.5 x 21 x 6	19 x 16.5 x 24.5	0.008	1.5	224	8 000625 096220

18

23

25

I/min

8

11

16

IMPACT METAL-JET SPIKE

709623





Chrome-plated metal pulsating sprinkler for 0° to 350° sector irrigation or 360° continuous rotation. Mounted on a metal spike for fixing securely into the ground. Provided with diffuser screw for uniform irrigation and deflector to lower the height of the jet if necessary. Option to connect two sprinklers in line (using the 3/4" threaded outlet).

	pressure 1-3 bar.
Maximum	irrigated area 500 m ² .

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9623	3	14 5 v 31 v 6	32 v 11 v 18	0.006	1 20	210	8 000625 096237



COMPLETE WITH ACCESSORIES FOR EVERY TYPE OF CONNECTION AND USE, THE METAL-JET RANGE IS THE BEST CHOICE FOR THOSE LOOKING FOR DURABILITY AND STRENGTH.

1,0

2,0

3,0

255

415

500

OPTION FOR CONTINUOUS ROTATION OR IN 0°-350° SECTORS

PERFECT STABILITY THANKS TO THE METAL SPIKE



OSCILLATING SPRINKLERS

The Compact line is the ideal choice for watering your lawn, as it has an adjustable jet that simulates light rain.

The elegant design of the outer casing in ABS, a sturdy turbine engine and resistant gears make this line one of Claber's most successful. Thanks to the special Aqua Control system, it could not be any easier to adjust the coverage of the area you want to water with just 2 fingers!



I/min

9.1

14.1

I/min

10,5

19,0

21,0

15.5

12,4

15,7

COMPACT-160 PROMO

708740





Oscillating sprinkler, 14 precision punched water holes providing uniform distribution with natural rain effect. Control knob for selection of 4 main spray patterns with many intermediate steps. Irrigated area max 180 m².

Bar	m²	m	I/min
1	78	11,0 x 7,0	8,0
2	133	14,0 x 10,0	11,0
3	165	16,0 x 11,0	13,0
4	181	16,0 x 11,0	15,0

Bar

1

3

Bar

m²

100

215

320

2

m²

98

169

192

m

11.5 x 8.5

14,5 x 11,5

17.5 x 11.0

16,5 x 10,0

m

10,5 x 9,5

16.0 x 13.4

18,8 x 16,2

19,2 x 16,7

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8740	4	41 x 10 x 15,5	46,2 x 26,2 x 17	0,021	1,66	140	8 000625 087402

COMPACT-12

708748





Oscillating arm in ABS, available with 12 holes, this model is supplied complete with hydraulic motor and self-lubrificating nonwearing acetal resin gears. The new large-diameter turbine offers high performance even at low pressure, while the new watering selection device, comprising a pratical click-operated selector provides 5 different water settings. A sled in aluminium sections (Ø 10 mm) ensures excellent stability and easy trailing.

Irrigated area máx 190 m².

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8748		32 x 8,5 x 19	20 x 30 x 33	0,019	1,86	144	8 000625 087488

COMPACT-20 **AQUA CONTROL**

708753





The oscillating arm in ABS complete with the exclusive "Aqua Control" system allows to vary coverage of the irrigated area as required. Available with 20 holes and 8 adjustable nozzles (complete with knurled end for secure connection), this model is supplied complete with hydraulic motor and self-lubrificating non-wearing acetal résin gears. The new large-diameter turbine offers high performance even at low pressure, while the new watering selection device, comprising a pratical click-operated selector provides 5 different water settings. A sled in aluminium sections (Ø 10 mm) ensures excellent stability and easy trailing. Irrigated area max 320 m².

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8753		32 x 8,5 x 19	20 x 30 x 33	0,019	1,87	144	8 000625 087532

COMPACT-16 SUPER METAL





The guar The

mot large com easy trailing.

wwlrrigated area max 290 m².

OSCIIIALING AIUMINIUM AIM WILN TO DIASS NOZZIES	Bar	m²	m	I/min
rantees regular water jet operation.	1	83	10,1 x 8,2	11,8
large sized sturdy ABS body houses the hydraulic	2	202	16,4 x 12,3	18,0
tor which may be opened for inspection while the	3	269	19,2 x 14,0	21,5
e-section aluminium elements (Ø 15 mm), which nprise the sled base, quarantee excellent stability and	4	290	19,9 x 14,6	25,0
riprise the sied base, guarantee excellent stability and				

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8743		43 x 9 x 22,5	25 x 30 x 45	0,034	2,48	72	8 000625 087433

STATIC AND ROTATING **SPRINKLERS**

Claber static and rotating sprinklers offer you all of this: a great look, ease of use, versatile features and a vast range of solutions to meet different needs. From compact models, easy to move across the lawn, to models on spike to be firmly anchored into the ground, without damaging your grass.

Watering is always even and just like natural rainfall, even at low water pressure.



MULTIFUNCTION SPRINKLER







Made entirely in ABS. Special round shape allows easy dragging over lawns, between flower beds and plants. Shaped upper section for easily lifting.

Flange rotates to provide 6 different functions. Irrigated area max 64 m².

Bar	m²	Øm	I/min
1	36	6,0	17,5
2	64	8,0	24,7
3	64	8,0	30,3
4	64	8,0	34,0

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8654		19,3 x 25,5 x 7,8	25 x 23 x 26	0,015	1,30	135	8 000625 086542

ROLLINA

708656







New compact, contoured design for easy movement over lawns.

The new 5-blade rotor intercepts the water jets to create a fine natural rain effect. Irrigated area max 20 m².

Bar	m²	Øm	I/min
1	13	4,0	18,0
2	16	4,5	25,0
3	20	5,0	30,0
4	20	5,0	35,0

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8656	<u></u> 5	15,4 x 24 x 7	28 x 25 x 19	0,013	0,97	240	8 000625 086566

TURBOSPRUZZO

708658







New compact, contoured design for easy movement

Stationary sprinkler produces a fine spray for watering circular areas.

Irr	ia	ate	d a	are	a	max	63	m^2 .

Bar	m²	Ø m	I/min
1	58	9,0	18,0
2	63	9,0	24,0
3	57	8,0	27,0
4	47	8,0	30,0

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8658		15,4 x 24 x 6,5	28 x 25 x 19	0,013	1,08	288	8 000625 086580

TURBOSPIKE

708660





Stationary sprinkler on plastic spike with natural rain effect in circle pattern. Irrigated area max 40 m².

Bar	m²	Ø m	I/min
1	30	6,0	7,8
2	30	6,0	10,7
3	40	7,0	12,9
4	40	7,0	14,8

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8660	C 12	16 x 30 x 5,5	25 x 59 x 19	0,028	1,47	288	8 000625 086603



IDROSPRAY 2000

708675





Rotating 2-arm sprinkler constructed entirely in ABS. Special rounded design enables easy movement over lawn. Offset nozzle jets in fan arrangement achieve a uniform spray and magnificent water games. Adjustable nozzles optimise performance also at low pressure. Covers circular areas with light rain effect. Irrigated area max 177 m².

Bar	m²	Øm	I / min
1	123	12,5	14,0
2	177	15,0	17,8
3	143	13,5	20,5
4	123	12,5	23,0

code	packaging qty	y pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8675	2	21 x 27 x 12	23 x 25 x 26	0,015	1,18	90	8 000625 086757

AQUALUX 2000

708685





Rotating 2-arm sprinkler constructed entirely in ABS. Special rounded design enables easy movement over lawn. Adjustable nozzles optimise performance also at low pressure

low pressure.

Covers circular areas with light rain effect.

Irrigated area max 113 m².

Bar	m²	Øm	I / min
1	87	10,5	4,9
2	113	12,0	7,1
3	104	11,5	8,4
4	87	10,5	9,5

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8685		17 x 22 x 7,5	23 x 25 x 26	0,015	1,26	180	8 000625 086856

IDROJET 2000







Rotating 3-arm sprinkler constructed entirely in ABS. Special rounded design enables easy movement over lawn. Adjustable nozzles optimise performance also at low pressure.

low pressure.

Covers circular areas with light rain effect.

Irrigated area max 113 m².

Bar	m-	уm	I / MIN
1	75	9,8	7,0
2	113	12,0	9,9
3	104	11,5	11,9
4	95	10,0	13,3

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8694	4	17 x 22 x 7,5	23 x 25 x 26	0,015	1,28	180	8 000625 086948

SPIKE-JET

708661





Static sprinkler with a new design. It can be positioned where needed using the special shaped stake, designed to guarantee maximum stability in the ground. It evenly waters circular areas. Quick-Click standard connection.

Irrigated area max 54 m².

Bar	m²	Øm	I/min
1	28	6,0	17,5
2	44	7,5	24,7
3	53	8,0	30,3
4	54	8,5	34,0

64

64

55

55

20

38

64

50

9.0

9,0

8.5

Ø m

5,0

7.0

9,0

8.0

4.2

5,9

7.0

7,7

I/min

5,6

8.1

9,8

11,5

1

3

Bar

2

3

code	packaging qt	ty p	ack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8661		1	5,4 x 30 x 7,2	40 x 18 x 18	0,013	0,57	350	8 000625 086610

SPRAY-JET

708663





Rotating 2-arm sprinkler with adjustable nozzles and a new design.

It can be positioned where needed using the special shaped stake, designed to guarantee maximum stability in the ground.

Covers circular areas with light rain effect. Quick-Click standard connection.

Irrigated area max 64 m².

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8663		15,4 x 30 x 7,2	40 x 18 x 18	0,013	0,73	350	8 000625 086634

VARIO-JET

708662





Multifunction static sprinkler with a new design. It features four different jets, which can be selected by turning the head: spray, blade jet, 360°, 180°. The stake has been designed to guarantee maximum stability.

Quick-Click standard connection. Irrigated area max 64 m².

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8662	<u></u>	15.4 x 30 x 7.2	40 x 18 x 18	0.013	0.83	350	8 000625 086627

PULSATING SPRINKLERS

Pulsating sprinklers are the ideal solution for watering at long distances: with the Impact line, Claber takes performance and versatility to new heights.

The head design guarantees that the jet is well distributed, with no water leakage from the sides. The reverse mechanism means you can water a targeted area between 0° and 360°. Alternatively, you can lift up the mechanism so that the head turns freely and waters the full circular area evenly. The stainless-steel pin and wear-resistant bronze bushing guarantee maximum durability. The steel tripod with an epoxy powder coating is ultra-stable and height-adjustable (tripod kit, complete with threaded tube).



3/4" (20-27 MM) IMPACT FEMALE HEAD





Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation.
3/4"(20-27 mm) female thread.
Diffuser screw assures even water distribution.
Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures.

cheor	Diffuser screw assures even water distribution. Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures. Stainless steel pin and wear-resistant bronze bushing.
-------	---

	Stainless steel pin and wear-resistant bronze busning.										
code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet					
8705	<u></u> 5	15,4 x 24 x 4,8	28 x 25 x 13	0,009	0,95	360					





IMPACT ON STAKE

708707





Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation, mounted on steady twin-point stake.

Diffuser screw assures even water distribution. Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures.
Stainless steel pin and wear-resistant bronze bushing.

Irrigated area max 397 m².

Bar	m²	Ø m	I/min
1	214	16,5	9,3
2	330	20,5	11,9
3	380	22,0	14,8
4	397	22,5	16,9

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8707	<u></u> 5	10,7 x 28 x 4,5	28 x 25 x 13	0,009	1,78	360	8 000625 087075

IMPACT PLASTIC SPIKE

708708





Pulsating sprinkler head providing 0° to 360° circular coverage or continuous rotation, mounted on twinpoint plastic stake. Diffuser screw assures even water distribution. Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures.

Stainless steel pin and wear-resistant bronze bushing. Irrigated area max 397 m².

Bar	m²	Ø m	I/min
1	214	16,5	9,3
2	330	20,5	11,9
3	380	22,0	14,8
4	397	22,5	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8708	\bigcirc	5	16 x 7 x 39	20 x 39,5 x 19,5	0,016	1,26	240	8 000625 087082

IMPACT TRIPOD







Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation, mounted on steady aluminium tripod. "L" water connection at base. Diffuser screw assures even water distribution.
Self-adjusting up to 4 bar, adjustment device for optimal

setting at high water pressures.
Stainless steel pin and wear-resistant bronze bushing.

Irrigated area max 491 m².

Bar	m²	Ø m	I/min
1	227	17,0	9,3
2	346	21,0	11,9
3	437	23,6	14,8
4	491	25,0	16,9

code	packaging q	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8709		4	9,7 x 38 x 6	18 x 40 x 18	0,012	1,81	280	8 000625 087099

IMPACT TRIPOD KIT





Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation, mounted on tripod with adjustable opening and height. "L" water connection at base. Diffuser screw assures even water distribution. Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures. Stainless steel pin and wear-resistant bronze bushing. Steel tripod with epoxy powder paint finish, with 3/4" (20-27 mm) threaded

aluminium tube for height adjustment.
Tool-free assembly, comes in practical compact package
Irrigated area max 572 m ² .

Bar	m²	Ø m	I/min
1	296	19,4	9,3
2	401	22,6	11,9
3	531	26,0	14,8
4	572	27,0	16,9

code	packaging qt	ty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8715			12 x 59,5 x 8,8	60 x 26 x 10	0,016	4,27	96



			4.0	l =	j -i.,				•	
				-		See Assessed				
		8740	8748	8753	8743	8654	8656	8658	8660	
ТҮРЕ			OSCIL	LATING			STATIC			
SUPPORT		base	base	base	base	base	base	base	stake	
MATERIALS		Aluminium > ABS <	Aluminium > ABS <	Aluminium > ABS <	Aluminium > ABS <	> ABS <	> PP <	> PP <	> PP <	
Quick-Click CONNECTION		✓	√	√	✓	✓	√	√	√	
FUNCTIONS		4	5	5	5	6	1	1	1	
						·	•		•	
						•				
SHAPE OF IRRIGATION AREA										
SHALL OF HUNDAHON AREA						•				
						2;5				
OPERATING PRESSURE (BAR)		1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	
IRRIGATED AREA (m²)	min	78 m²	98 m²	100 m ²	83 m²	36 m ²	13 m ²	47 m²	28 m ²	
ming/ited /ite/ (iii)	max	181 m ²	192 m²	320 m ²	290 m ²	64 m ²	20 m ²	63 m ²	39 m ²	
AREA (m)	min	11,0 x 7,0	11,5 x 8,5	10,5 x 9,5	10,1 x 8,2	6,00				
ALLA (III)	max	16,0 x 11,0	17,5 x 11	19,2 x 16,7	19,9 x 14,6	8,00				
DIAMETER (m)	min						4,00	8,00	6,00	
DIAMETER (III)	max						5,00	9,00	7,00	
FLOW RATE (I/min)	min	8,00	9,10	10,50	11,80	17,50	18,00	18,00	7,80	
TEOW INTE (I/IIIIII)	max	15,00	15,70	21,00	25,00	34,00	35,00	30,00	14,80	

	1	7				T			*	*		
	8661	8662	8675	8685	8694	8663	8705	8707	8708	8709	8715	9623
ST	ATIC			ROTA	TING				PULS	ATING	I	
	stake	stake	base	base	base	stake		stake	stake	tripod	tripod	stake
	> PP <	> PP <	> ABS <	> ABS <	> ABS <	> PP < > ABS <	> ABS <	Steel > ABS <	> PP < > ABS <	Aluminium > ABS <	Steel Aluminium > ABS <	Chrome-plated metal
	√	√	✓	✓	✓	✓		✓	✓	✓	✓	✓
	1	4	1	1	1	1	2	2	2	2	2	2
						0	0	•	•		•	•
		•						•	•		•	
							•	•	•	•	•	•
		•										
	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 3
	28 m ²	20 m ²	123 m ²	87 m ²	75 m ²	55 m ²	214 m ²	214 m ²	214 m ²	227 m ²	296 m ²	255 m ²
	54 m ²	64 m ²	177 m²	113 m ²	113 m ²	64 m ²	397 m ²	397 m ²	397 m ²	491 m ²	572 m ²	500 m ²
	6,00	5,00	12,50	10,50	9,80	8,50	16,50	16,50	16,50	17,00	19,40	18
	8,50	9,00	15,00	12,00	12,00	9,00	22,50	22,50	22,50	25,00	27,00	25
	8,30	5,60	14,00	4,9	7,00	4,20	9,30	9,30	9,30	9,30	9,30	8,00
	16,00	11,50	23,00	9,50	13,30	7,70	16,90	16,90	16,90	16,90	16,90	16,00

NEW FOR 2023

HOSE REELS AND CARTS

Claber offers the most comprehensive range of hose reels and carts for all of your needs in the garden or on your patio or terrace. Versatile, sturdy and easy to manoeuvre, they are also available as a kit, complete with hose, spray nozzle and accessories, with a metal structure for top performance.

THE COMPACT SOLUTIONS

Thanks to their compact size, Claber hose reels are the ideal solution for small and medium-sized gardens and terraces. Their unmistakeable design is also multi-purpose, as they can be used on the ground or mounted on the wall. Lightweight, stable and easy to manoeuvre, they can be assembled in a flash, without any tools. They also come in a kit complete with hose, accessories and a spray nozzle or pistol.



ECO 0



"Eco 0" wall hanger for hose. Reinforced grooves prevent change in form. Hooking up hose and handgrip.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8866	8	25 x 15,1 x 16,3	27 x 47 x 18	0,022	2,42	280	8 000625 088669

MINI-SET BALCONY





Compact hose reel with accessories, ready-to-use. Provided with retractable handle for ease of transport and placement. Wall-mounted. Easy-to-store, thanks to its conveniently located recesses, designed to house couplings, tap connector and pistol. Includes: 10 metres of \emptyset 9-13 mm hose, 1 x 3/4" (20-27 mm) connector with 1/2" (15-21 mm)

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9031		21 x 24 x 14	20 x 24 x 14	0.007	1,56	96	8 000625 090310





Compact hose reel with accessories, ready-to-use.

Provided with retractable handle for ease of transport and placement.

reducer, 2 x automatic couplings, 1 x multifunction pistol with aerator.

Wall-mounted. Easy-to-store, thanks to its conveniently located recesses, designed to house couplings, tap connector and pistol.

Includes: 10 metres of \emptyset 9-13 mm hose, 1 x 3/4"(20-27 mm) connector with 1/2"(15-21 mm) reducer, 2 x automatic couplings, 1 x shower pistol.

code	packaging q	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9032		1	21 x 24 x 14	20 x 24 x 14	0,007	1,54	96	8 000625 090327

MINI-SET UTILITY





Compact hose reel with accessories, ready-to-use.

Provided with retractable handle for ease of transport and placement.

Can be wall-mounted. Easy to store away tidily with places to house the pistol, couplings and connectors.

It includes: 10 metres of 9-13 mm hose, 1 tap connector 3/4" (20-27 mm) with 1/2" (15-21 mm) reducer, 2 automatic couplings, 1 spray pistol with dual jet (concentrated or fan).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9028	1	21 x 24 x 14	20 x 24 x 14	0,007	1,33	96	8 000625 090280

AQUAPONY

708887





It can be free standing or wall mounted. Space-saving design. Complete with automatic coupling. Compact packaging easy to store and display.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8887		40 x 40 x 12	40 x 40 x 12	0,019	1,60	54	8 000625 088874

AQUAPONY KIT

708884





Aguapony removable reel with:

- -15 m of Ø 1/2" (12,5 mm) Silver Elegant Plus hose
- 3/4" (20-27 mm) tap connector + 1/2" (15-21 mm) reducer 4 automatic couplings (one with aquastop)
- spray nozzle.

	and and a second		L: ()				
code	packaging qty	pack size (cm)	DOX SIZE (CM)	volume (m²)	weight (kg)	pcs/pailet	
8884		27 x 32 x 30	27 x 32 x 30	0,026	3,40	30	8 000625 088843

KIROS







Removable wall-mounted hose reel in easy assembly kit without use of tools. Supplied complete with wall brackets (2 Pcs) and automatic coupling for hose connection. Compact pack dimensions.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8921		40 x 40 x 12	40 x 40 x 12	0,019	2,00	54	8 000625 089215

KIROS KIT







Wall-mounted hose reel with:

- 20 m Silver Elegant Plus hose Ø 1/2" (12,5 mm) 3/4" (20-27 mm) tap connector + 1/2" (15-21 mm) reducer
- 4 automatic couplings (one with aquastop)
- spray nozzle
- 2 wall brackets.

8945	$ \bigcirc $	1	40 x 32 x 31	40 x 31 x 32	0,039	4,40	18	8 000625 089451
------	--------------	---	--------------	--------------	-------	------	----	-----------------

WALL BRACKETS

708711





For wall mounted installations of Claber hose reels.

Complete supply of:

- 2 wall brackets
- screws and nuts
- expansion bolts
- hose reel retainer wingnut.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8711	10	7,9 x 15,7 x 3,8	25 x 19 x 10	0,005	1,10	1440	8 000625 087112

SET AQUAPASS





Aquapass the original hose cassette with water thru-feed either with hose partially or totally wound up. Includes 15 m of round hose diam. 15 mm combining the performance of a traditional hose reel with that of a portable hose cassette.

Compact high impact, lightweight housing, it is supplied with automatic Quick-Click couplings, 1,5 m extension hose, jet spray nozzle, wall bracket that allows convenient hanging on the wall of Aquapass.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8974		40 x 40 x 12	40 x 40 x 12	0,019	4,50	54	8 000625 089741

THE ESSENTIALS

Claber's work on its carts also continues to develop, offering several benefits both in store and in the garden.

Made of sturdy plastic, these models can be easily assembled, without needing any tools.

This is thanks to the new assembly mechanism for the flanges and the reinforced drum.

The new plastic handle is ergonomic and ensures a comfortable grip; a feature that has also shrunk the size of the packaging, now even more compact and easier to transport.



ECOSEI

708980







Comes disassembled in a kit, for rapid, easy assembly without tools. Ergonomic plastic handle. Sturdy, lightweight rust-proof aluminium frame. New cross sections without sharp edges, with tubular strengthening structure. Reel drum turns smoothly on delrin bearings.

Contoured, partly enclosed wheels for movement between even the tightest spaces. Coupling supplied for hose connection; hose rack holder included. Compact packaging to facilitate transport, storage and display in retail outlets.



ECOSEI KIT

708981







The kit consists in the hose cart Ecosei disassembled, packed in a carton supplied complete with:

- 20 m of 1/2" (12,5 mm) Silver Elegant Plus hose
- tap connector 3/4" (20-27 mm)+ reducer 1/2" (15-21 mm)
- 4 couplings (2 for preparing the extension)
- spray nozzle
- hose rack holder.

code	packaging qty	ty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8981			60 x 40 x 13	60 x 40 x 13	0,030	5,40	32	8 000625 089819

SILVER-AL

708977







Comes disassembled in a kit, for rapid, easy assembly without tools. Ergonomic plastic handle.

Ergonomic plastic handle.
Sturdy, lightweight rustproof aluminium frame.
New cross sections without sharp edges, with tubular strengthening structure.
Reel drum turns smoothly on delrin bearings.
Contoured, partly enclosed wheels for movement between even the tightest spaces.
Coupling supplied for hose connection; hose rack holder included.
Compact packaging to facilitate transport, storage and display in retail outlets.



EXTENSION

708962



1,5 m Ø 1/2" (12,5 mm) extension hose with automatic Quick-Click couplings and 3/4" - 1/2" tap connector.

code	packaging o	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8962		12	19 x 38 x 2,7	39 x 39 x 12	0,02	4,20	288	8 000625 089628



GENIUS®, NUMBER ONE FOR MEDIUM-SIZED GARDENS

Reinforced cross-bars, a special anti-twist groove and a lower centre of gravity to enhance its stability: these are the features that make Genius the ideal cart for medium-sized gardens.

Both handy and sturdy, they can be used to unwind up to 100 metres of hose, depending on the model, while still being practical to use. The winding knob has been carefully studied to guarantee a comfortable grip and to make the hose easy to unwind and rewind. All with the same guaranteed Claber quality.

The aluminium frame is rustproof, sturdy and quick and easy to assemble without the need of tools.





8 000625 088645

GENIUS 60

708862







Genius hose cart, ideal for medium-sized gardens.
Comes disassembled in a kit for quick and easy assembly, without tools.
Lightweight, sturdy, rustproof aluminium frame.
Reinforced plastic drum, mounted on Delrin bearings, meaning it rewinds without causing friction. Easy-grip knob to make the hose handy to rewind.
Coupling supplied for hose connection; hose rack holder included.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8862		40 x 40 x 49	40 x 40 x 49	0,076	3,14	24	8 000625 088621

GENIUS 100

708872







Genius hose reel cart, ideal for large gardens. Comes disassembled in a kit for quick and easy assembly, without tools. Lightweight, sturdy, rustproof aluminium frame. Reinforced plastic drum, mounted on Delrin bearings, meaning it rewinds without causing

friction. Large size wheels covered in rubber giving high stability, ideal for heavier load. Easy-grip knob to make the hose handy to rewind. Coupling supplied for hose connection; hose rack holder included.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8872		38 x 38 x 58	38 x 38 x 58	0,083	4,20	22	8 000625 088720

KIT PRONTO 30

708864







Kit with Genius 60 hose cart, supplied complete with: - 30 m of Ø 1/2" (12,5 mm) Top-Black hose - tap connector, couplings and spray nozzle

- 1,5 m extension hose with couplings - hose rack holder.
- Ready-to-use.

code	packaging qty 1	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8864		40 x 40 x 49	40 x 40 x 49	0,076	7,90	24

READY TO USE

Our top-selling carts are delivered on pallets, always ready to use: whether displayed in store on practical pallets or at home, they are preassembled and come complete with hose, spray nozzle and all the accessories you need.

A solution that enhances product visibility and promotes self-service purchases.





Ready-to-use hose cart with a new design, equipped with a smaller drum (41 cm wide) to make it easier to use in narrow spaces. The telescopic handle is easy to close away by pressing on the two side levers.

Aluminium structure.

Carved wheels to move easily over any surface. Supplied with:

- 25 m 1/2" (12,5 mm) Silver Elegant Plus hose
- hose rack holder
- 4 automatic couplings (one with aquastop)
- spray nozzle
- tap connector
- hose rack holder.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8924	8	41 x 86 x 40	80 x 120 x 70	0,670	57,00	8	8 000625 089246





NEW FOR 2023



Ready-to-use hose cart with a new design, equipped with a smaller drum (41 cm wide) to make it easier to use in narrow spaces. The telescopic handle is easy to close away by pressing on the two side lowers.

Aluminium structure.

Carved wheels to move easily over any surface. Supplied with:

- 20 m 1/2" (12,5 mm) Aquaviva Plus hose
- hose rack holder
- 4 automatic couplings (one with aquastop)
- spray nozzle
- tap connector
- hose rack holder.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8933		8	41 x 86 x 40	80 x 120 x 70	0,670	45,00	8	8 000625 089338








Ready-to-use hose cart with a new design, equipped with a smaller drum (41 cm wide) to make it easier to use in narrow spaces. The telescopic handle is easy to close away by pressing on the two side

Aluminium structure.

Carved wheels to move easily over any surface.
Supplied with:

- 20 m 1/2" (12,5 mm) Top-Light hose
- hose rack holder
- 2 automatic couplings
- spray nozzle
- hosé rack holder.





NEW FOR 2023



Ready-to-use hose cart. Stainless aluminium frame, reinforced cross bars and PP drum.

Swivel knob.

Supplied complete with:

- 25 m of Silver Elegant Plus hose 5/8" (15 mm)
- hose rack holder
- 4 automatic couplings (one with aquastop)
- spray nozzle
- tap connector.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8858	12	40 x 46 x 37	80 x 120 x 110	1,060	85,00	12	8 000625 088584

GENIUS COMPACT PRONTO AQUAVIVA 20

GENIUS COMPACT PRONTO 25 708858



Ready-to-use hose cart. Stainless aluminium frame, reinforced crossbars and PP drum.
Swivel knob.

Supplied with:

- 20 m of Aquaviva Plus hose Ø 5/8" (15 mm)
- 4 automatic couplings (one with Aquastop)
- spray nozzle
- tap connector and hose holder.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8985	12	40 x 46 x 37	80 x 120 x 120	1,060	75,00	12	8 000625 089857

METAL JUNIOR PRONTO AQUAVIVA 25



Preassembled, ready-to-use hose cart. Aluminium structure with telescopic handle.

Pivoting winding handle and semi-enclosed wheels. Supplied with:

- 25 m of Aquaviva Plus hose Ø 1/2" (12.5 mm)
- 4 automatic couplings (one with Aquastop)
- spray nozzle
- tap connector and hose holder.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8865		12	40,5 x 53 x 44	80 x 120 x 120	1,150	70,00	12	8 000625 088652

Preassembled and ready-to-use metal hose cart. Aluminium structure and stainless steel drum.

Telescopic handle, pivoting winding handle and semienclosed wheels.

- Supplied complete with:
 25 m of Silver Elegant Plus hose Ø 5/8" (15 mm)
- hose rack holder
- multi thread connector
- 4 automatic couplings (one with aquastop)
- 1 spray nozzle.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8906		6	42 x 53,5 x 46	80 x 120 x 68	0,650	49,00	6	8 000625 089062

FOR THE PROS

The most high-performing Claber carts are for the most demanding customers, ideal for those looking for professional quality and handiness. The structure is made entirely of metal and the surface has been treated to make the product last over time.

The winding handle is handy and enables a smooth rewind of the hose. The drum is mounted on acetalic resin bearings, making it easier to rewind without causing friction. The perfect compromise for a sturdy yet handy product.



METAL 40





Removable hose reel for wall mounting, comes in a kit for easy, tool-free assembly. The frame and drum are constructed entirely of metal. Epoxy resin finish helps protect the metal work from the elements over time. Supplied complete with two wall brackets, universal hose connector and hose rack holder.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8890	\Leftrightarrow	1	40 x 40 x 12	40 x 40 x 12	0,019	5,40	54	8 000625 088904

METAL 60







The frame and drum are constructed entirely of metal. Resistant to elements thanks to its epoxy resin treatment.

Available in kit, easy to assemble without the use of tools.

Fitted with silent-block preventing the wear of metal on metal.

Large size wheels make the handling easier and guarantee stability on all type of ground surfaces.

Universal coupling supplied for hose connection, hose rack holder included.



ode	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/palle
891	\bigcirc 1	59 x 39 x 12	59 x 39 x 12	0.028	6.80	32



8 000625 089000

METAL GEMINI

708894





The frame and drum are constructed entirely of metal. Resistant to elements thanks to its epoxy resin treatment.

Available in kit, easy to assemble without the use of tools.
Fitted with silent-block preventing the wear of metal on metal.
Large size wheels make the handling easier and guarantee stability on all type of ground surfaces.

Equipped with 2 universal couplings.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8894	1	47 x 56 x 13	47 x 56 x 13	0,034	9,20	14	8 000625 088942

METAL PROFY

708895





The frame and drum are constructed entirely of metal. Resistant to elements thanks to its epoxy resin treatment. Available in kit, easy to assemble without the use of tools. Fitted with silent-block preventing the wear of metal on metal. Large size wheels covered in rubber giving high stability, ideal for heavier load. Water-thru of large diameter. Equipped with 2 universal couplings.



code	packaging qt	ty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8895			57 x 57 x 13	57 x 57 x 13	0,039	10,20	12	8 000625 088959

JUMBO

708900







Hose cart with 4 wheels. The frame and drum are constructed entirely of metal. Resistant to the elements, thanks to its epoxy resin surface treatment. Metal parts coupled by way of Silent block mounts.

Zinc coated parts.

Drum at 90°. Large diameter wheels with anti-flat tyres.

Comes with 2 metres Ø 5/8" (15 mm) extension and couplings.

Supplied as kit, quick and easy to assemble.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
2000	1	60 v 80 v 17	60 v 90 v 17	0.082	15 60	10

ROTOROLL® EVOLUTION

The Rotoroll Evolution makes watering your garden a joy, thanks to its innovative features and unmistakeable Claber quality. With its practical wall mount, Rotoroll is ready to use. Free 180° rotation means the hose unwinds smoothly in any direction, to ensure maximum comfort every time. Once you are done, the hose rewinds back up quickly and tidily, with no effort at all, thanks to the new automatic SLOW REWIND mechanism. High-quality materials that are resistant to knocks and exposure to sunlight make Rotoroll Evolution the perfect hose reel for any garden, large or small, as well as for your patio.



ROTOROLL EVOLUTION 10 m

708692



NEW FOR 2023



A hose reel with an exclusive automatic rewind mechanism, "Slow Rewind", for safe and easy use. Ready to use with 10 m of special non-deformable hose with an anti-friction surface for smooth, quick rewinding.

It is made from materials resistant to impact and sunlight, to ensure maximum durability. The reinforced resin wall support with a rustproof aluminium pin allows the hose reel to be angled up to 180° towards the direction of use. This avoids the hose being bent or obstructed.

It is equipped with an extension hose to connect it to a tap (1.5 m), a 3/4" (20-27 mm) connector, automatic couplings and a spray nozzle. It comes complete with a wall support, screws and plugs for wall mounting.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8692	1	41 x 38,5 x 24	41 x 38,5 x 24	0,038	6,00	20	8 000625 086924

ROTOROLL EVOLUTION 20 m

708696





A hose reel with an exclusive automatic rewind mechanism, "Slow Rewind", for safe and easy use. Ready to use with 20 m of special non-deformable hose with an anti-friction surface for smooth, quick rewinding. It is made from materials resistant to impact and sunlight, to ensure maximum durability.

The reinforced resin wall support with a rustproof aluminium pin allows the hose reel to swing through 180° towards the direction of use.

This avoids the hose being bent or obstructed. It is equipped with an extension hose to connect it to a tap (1.5 m length), a 3/4" (20-27 mm) tap connector, automatic couplings and a sprav nozzle.

It comes complete with a wall support, screws and plugs for wall mounting.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8696		49 x 26,5 x 38	49 x 26,5 x 38	0,050	9,50	12	8 000625 086962

ROTOROLL EVOLUTION 30 m

708697





A hose reel with an exclusive automatic rewind mechanism, "Slow Rewind", for safe and easy use. Ready to use with 30 m of special non-deformable hose with an anti-friction surface for smooth, quick rewinding.

It is made from materials resistant to impact and sunlight, to ensure maximum durability. The reinforced resin wall support with a rustproof aluminium pin allows the hose reel to be angled up to 180° towards the direction of use.

This avoids the hose being bent or obstructed. It is equipped with an extension to connect up to a tap (2 m length), a 3/4" (20-27 mm) tap connector, automatic couplings and a spray nozzle

8 000625 086900

It comes complete with a wall support, screws and plugs for wall mounting.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8697		57,5 x 28 x 51	57,5 x 28 x 51	0,080	14,00	12	8 000625 086979

ROTOROLL EVOLUTION FLOOR STAND

708690



Floor base for the Rotoroll Evolution 10, 20 m and 30 m automatic hose reels. This allows the hose reel to be positioned anywhere in the garden, provided it is located near a tap. It can swivel 360° and be easily fixed to a concrete slab using the screws and plugs supplied.

Size: 23 x 15,5 x 23 cm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8600	\sim	1	24 2 v 24 2 v 15	24 2 v 24 2 v 15	0.01	1 00	63

HOSE REELS AND CARTS									
ITEM	9031	9028	8887	8884	8921	8945	8980	8981	8977
FEATURES			THE COMPA	T SOLUTIONS			T	HE ESSENTIAL	.S
Wheels							√	✓	√
Aluminium structure			√	√	√	✓	√	√	✓
Plastic structure	✓	√	√	✓	✓	√	✓	✓	√
Steel structure									
Stainless steel structure									
Surface treatment with epoxy resin									
Assembled and ready to use	✓	✓		✓		√			
Kit	✓	√		√		√		√	
Telescopic handle									
No tools assembly			√		✓		✓	√	√
Automatic rewind									
TECHNICAL SPECIFICATIONS									
Weight (kg)	1,5	1,33	1,42	3,42	1,8	4,26	2,88	5,4	2,84
Size (cm)									
Width	21	21	42	42	42	42	48,2	48,2	47,2
Height	24	24	28,6	28,6	30	30	87	87	84,5
Depth	14	14	25,5	25,5	40	40	39	39	38
Hose reel capacity									
9 - 13 mm	10 m	10 m							
1/2" - 12,5 mm			20 m	15 m	40 m	20 m	60 m	20 m	60 m
5/8" - 15 mm					35 m		50 m		50 m
3/4" - 19 mm									
IDEAL FOR				'		'		'	
Small gardens	✓	√	√	✓					
Medium-sized gardens					✓	✓	✓	√	✓
Large gardens									
ACCESSORIES SUPPLIED									
Hose	✓	√		✓		√		√	
Automatic couplings	2	2	1	3+1 stop	1	3+1 stop	1	3+1 stop	1
Spray nozzle/Pistol	1	1		1		1		1	
Tap connector	1	1		1		1		1	
Hose rack							1	1	1
Universal couplings									
Extension									
Wall brackets					2	2			

												€ ∂				II.
8862	8872	8864	8933	8936	8985	8865	8906	8890	8891	8894	8895	8900	8692	8696	8697	8974
THE N.1	FOR MEDIUN GARDENS	M-SIZED		R	EADY TO US	SE			F	OR THE PR	OS			ROTOROLL AQU <i>l</i>	EVOLUTIOI APASS	V
✓	√	✓	√	✓	√	✓			✓	√	✓	✓				
✓	✓	✓	✓	✓	✓	✓										
✓	✓	✓	✓	✓	✓	✓							✓	✓	✓	✓
							✓	√	√	✓	√	√				
			,			•	,	√	√	√	√	√	,	,		_
		,	√	√	√	√	√						✓	√	√	√
		✓	✓ ✓	✓	✓	✓ ✓	✓ ✓							√	√	√
	√	√	V		V	V	V	√	✓	√	√	√	V			
	V	V						V		V			√	/	√	
3,14	3,73	7,4	4,45	3,8	5	5,05	7,2	4,1	5,2	7,2	8,2	17,4		8,5	12,6	4,15
47,4	58,3	47,4	41	41	45	49,3	47,6	51,5	52,7	64,3	72	61,5	21	25	26	34,4
73,5	80	73,5	54	54	73,8	81,6	85,4	47,8	88,3	86,5	89,6	100	34	60	66	37
44	48	44	40	40	44	54	43,5	38	43	46	46,6	88,3	37	39	46	11,5
60 m	100 m	30 m	20 m	20 m		25 m	25	85 m	85 m	130 m	165 m	165 m	10 m	20 m	30 m	15 m
50 m	90 m				20 m		25 m	60 m	60 m	100 m	130 m	130 m				
								40 m	40 m	60 m	75 m	75 m				
													✓			
√		✓	√	√	√	√	✓	√					V	✓		
•	√	•		,	•	<u> </u>		•	✓	✓	✓	√			√	
					I											
		✓	✓	✓	√	✓	✓						√	✓	✓	√
1	1	3+1 stop	3+1 stop	2	3+1 stop	3+1 stop	3+1 stop					3	1	1	1	1
		1	1	1	1	1	1						1	1	1	1
		1	1		1	1	1					1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1					
								1	1	2	2					
		1,5 m 1/2"										2 m 5/8"	1,5 m	1,5 m	2 m	1,5 m
								2					1	1	1	1

LIFE OUTDOORS

Claber has really thought of everything, suggesting practical solutions for gardens and living spaces, like the Malibù Shower, which can be placed on any surface thanks to its stable tripod base, to offer a relaxing moment in the midst of the greenery or at poolside.

For collecting everything in the garden, as well as at home or in the office, there's Carry Cart, the solid, extremely light multi-purpose cart that can be taken everywhere with ease thanks to the sculpted tread of its wheels, ideal for heavy loads too, used with robust Claber bags in recyclable material. Lastly, not forgetting Claber's cleaning solutions: from pistols with dynamic jets for cleaning walls and paving stones to brushes with soft bristles for washing cars and bicycles safely and gently.



CARRY CART ECO





The original cleaning up cart for the disposal of outdoor refuse (leaves, grass cutting, paper, etc.) Rust-resistant aluminium frame, it can be left outdoor as it is completely weatherproof. Push-in connecting system of the innovative hivestructure side upright.

The ring supporting the disposal bag can be adjusted to different heights thanks to the lever clamps, overcoming any problem due to the size of the collecting bags. Resin clamps fit the bag to the ring.

New snap-fit polypropylene support base is able to withstand heavy loads. Aluminium wheel-axle inserted into proper slots.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8934		59 x 44 x 16	59 x 44 x 16	0,041	3,16	16	8 000625 089345

SET OF 10 CLABER BAGS




Bags made of strong recyclable material, three times thicker than the average garden bag. Ideal for all gardening tasks.

Large holding capacity (110 l) and excellent resistance to thorns and pruned branches. Pack of 10 pcs.

code	packaging o	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8904		10	30 x 39 x 3	30 x 40 x 21	0,002	12	240	8 000625 089048

8 000625 087136

BAG CLAMPS





code

871

Claber resin clamps for fitting bags on Carry-Carts. 4 Pcs. Blister pack.

e	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
13		10	7,9 x 15,7 x 3,8	25 x 19 x 10	0.005	0,45	1440

8 000625 087747

WIPPY CAR

708774





Flexible wash brush for washing everywhere with ease. Long lasting synthetic bristles. Water flow control valve incorporated in handle.

code packaging qty pack size (cm) box size (cm) volume (m3) weight (kg) pcs/pallet 196 8774 0,015 1,52 7,5 x 43 x 5,5 27 x 47 x 12

WASHING PISTOL

708757





With frontal regulated flow. Fan-wise opening for washing action. Single trigger locking mechanism on/off regulator.

code packaging qty pack size (cm) box size (cm) volume (m3) weight (kg) pcs/pallet 8 000625 087570 8757 12 15,5 x 21,5 x 3,5 28 x 25 x 13 0.009 1,41 864

MALIBÙ



Disassembled shower for the garden, camping and balcony in rust-resistant aluminium. Lever clamp for height adjustament,

regulating water flow valve. Tripod suitable for any hard surface. Height 200 cm.

code	packagir	ng qty	pac	ck size (cm)			
708956 3 14,5 x 75 x 6							
box size (c	:m) v	volume (m	3)	weight (kg)	pcs/pallet		
77 x 20 x	16 (0,023		2,90	90		

WIPPY TURBO





A great cleaning action with a minimum of

Internal rotating brush driven by efficient impeller and gears makes a powerful whirpool which washes and cleans by itself without effort and undesired side splashing.

Excellent for quick washing of cars, caravans and

Complete with 120 cm extension handle in anodysed aluminium and water flow regulating valve pivoting head for various cleaning angles.

pack size (cm) code packaging gty 8841 20 x 94,5 x 9,6 box size (cm) volume (m3) weight (kg) pcs/pallet 105 x 22 x16 0,036 2,63 40

8 000625 088416

WIPPY AUTO

8843



Handy and easy to use for every washing need. Round profile of the bristles: utmost convenience and easy cleaning Sturdy brush head with synthetic bristles ensuring a good cleaning result and resistance to hot water.

Complete with 120 cm extension handle in anodysed aluminium and water flow regulating valve.

code	packaging	qty	pack size (cm)
8843	\bigcirc	2	26 x 84 x 7


pcs/pallet 90 x 27 x 14 0,034 1,92 36

8 000625 088430

code	packaging	g qty	pack size (cm)	
8843	\bigcirc	2	26 x 84 x 7	
box size (o	m) vo	olume (m³) weight (kg)	p

HAPPY FRESH EVOLUTION

Happy Fresh is the practical kit designed by Claber to cool down hot summer days on the patio, in the garden or on the terrace. The efficiency of the micro-mist nozzles means that the microscopic drops of water released into the atmosphere can reduce the temperature by up to 6 degrees, creating a feeling of well-being on even the hottest days. Quick to assemble, the Happy Fresh Kit can easily be hooked onto parasols, gazebos and sunshades; you just need a tap and an extension hose to enjoy only the pleasant side of summer. The system can be integrated with Aquauno Mist, the new versatile battery-powered Claber timer that allows you to set the frequency and run time of the nebulisation periods.

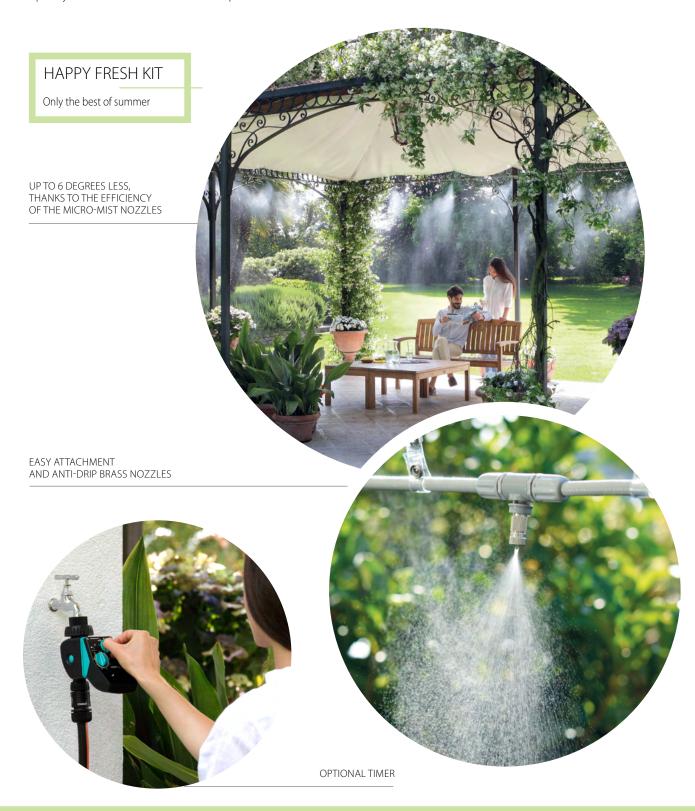

AQUAUNO MIST

708496



HAPPY FRESH EVOLUTION KIT 7,5 M 7090751





HAPPY FRESH EVOLUTION KIT 12 M 7090752









Automatic one-way timer, ideal for cyclical automation of both Happy Fresh cooling systems and watering systems on the terrace and in the garden. Easy programming with 2 rotary knobs: one to set the frequency and the other to select the run time. 27 programs can be selected for drip systems (yellow sector, run time from 2 to 90 mins every 12, 24 or 48 hours), 24 possible combinations for Happy Fresh systems (blue quadrant, run time from 5 to 45 seconds, every 1, 3, 5, 10 mins). Option of 5 min function test. Equipped with washable filter. Works with 9 V alkaline battery. Electronic part perfectly sealed.

Operating pressure from 0.5 to 10 bars. 100% checked and tested.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8496	2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,05	280	8 000625 084968



Misting kit ideal for cooling down outdoor spaces on hot summer days. The kit (made up of 7.5 m of hose, 6 micro-mist nozzles, connectors and fitting clips) can easily be hooked onto sunshades, gazebos and parasols and connected to the tap (using an extension hose fitting that is not provided). The micro-mist sprayers, with anti-drip brass nozzles, release a vapour of microscopic drops of water into the air, which allow the atmosphere to be cooled by up to 6°. The system can be automatically activated by adding the Aquauno Mist timer (not included). Operating pressure: 3-6 bar.

CONTAINS

Hose	7,5 m
In-line micro-mist nozzles	5
End-of-line micro-mist nozzle	1
Clips + screws to fasten hose	11 + 11

Spring clips to fasten hose	11
3/4" thread male connector	1
Connector for hose with washable filter	1

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90751		30 x 30,5 x 4,4	39 x 39 x 19	0,029	3,00	96	8 000625 907519



Misting kit ideal for cooling down outdoor spaces on hot summer days. The kit (made up of 12 m of hose, 9 micro-mist nozzles, connectors and fitting clips) can easily be hooked onto sunshades, gazebos and parasols and connected to the tap (using an extension hose fitting that is not provided). The micro-mist sprayers, with anti-drip brass nozzles, release a vapour of microscopic drops of water into the air, which allow the atmosphere to be cooled by up to 6°. The system can be automatically activated by adding the Aquauno Mist timer (not included). Operating pressure: 3-6 bar.

CONTAINS

Hose	12 m
In-line micro-mist nozzles	8
End-of-line micro-mist nozzle	1
Clips + screws to fasten hose	17 + 17

Spring clips to fasten hose	17
3/4" thread male connector	1
Connector for hose with washable filter	1

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90752		29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	0,97	108	8 000625 907526

Misting kit ideal for cooling down outdoor spaces on hot summer days. The kit (made up of 12 m of hose, 9 micro-mist nozzles, connectors and fitting clips) can easily be hooked onto sunshades, gazebos and parasols. The micro-mist sprayers, with anti-drip brass nozzles, release a vapour of microscopic drops of water into the air, which allow the atmosphere to be cooled by up to 6°. The kit also includes the battery-powered Aquauno Mist timer, which automatically turns on the cooling system at regular intervals. Operating pressure: 3-6 bar.

CONTAINS

Hose	12 m
In-line micro-mist nozzles	8
End-of-line micro-mist nozzle	1
Clips + screws to fasten hose	17 + 17

Spring clips to fasten hose	17
3/4" thread male connector	1
Connector for hose with washable filter	1
Aguauno Mist timer	1

8 000625 907533

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pal
90753	\Diamond	1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,40	108

HOSES









Claber has always been at the forefront for its above-ground irrigation hoses, offering high quality and non-toxic products. These hoses are made of carefully selected, non-recycled materials with no heavy metals or phthalates, safeguarding your health and the environment. They are also all UV and algae resistant.

Handiness, endurance and great aesthetics are guaranteed: Claber can make a difference.

TOP BLACK®

Kink-resistant hose with a special braided reinforcement that guarantees excellent stability at high water pressure; algae-resistant and UV-resistant.

The Top-Black hoses are 100% safe, as they contain no heavy metals or phthalates.



SILVER GREEN® PLUS

Anti-kink hose with a special helix-pattern knitting that guarantees excellent stability at high water pressure; algae- and UV-resistant. The Silver Green Plus hoses are 100% safe, as they contain no heavy metals or phthalates.



FLEXYFORT® GREEN

Knitted hose with special kink-resistant layer: it does not twist even at high pressure. Algae-resistant and UV-resistant.

The Flexyfort Green hoses are 100% safe, as they contain no heavy metals or phthalates.



SILVER ELEGANT® PLUS

Ultra-light braided hose that is easy to handle, kink-resistant, flexible, algae-resistant and UV-resistant. The Silver Elegant Plus hoses are 100% safe, as they contain no heavy metals or phthalates.



AOUAVIVA® PLUS

Easy-to-handle hose with algae-resistant, robust and flexible lining. The Aquaviva Plus hoses are 100% safe, as they contain no heavy metals or phthalates.



TOP-BLACK Ø 1/2" (12,5 mm) m 15 709037



TOP-BLACK Ø 1/2" (12,5 mm) m 25 709064



TOP-BLACK Ø 1/2" (12,5 mm) m 50 709036



TOP-BLACK Ø 5/8" (15 mm) m 15



TOP-BLACK Ø 5/8" (15 mm) m 25



NEW FOR 2023

TOP-BLACK Ø 5/8" (15 mm) m 50 709043



TOP-BLACK Ø 3/4" (19 mm) m 25 709048



TOP-BLACK Ø 3/4" (19 mm) m 50 709045



TOP-BLACK Ø 1" (25 mm) m 50 709046



code 9037	packaging qt	pack size (cm) Ø 38 x 9	box size (cm) Ø 38 x 9	volume (m³) 0,013	weight (kg) 1,95	pcs/pallet 78	
9064	1	Ø 38 x 10	Ø 38 x 10	0,025	3,20	66	8 000625 090648
9036	1	Ø 38 x 18	Ø 38 x 18	0,025	6,50	36	8 000625 090365







code 9040	packaging	qty 1	pack size (cm) Ø 38 x 9	box size (cm) Ø 38 x 9	volume (m³) 0,013	weight (kg) 2,30	pcs/pallet 78	8 000625 090402
9065		1	Ø 38 x 11	Ø 38 x 11	0,016	3,80	60	8 000625 090655
9043		1	Ø 38 x 20	Ø 38 x 20	0,028	7,65	30	8 000625 090433







code 9048	packaging	qty 1	pack size (cm) Ø 43 x 17,5	box size (cm) Ø 43 x 17,5	volume (m³) 0,032	weight (kg) 6,92	pcs/pallet 36	8 000625 090488
9045		1	Ø 45 x 25	Ø 45 x 25	0,050	13,50	16	8 000625 090457
9046		1	Ø 64 x 20	Ø 64 x 20	0,080	22,00	10	8 000625 090464







SILVER GREEN PLUS Ø 1/2" (12,5 mm) m 25 709060



SILVER GREEN PLUS Ø 1/2" (12,5 mm) m 50 709061

code 9060	packaging quality 1	pack size (cm) Ø 38 x 11	box size (cm) Ø 38 x 11	volume (m³) 0,016	weight (kg) 4,30	pcs/pallet 60	8 000625 090600
9061	1	Ø 38 x 18	Ø 38 x 18	0,026	8,50	36	8 000625 090617





SILVER GREEN PLUS Ø 5/8" (15 mm) m 25

709062



SILVER GREEN PLUS Ø 3/4" (19 mm) m 25 709063



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9062	1	Ø 38 x 13	Ø 38 x 13	0,019	5,40	54	8 000625 090624
9063	1	Ø 38 x 18	Ø 38 x 18	0,026	7,80	36	8 000625 090631







FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 15

709131




FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 25





FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 50 709133











NEW FOR 2023

FLEXYFORT GREEN Ø 5/8" (15 mm) m 15

709142



FLEXYFORT GREEN Ø 5/8" (15 mm) m 25

709145



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9142	1	Ø 38 x 9	Ø 38 x 9	0,013	2,50	72	8 000625 091423
9145	1	Ø 38 x 11	Ø 38 x 11	0,016	4,20	60	8 000625 091454
9136	1	Ø 38 x 22	Ø 38 x 22	0,031	8,40	30	8 000625 091362

FLEXYFORT GREEN Ø 5/8" (15 mm) m 50 709136









NEW FOR 2023

NEW FOR 2023

FLEXYFORT GREEN Ø 3/4" (19 mm) m 25

709149



FLEXYFORT GREEN Ø 3/4" (19 mm) m 50 709138





FLEXYFORT GREEN Ø 1" (25 mm) m 25 709150



FLEXYFORT GREEN Ø 1" (25 mm) m 50 709140



code 9149	packaging	qty 1	pack size (cm) Ø 40 x 17	box size (cm) Ø 40 x 17	volume (m³) 0,027	weight (kg) 6,15	pcs/pallet 36	8 000625 091492
9138		1	Ø 45 x 25	Ø 45 x 25	0,050	12,20	16	8 000625 091386
9150		1	Ø 48 x 25	Ø 48 x 25	0,058	10,25	16	8 000625 091508
9140		1	Ø 70 x 20	Ø 70 x 20	0,098	20,50	10	8 000625 091409










SILVER ELEGANT PLUS Ø 1/2" (12,5 mm) m 15

709123

SILVER ELEGANT PLUS Ø 1/2" (12,5 mm) m 25

709124









SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 15

709125

(15 mm) m 25

SILVER ELEGANT PLUS Ø 5/8"

9127

code packaging qty 9125 9126



pack size (cm)



volume (m3)



2,18

weight (kg)

pcs/pallet

78

30



8 000625 091263

709126







Ø 38 x 20

box size (cm)

0,030 7,25 8 000625 091270

SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 50

709127









SILVER ELEGANT PLUS Ø 3/4" (19 mm) m 25

709128



SILVER ELEGANT PLUS Ø 3/4" (19 mm) m 50 709129

code	packaging	qty

9128

9129





Ø 45 x 25



box size (cm)

0,025 0,050

volume (m³)

5,50 11,00

weight (kg)



pcs/pallet

36



8 000625 091294





1/2" (12,5 mm) SILVER ELEGANT PLUS HOSE KIT 15 m

708845



- Hose kit complete with:
 15 m of 1/2" (12,5 mm) Silver Elegant Plus hose
 3/4" (20-27 mm) multithread tap connector and 1/2" (15-21 mm) reducer
 2 automatic couplings (one with aquastop)
- spray nozzle.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8845	1	35 x 34 x 8	35 x 34 x 8	0,010	1,70	60	8 000625 088454

5/8" (15 mm) SILVER ELEGANT PLUS HOSE KIT 15 m

708856



- Hose kit complete with:
 15 m of 5/8" (15 mm) Silver Elegant Plus hose
 3/4" (20-27 mm) multithread tap connector and 1/2" (15-21 mm) reducer
 2 automatic couplings (one with aquastop)
 spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8856		1	37,5 x 38 x 10	37,5 x 38 x 10	0,014	2,05	60	8 000625 088560



AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 10 709120




AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 15 709003



AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 25 709004











AQUAVIVA PLUS Ø 5/8" (15 mm) m 15 709005



AQUAVIVA PLUS Ø 5/8" (15 mm) m 25 709006



code 9005	packaging qty 1	pack size (cm) Ø 38 x 9	box size (cm) Ø 38 x 9	volume (m³) 0,013	weight (kg) 1,80	pcs/pallet 78	8 000625 090051
9006	1	Ø 38 x 11	Ø 38 x 11	0,016	3,00	60	8 000625 090068





AQUAVIVA PLUS Ø 3/4" (19 mm) m 25 709008



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9008	1	Ø 38 x 16	Ø 38 x 16	0,023	4,75	36	8 000625 090082





FLEXYFORT GREEN: THANKS TO ITS SPECIAL KINK-RESISTANT KNIT, IT DOES NOT TWIST EVEN AT HIGH PRESSURE.



TOP-BLACK: ALGAE- AND UV-RESISTANT, WITH A SPECIAL BRAIDED REINFORCEMENT.

BRAIDED AND KNITTED HOSES																	
ITEM	9037	9064	9036		9065	9043	9045	9048	9046	9060	9061	9062	9063	9131	9141	9133	
DIAMETER (")	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"	1″	1/2"	1/2"	5/8"	3/4"	1/2"	1/2"	1/2"	
DIAMETER (mm)	12,5 mm	12,5 mm	12,5 mm	15 mm	15 mm	15 mm	19 mm	19 mm	25 mm	12,5 mm	12,5 mm	15 mm	19 mm	12,5 mm	12,5 mm	12,5 mm	
LENGTH (m)	15	25	50	15	25	50	50	25	50	25	50	25	25	15	25	50	
PRODUCT LINE				TC	P - BLA	CK				SI	LVER GF	REEN PL	US				
QUALITY				\$₹	→	☆ €	3			1	7 🏠 9		· 🏠				
WARRANTY					25 years						30 y	ears					
ТҮРЕ					Knitted						Kni	tted					
HOSE CROSS-SECTION IMAGE No. layers					G172(12.6 mm) watere Cliff (MAC in Thall' All Cliff in Thall' All							mmi weegsa 2C-epppye >>>>> Modentall >>>>					
MATERIAL				PVC	: + Polye	ster					PVC + F	olyester					
MAX PRESSURE	12	12	12	12	12	12	8	8	8	12	12	12	12	8	8	8	
BURSTING PRESSURE	36	36	36	36	36	36	25	25	25	48	48	39	36	24	24	24	
TEMPERATURE °C				-	10°/+6	0°					- 15° /	+ 60°					
NO PHTHALATES					√						`	/					
ALGAE-RESISTANT		✓						/									
KINK-RESISTANT		✓						\	/								
FLEXIBLE		✓							\	/							
NON-TOXIC					√						\	/					

9142 9145 9136 9149 9138 9150 9140	9123 9124 9125 9126 9127 9128	9129 912	1	9004	9005	9006	9008
5/8" 5/8" 5/8" 3/4" 3/4" 1" 1" 15 15 15 19 19 25 25	1/2" 1/2" 5/8" 5/8" 5/8" 3/4" 12,5 12,5 15 15 15 19	3/4" 1/2 19 12,		1/2"	5/8"	5/8" 15	3/4" 19
mm mm mm mm mm mm	mm mm mm mm mm	mm mn	n mm	mm	mm	mm	mm
15 25 50 25 50 25 50	15 25 15 25 50 25	50 10		25	15	25	25
FLEXYFORT GREEN	SILVER ELEGANT PLUS			AQUAVI			
☆☆☆☆☆				$\frac{1}{2}$	3 😭		
25 years	20 years			10 ye	ears		
Knitted	Knitted			Knit	ted		
man and a construction of the construction of	S C C DE LEAGURAIN CONTRACTOR AND MOSE OFFICE AND SECURITY AND SECURIT			Generations and State 3333 Medicinities 3333			
3 PVC + Polyester	4 PVC + Polyester			5 PVC + Pc			
8 8 8 7 7 5 5	10 10 10 10 10 8	8 8	8	8	8	8	7
24 24 24 21 21 16 16	30 30 30 30 30 24	24 24		24	24	24	21
-10°/+60°	-10°/+60°	2. 27		-10°/		£ f	
√	√ × × × × × × × × × × × × × × × × × × ×						
√	√						
√	•			•			
√	√		√				
✓	√ ·						
•			✓				

SPRINGY®

Claber is expanding its range to include a new extendable hose, offering the very best in performance. As well as being ideal for above-ground irrigation, it can also be used for cleaning and other outdoor tasks. All you need to do is connect Springy to the tap and turn on the water. The hose will start to expand, thanks to the special material it is made from. To extend the hose to its maximum length, simply pull it gently. Once you have finished using the hose, it shrinks back up by itself. This means you can store it away easily, as it requires less space.



MULTIPURPOSE 6-JET SPRAY NOZZLE





SPRINGY

Ultra-practical, without taking up much space

ULTRA-STRONG ALVEOLAR STRUCTURE

DRIP-PROOF QUICK CONNECTORS





3x extendable IIIII





SPRINGY 15 m





Compact, extendable hose in a ready-to-use kit. As water flows through the hose, it extends to up to 3 times its length (max. length 15 m). After use, the hose shrinks automatically so it can be stored away, taking up minimum space. Non-toxic, high quality materials. The kit comes complete with a 3/4" tap connector, automatic couplings and a multifunction spray nozzle with 6 different jets (+ 2 OFF). Ideal working pressure: 5 bar.

code pack q.ty (cm) dim. pack (cm) dim. box (m³) volume weight (kg) pcs/pallet 9334 6 22,2 x 9,6 x 19 60 x 20 x 24 0,030 5,44 192 8 000625 093342

SPRINGY 25 m





Compact, extendable hose in a ready-to-use kit. As water flows through the hose, it extends to up to 3 times its length (max. length 25 m). After use, the hose shrinks automatically so it can be stored away, taking up minimum space. Non-toxic, high quality materials. The kit comes complete with a 3/4" tap connector, automatic couplings and a multifunction

spray nozzle with 6 different jets (+ 2 OFF). Ideal working pressure: 5 bar.

code	pack	q.ty	(cm) dim. pack	(cm) dim. box	(m³) volume	weight (kg)	pcs/pallet	
9335	\bigcirc	4	25,5 x 9,6 x 22	40 x 24 x 28	0,030	5,21	120	8 000625 093359

TOP-LIGHT HOSES

Top-Light is Claber's new incredibly light garden hose.

Thanks to the innovative material it is made of, Top-Light does not bend or become blocked, therefore ensuring the constant and continuous passage of water in any situation. Top-Light is non-toxic, free from phthalates, BPA and heavy metals, and is 100% recyclable. The first garden hose of its type.



TOP-LIGHT Ø 1/2" 10 m 709340





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 12,5 mm, external 17,4 mm. Supplied with two automatic couplings, included in the pack.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9340	1	24 x 24 x 11	24 x 24 x 11	0,006	0,78	150	8 000625 093403

TOP-LIGHT Ø 1/2" 15 m 709341





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 12,5 mm, external 17,4 mm. Supplied with two automatic couplings, included in the pack.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9341	1	24 x 24 x 14	24 x 24 x 14	0,008	1,30	108	8 000625 093410

TOP-LIGHT Ø 1/2" 25 m 709342





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 12,5 mm, external 17,4 mm. Supplied with two automatic couplings, included in the pack.

2	
S	

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9342	1	24 x 24 x 21	24 x 24 x 21	0,012	1,80	75	8 000625 093427

TOP-LIGHT Ø 3/4" 15 m 709357



NEW FOR 2023

NEW FOR 2023





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 18 mm, external 23 mm. Compatible with standard 3/4" (19 mm) couplings and Ergogrip Universal couplings.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9357	1	27 x 27 x 19	27 x 27 x 19	0,013	1,70	60	8 000625 093571

TOP-LIGHT Ø 3/4" 25 m





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 18 mm, external 23 mm. Compatible with standard 3/4" (19 mm) couplings and Ergogrip Universal couplings.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9358	1	27 x 27 x 25	27 x 27 x 25	0,018	2,78	48	8 000625 093588

SPIRAL KIT

Spiral hose, tap connector and multifunction head or spray nozzle with adjustable jet: all in one package! Keep it close to hand whether in your garden, out on the terrace, at your holiday home, in your campervan or on your boat.

All Spiral Kit components have been designed to work perfectly and last.

The hose undergoes a special treatment during production, meaning it always returns to its compact spiral shape, making it easy to store away tidily in its wall bracket.



SPIRAL KIT BASIC 10 m

709034







Spiral hose ideal for use on balconies, terraces, small gardens, boats and camp sites. Thanks to the quality of the materials and the spiral memory, the hose will always regain its original shape following use.

The kit comprises: 10 metres spiral hose, 3/4" (20-27 mm) threaded tap connector, automatic coupling, automatic coupling with Aquastop, spray nozzle, wall bracket with screws and plugs.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9034		10,5 x 59 x 10,5	39 x 59 x 26	0,060	6,20	72	8 000625 090341

SPIRAL KIT PLUS 15 m







Spiral hose ideal for use on balconies, terraces, small gardens, boats and camp sites. Thanks to the quality of the materials and the spiral memory, the hose will always regain its original shape following use.

The kit comprises 15 metres spiral hose, 3/4" (20-27 mm) threaded tap connector, automatic coupling, automatic coupling with Aquastop, multifunction spray lance with 4 different jets (shower, concentrated, aerated, mist + 1 position OFF), wall bracket with screws and plugs.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9338	3	23 x 53 x 11,5	39 x 59 x 26	0,060	4,60	36	8 000625 093380

STARTER GARDEN-SET

709053







- 20 mt 9-13 mm hose
- 3/4" (20-27 mm) tap connector and 1/2" (15-21 mm) adaptor
- 1 pc 9-13 mm automatic coupling
- 1 pc 9-13 mm automatic coupling w/stop
- 1 pc multifunction pistol.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9053	1	35 x 35 x 8,5	35 x 35 x 8,5	0,010	2,16	64	8 000625 090532

9-13 mm COUPLING

709025







Automatic coupling for Ø 9-13 mm hose. Compatible with:

- Spiral Kit (9034) and Spiral Kit Plus (9338)
- Mini-set Balcony (9031), Garden (9032) and Utility (9028)
- Starter Garden-Set (9053).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9025	<u> </u>	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,50	1440	8 000625 090259









Automatic coupling with Aquastop for Ø 9-13 mm hose. Compatible with:

- Spiral Kit (9034) and Spiral Kit Plus (9338) Mini-Set Balcony (9031), Garden (9032) and Utility (9028) Starter Garden-Set (9053).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9026	10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,60	1440	8 000625 090266







CAREFREE IRRIGATION

As the technological core of Claber systems, the easy-to-use and reliable timers allow you to manage your system according to an accurate, well-calibrated irrigation schedule. From the simplest models with preset programmes, to those with customisable features, there is the perfect timer model for everybody.



DROP BY DROP

Claber drippers provide constant, accurate and gentle watering. The drops are distributed near the roots of each plant, keeping them happy and healthy, without wasting water.



SPRING RAIN

RainJet micro-sprinklers can be used to distribute a water spray or delicate jet over a specific area with a great level of accuracy.



THERE FOR YOU, EVEN WHEN YOU'RE NOT

Aqualux System is the solution for watering your house plants while you are away for short or long periods.

This discrete, efficient drip irrigation system lets you travel carefree.



AQUAUNO® TIMERS

Efficient and versatile, Aquauno timers provide the simplest solution to manage watering requirements at the best time and with just the right amount of water. Suitable for your patio, garden or vegetable patch, they are connected directly to the tap and are battery operated, hence no plumbing or electrical connections are needed. The protective cover, perfectly sealed electronic circuits and certified quality quarantee the utmost reliability.

Thanks to their compact size, they can also be installed in narrow spaces.



AQUAUNO PRATICO

708425







It's easy to use. Simply press the green button to start the program, then the red button when watering is sufficient.

Pratico memorises the time that has elapsed between the two operations and repeats the program (maximum duration 60 minutes) at the same time every day.

A led indicates all programming phases and can display the times you have set at any moment. You can also set the watering times with a simple pulse code using the same two buttons and

The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector. It runs off a single 9 V alkaline battery which lasts the entire season.

The electronic components are perfectly sealed. Operating water pressure from 0,5 to 10 bar.

100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8425	\bigcirc	2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,09	280	8 000625 084258

AQUAUNO LOGICA

708422







An automatic one-line water timer containing 15 preset cycles, selected using an exclusive control rotary knob.

Simply by turning the knob to any one of the 15 numbered notches you can set the program required in a matter of seconds.

All the programs available are summarized in a diagram printed on the cover.

The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector.

One 9 V alkaline battery can power the unit for an entire season.

The electronic components are perfectly sealed.

With an operating pressure range of 0,5 to 10 bar, Aguauno Logica is 100% quality controlled and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8422	<u> </u>	7 x 14.8 x 20.5	19 x 16.5 x 16	0.005	1.00	280	8 000625 084227

AQUAUNO SELECT

708423







One-way automatic timer. 63 preset programmes (+ off and 5-minute test). Easy programming by way of 2 knobs: one with 7 frequencies, the other with 9 watering times; simply turn the knobs for the required setting.

Equipped with washable filter. 3/4" (20-27 mm) tap connector.

Powered by a 9V alkaline battery, which will last an entire season. Electronic components are perfectly sealed.

Operating pressure from 0,5 to 10 bar.

100% checked and tested.



watering cycles a day.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8423		7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,10	280	8 000625 084234

AQUAUNO VIDEO-2

708428





Using this automatic one-lin	e water timer you can set 2
Featuring just three buttons	for easy programming, the

large display clearly communicates to the user all the information required by means of easy-to-understand symbols and numbers. 2 Water cycle times vary from 1 min to 23 hours and 59 min.

Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required.

The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector. One 9 V alkaline battery can power the unit for an entire season (complete with digital battery

status indicator).

The electronic components are perfectly sealed.

With an operating pressure range of 0,5 to 10 bar, Aquauno Video-2 is 100% quality controlled and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8428	\bigcirc	2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,03	280	8 000625 084289

AQUAUNO MIST

708496





Automatic one-way timer, ideal for cyclical automation of both Happy Fresh cooling systems and watering systems on the terrace and in the garden.

Easy programming with 2 rotary knobs: one to set the frequency and the other to select the

27 programs can be selected for drip systems (yellow sector, run time from 2 to 90 mins every 12, 24 or 48 hours), 24 possible combinations for Happy Fresh systems (blue quadrant, run time from 5 to 45 seconds, every 1, 3, 5, 10 mins).

Option of 5 min function test.

Equipped with washable filter. Works with 9 V alkaline battery.

Electronic part perfectly sealed.

Operating pressure from 0.5 to 10 bars. 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8496	2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,10	280	8 000625 084968

AQUAUNO LOGICA PLUS

708419







An automatic one-line water timer containing 15 preset cycles, selected using an exclusive control rotary knob.

Simply by turning the knob to any one of the 15 numbered notches you can set the program required in a matter of seconds.

All the programs available are summarized in a diagram printed on the cover.

A led lights up when the timer is in operation.

The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector..

One 9 V alkaline battery can power the unit for an entire season.

The electronic components are perfectly sealed.

With an operating pressure range of 0,5 to 10 bar, Aquauno Logica Plus is 100% quality controlled and tested.

Designed for direct connection to the Rain Sensor (90915).

Bar	0,5	1	2	2,5	3	4	5
l/min	17	22	31	34	37	38	46

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8419	2	8,2 x 12,8 x 23,5	27 x 25 x 9,5	0,006	1,27	192	8 000625 084197

AQUAUNO VIDEO-2 PLUS

708412







Using this automatic one-line water timer you can set 2 watering cycles a day.

Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to understand symbols and numbers. 2 Water cycle times vary from 1 min to 23 hours and 59 min.

Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required.

The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector. One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator) the electronic components are perfectly sealed.

With an operating pressure range of 0,5 to 10 bar, Aquauno Video-2 Plus is 100% quality controlled and tested.

Designed for direct connection to the Rain Sensor (90915).

Bar	0,5	1	2	2,5	3	4	5
l/min	17	22	31	34	37	38	46

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8412	<u> </u>	8,2 x 12,8 x 23,5	27 x 25 x 9,5	0,006	1,34	192	8 000625 084128

AQUAUNO VIDEO-6 PLUS

708413







8

Using this automatic one-line water timer you can set 6 watering cycles a day.

Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to understand symbols and numbers. 6 Water cycle times vary from 1 min to 23 hours and 59 min.

Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer reauired.

The unit is fitted with a washable stainless steel filter. 3/4'' (20-27 mm) tap connector. One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator) the electronic components are perfectly sealed.

With an operating pressure range of 0,5 to 10 bar, Aquauno Video-6 Plus is 100% quality controlled and tested.

Designed for direct connection to the Rain Sensor (90915).

Bar	0,5	1	2	2,5	3	4	5
l/min	17	22	31	34	37	38	46

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
8413		8,2 x 12,8 x 23,5	27 x 25 x 9,5	0,006	1,32	192	8 000625 084135

AQUADUE DUPLO EVOLUTION







Automatic two-way water timer.

Provides up to three irrigations a day for each line.

Featuring just three buttons for easy programming, the large display clearly communicates to

the user all the information required by means of easy-to-understand symbols and numbers. Water cycle times vary from 1 min to 23 hours and 59 min.

Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required. The unit is fitted with a stainless steel filter. 3/4" (20-27 mm) tap connector.

Manual control function, selectable duration 15-60 min. Setting of current day.

One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator). The electronic components are perfectly sealed. Designed for direct connection to the Rain Sensor (90915).

With an operating pressure range of 0,5 to 10 bar, Aquadue Duplo is 100% quality controlled and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8410	2	10 x 12,7 x 24	28 x 25 x 13	0,008	1,80	144	8 000625 084104

RAIN SENSOR





Suitable for all watering systems, the rain sensor avoids unnecessary wastage of water by turning the sprinklers off when it is raining.
When the internal flow reaches a level of 5 mm of rain per square metre, the system shuts

Programmed watering automatically resumes when the water in the sensor evaporates. The rain sensor should be installed in an outdoor area exposed to rain using the stainless steel bracket provided.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90915	<u> </u>	8,5 x 11 x 20,5	25 x 19 x 10	0,005	0,64	288	8 000625 909155

SPARE 3/4" (20-27 mm) F CONNECTOR

7091006





Replacement tap connector for Aquauno and Aquadue water timers.

- 3/4" (20-27 mm) female tap connector
- washable filter
- ring nut
- o.ring.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91006	 10	7.9 x 15.7 x 3.0	25 x 19 x 10	0.005	0.55	1440	8 000625 910069





TEMPO TIMERS AND DUAL

A backlit LCD display, better protection against weather, immediate or delayed start and connection to the Rain Sensor (with or without wires) are just some of the strengths of this innovative family of digital timers. Tempo and Dual featuring 1 or 2 irrigation lines meet every requirement, thanks to the wide range of programming options in the Select range and the choice of preset solutions in the Logic range. The Tempo Hybrid timer completes the range and is equipped with a photovoltaic panel that makes use of the inexhaustible supply of clean solar energy.



TEMPO HYBRID







One-way automatic timer. Equipped with a built-in photovoltaic panel, this timer is powered by solar energy even without the panel being exposed directly to sunlight. Watering times from 5 seconds to 1 minute and 1 minute to 90 minutes. Up to 4 watering cycles per day. Backlit LCD screen ensuring high visibility under all conditions. Manual on/off button (variable 15-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. 1.5V AA alkaline battery guarantees continued operation in the event of prolonged light deficiency. Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to RF Rain Sensor (90831) by way of optional interface (8480). 100% checked and tested.

Bar

0,5

0,5

12

17 23

I/min

	l/min	12	17	23	25	27	30	33	
n³)	weight (kg)	pcs/pa	llet					
	1,40		160		8 00	0625		 876	

2 2,5

25

27 30 33

2,5

TEMPO LOGIC

708483





code

8487

packaging qty

pack size (cm)

9 x 12 x 23

box size (cm)

38 x 17 x 13

One-way automatic water timer. Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket. Éasy programming with a single digital button. 19 preset programmes (+ off), listed on the front cover. Backlit LCD screen displaying the different functions. Start button allowing immediate or delayed (up to 23 hours) start. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter.

Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to

volume (n 0,008

wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8483	\bigcirc	2	9 x 12 x 23	25 x 19 x 10	0,005	1,40	252	8 000625 084838

TEMPO SELECT







One-way automatic water timer. Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket. Easy programming with two digital buttons, one selecting 14 watering times, the other 7 frequencies for each line. 98 preset programmes (+ off). Backlit LCD screen displaying the different functions. Start button allowing immediate or delayed (up to 23 hours) start. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. Operating pressure 0,5 - 10 bar.

Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with

intional interface (8180) 100% checked and tested						`		
ptional interface (8480). 100% checked and tested.	Bar	0,5	1	2	2,5	3	4	5
	l/min	12	17	23	25	27	30	33

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8486	2	9 x 12 x 23	25 x 19 x 10	0,005	1,40	252	8 000625 084869

DUAL LOGIC

708485





Two-way automatic water timer, with watering on two independent lines. Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket. Easy programming with a single digital button. 19 preset programmes (+ off) for each line, listed on the front cover. Backlit LCD screen displaying the different functions. Start button allowing immediate or delayed (up to 23 hours) start, on both lines. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. Operating pressure 0,5 - 10 bar.

Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with

Bar	0,5	1	2	2,5	3	4	5
l/min	16	20	28	30	32	38	42

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8485	2	16 x 12 x 23	38 x 17 x 13	0,008	2,00	160	8 000625 084852

optional interface (8480). 100% checked and tested.

DUAL SELECT

708488





Two-way automatic water timer, with watering on two independent lines. Powered by $2 \times 1.5 \text{ V}$ AA alkaline batteries, fitted in a rainproof socket. Easy programming with two digital buttons: one selecting 14 watering times, the other 7 frequencies for each line. 98 preset programmes (+ off) for each line. Backlit LCD screen showing the different functions.

Start button allowing immediate or delayed (up to 23 hours) start on both lines. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	16	20	28	30	32	38	42

8 000625 084807

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8488	2	16 x 12 x 23	38 x 17 x 13	0,008	2,00	160	8 000625 084883

RAIN SENSOR RF

7090831





Rain sensor operating on radio frequency. Suspends watering in case of rainfall. Dialogues with Tempo and Dual timers, the radio frequency system and Hydro-4. The RF Rain Sensor is designed for open air installation, exposed to rainfall, using a special stainless steel bracket supplied with the product.

No electrical connections are required:

RF coverage up to 30 m. Powered by 2 x 1.5 V AA alkaline batteries.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90831	□ 1	8,5 x 11 x 20,5	8,5 x 11 x 20,5	0,002	0,26	288	8 000625 908318

RF RAIN SENSOR INTERFACE

708480






Connection interface for RF Rain Sensor (90831), used with Dual and Tempo water timers. In case of rainfall, watering is suspended by radio control, without any use of electrical connections. RF coverage up to 30 m.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8480		2	8 x 15 x 15	13 x 19 x 10	0.001	0.08	648

TIMERS		AQUAUNO					
CODE	8422	8423	8425	8428	8496	8419	
DESCRIPTION	AQUAUNO LOGICA	AQUAUNO SELECT	AQUAUNO Pratico	AQUAUNO VIDEO-2	AQUAUNO MIST	AQUAUNO LOGICA PLUS	
Power supply	1 x 9V 9V ALKALINE	1 x 9V 9V ALKALINE	1 x 9V 9V ALKALINE	1 x 9V 9V ALKALINE	1 x 9V 9V ALKALINE	1 x 9V 9V ALKALINE	
nlet thread	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	
Outlet thread	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	
No. of ways	1	1	1	1	1	1	
Display	NO	NO	NO	YES	NO	NO	
Backlighting	NO	NO	NO	NO	NO	NO	
Min./max. pressure	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	
Operating temperature	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	
Controls	Rotary knob	2 rotary knobs	2 buttons	3 buttons	2 rotary knobs	Rotary knob	
No. of programmes	15, preset	63 settable programmes (combining times and frequencies)	1	2	51 settable programmes (combining times and frequencies)	15, preset	
rrigation duration	1 - 60 mins	1 - 60 mins	1 - 60 mins	1min - 23 h 59 mins	2-90 min (watering) 5-45 sec (cooling)	1 - 60 mins	
Watering frequency	from 2 per day to 1 per week	from 3 per day to 1 per week	1 per day	up to 2 per day	12-24-48 h (watering) 1-3-5-10 min (cooling)	from 2 per day to 1 per week	
Weekly programming	NO	NO	NO	YES	NO	NO	
Manual mode	NO	YES	NO	YES	SI	NO	
Duration of manual irrigation	NO	15 mins (early stop possible)	NO	15 mins (early stop possible)	5 mins (early stop possible)	NO	
Delayed start	NO	NO	NO	You set the start time	NO	NO	
Watering in progress indicator	NO	LED	NO	YES	LED	LED	
Power supply disconnected	NO	NO	LED	YES (set programme number flashes)	NO	NO (flashes once every 2 secs to indicate watering under way or waiting to start)	
Rain Sensor connection	NO	NO	NO	NO	NO	YES, with wired rain sensor (90915)	
	2 years	2 years	2 years	2 years	2 anni	2 years	

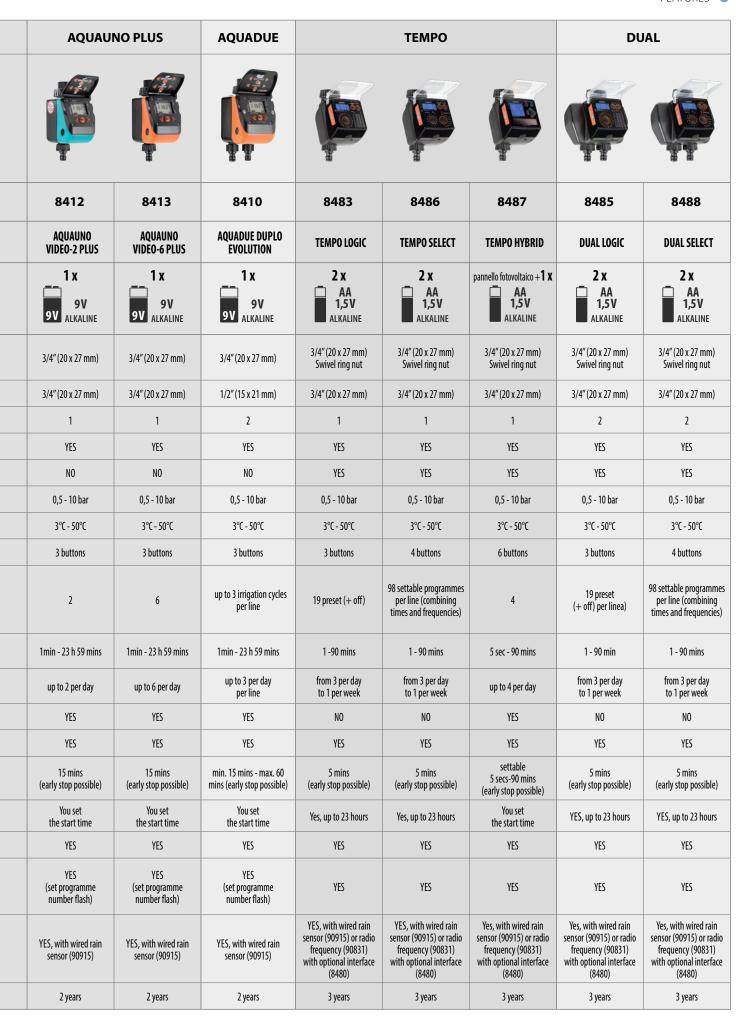

FEEDING, MAIN AND DRIPPER TUBES

Sturdy, algae- and UV-resistant: with Claber's main and feeding hoses, you can easily create any drip irrigation or micro-irrigation system. To help you water hedges, borders and flowerbeds easily and uniformly, Claber offers dripper and soaker hoses.

Simply connect up the hose to the tap and start saving time and precious water right away! Alternatively, why not use them with a Claber battery-operated timer to water your plants at the ideal time with just the right amount of water?



FEEDING TUBE 5 m

7090371





1/4" (4 - 6 mm) tube for branching off the main tube. Supplies the in-line and end-of-line drippers. Flexible and resistant to algae formation, low temperatures and solar radiation.



code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet
90371 14 14 x 3,2 x 14 28 x 25 x 19 0,013 1,36 672 8 000625 9037 19

FEEDING TUBE 20 m

7090370





1/4" (4 - 6 mm) tube for branching off the main tube. Supplies the in-line and end-of-line drippers. Flexible and resistant to algae formation, low temperatures and solar radiation.



code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet 90370 5 18 x 5,5 x 18 28 x 25 x 19 0,013 1,81 240 8 000625 903702 903702

FEEDING TUBE 20 m GREEN 7090375





1/4" (4 - 6 mm) tube for branching off the main tube. Supplies the in-line and end-of-line drippers. Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90375	<u></u> 5	18 x 5,5 x 18	28 x 25 x 19	0,013	1,81	240	8 000625 903757

MAIN TUBE 15 m

7090362





1/2" (13 - 16 mm) polyethylene tube for the main line. Flexible and resistant to algae formation, low temperatures and solar radiation.



 code
 packaging
 qty
 pack size (cm)
 box size (cm)
 volume (m³)
 weight (kg)
 pcs/pallet

 90362
 1
 Ø 40 x 8
 Ø 40 x 8
 0,010
 1,00
 72
 8 000625 903627

MAIN TUBE 25 m

7090365





1/2" (13 - 16 mm) polyethylene tube for the main line. Flexible and resistant to algae formation, low temperatures and solar radiation.



code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet 90365 1 0 42 x 10 0,014 1,65 60 8 000625 903658

MAIN TUBE 25 m WHITE 7090368





1/2" (13 - 16 mm) polyethylene tube for the main line. Flexible and resistant to algae formation, low temperatures and solar radiation.



 code
 packaging
 qty
 pack size (cm)
 box size (cm)
 volume (m³)
 weight (kg)
 pcs/pallet

 90368
 1
 Ø 42 x 10
 Ø 42 x 10
 0,014
 1,65
 60
 8 000625 903689

MAIN TUBE 50 m

7090366





1/2" (13 - 16 mm) polyethylene tube for the main line. Flexible and resistant to algae formation, low temperatures and solar radiation.



 code
 packaging
 qty
 pack size (cm)
 box size (cm)
 volume (m³)
 weight (kg)
 pcs/pallet

 90366
 1
 Ø 44 x 15
 Ø 44 x 15
 0,023
 3,07
 28
 8 000625 903665



1/4" DRIPPER TUBE 15 m 7090353





1/4" (4-6 mm) polyethylene tube. Fitted with internal 1,2 l/h labyrinth drippers at 30 cm intervals which ensure even irrigation over the entire cultivated area.

Reduced water consumption: operating 0,5 - 1 bar.

n3)	weight (kg)	ncc/nallet		

0,5

2,4

1,0

2,8

1,5

3,2

2,0

3,5

Bar

L/H





code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90353		5	22 x 5 x 22	23 x 25 x 26	0,015	1,49	225	8 000625 903535

DRIPPER TUBE 25 m 7090355





1/2" (13-16 mm) polyethylene tube. Fitted with internal 2 l/h labyrinth drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.

Reduced water consumption: operating 0,5 - 2 bar.

	Bar	0,5	1,0	1,5	2,0
)	L/H	1,8	2,3	2,7	3,1





code

90355



pack size (cm) Ø 50 x 9,5

box size (cm) Ø 50 x 9,5

volume (m3) 0,023

weight (kg) pcs/pallet 1,61 32

8 000625 903559

DRIPPER TUBE 25 m BROWN 7090356





1/2" (13-16 mm) polyethylene tube. Fitted with internal 2 l/h labyrinth drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.

Reduced water consumption: operating 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
L/H	1,8	2,3	2,7	3,1









pack size (cm) Ø 50 x 9,5

box size (cm) Ø 50 x 9,5

volume (m3) 0,023

weight (kg) pcs/pallet 32 1,60

8 000625 903566

DRIPPER TUBE 50 m 7090357





1/2" (13-16 mm) polyethylene tube.

Fitted with internal 2 I/h labyrinth drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.

Reduced water consumption: operating 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0	
L/H	1,8	2,3	2,7	3,1	





packaging qty

pack size (cm) Ø 60 x 12

box size (cm) Ø 60 x 12

volume (m3) 0,033

weight (kg) pcs/pallet

12

8 000625 903573

2,1 L/H SELF-REGULATING DRIPPER TUBE 25 m 7090354





1/2" (13-16 mm) polyethylene tube. Fitted with internal labyrinth of 2,1 l/h self-regulating drippers at 33 cm intervals

Bar	0,5	1,0	1,5	2,0	2,5
L/H	2,1	2,1	2,1	2,1	2,1

which ensure even irrigation over the entire cultivated area. Reduced water consumption: operating 0,5 - 4 bar.



code	
90354	



J	qıy	
	1	

pack size (cm) Ø 50 x 9,5

box size (cm) Ø 50 x 9,5

0,023

volume (m³)

weight (kg) pcs/pallet 32 1,61

8 000625 903542

CLABER DRIPPER HOSES HAVE SMALL DRIPPERS POSITIONED AT REGULAR INTERVALS.



1/2" SOAKER HOSE 15 m 7090350







Slowly diffuses the water through its capillary walls. Strong but flexible, designed to be laid around plants or with covering of soil.
Continuous drainage even in freezing conditions.
Suitable for low flow rates: operating pressure 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
I /Hxm	14	22	28	32

code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet
90350 1 0 35 x 11 0 35 x 11 0,010 1,52 54 8 000625 903504

1/2" SOAKER HOSE 25 m 7090351








Slowly diffuses the water through its capillary walls. Strong but flexible, designed to be laid around plants or with covering of soil.
Continuous drainage even in freezing conditions. Suitable for low flow rates: operating pressure 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0	
L/Hxm	9	14	18	22	

 code
 packaging
 qty
 pack size (cm)
 box size (cm)
 volume (m³)
 weight (kg)
 pcs/pallet

 90351
 1
 Ø 38 x 13
 Ø 38 x 13
 0,015
 2,08
 42
 8 000625 903511

SOAKER HOSES ARE IDEAL FOR WATERING YOUR VEGETABLE PATCH EVENLY.

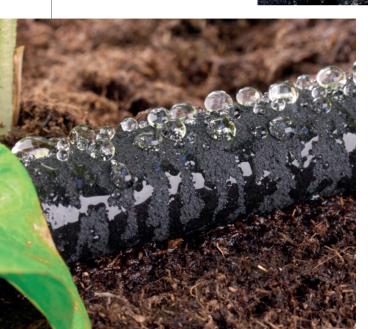




TRIPLE-SOAKER HOSES

For a practical and versatile irrigation experience, Claber presents Triply, a range of triple-soaker hoses equipped with regular micro-punctures and a double-sided core. Thanks to its triple line, the triple-soaker hose releases countless jets of water and can be used to spread a gentle, calibrated rain (with the holes facing up), or to ensure the right humidity of the earth (with the holes facing down). The Quick-Click socket ensures fast installation, making it the ideal partner for watering borders, flowerbeds and small vegetable patches

or gardens.



for watering borders, flowerbeds and small vegetable patches.





TRIPLY 7,5 m

7090376







Triple-soaker hose with regular micro-punctures on one side. Laid out with the holes facing up, it releases countless jets. With the holes facing down it waters the ground by saturation. Equipped with a Quick-Click socket to connect to the water outlet. Operating pressure from 1 to 3 bar. Water flow rate: from 3 l/min to 8 l/min.

90376

31 x 4 x 29

pack size (cm)

box size (cm) 40 x 13 x 40

volume (m3) 0,02

weight (kg) pcs/pallet 2,43

8 000625 903764 108

TRIPLY 15 m

7090377





Triple-soaker hose with regular micro-punctures on one side. Laid out with the holes facing up, it releases countless jets. With the holes facing down it waters the ground by saturation. Equipped with a Quick-Click socket to connect to the water outlet. Operating pressure from 1 to 3 bar. Water flow rate: from 5 l/min to 13 l/min.

code 90377 packaging qty

pack size (cm) 38 x 4 x 38

box size (cm) 40 x 13 x 40 volume (m3) 0,02

weight (kg) pcs/pallet 108 4,20

8 000625 903771

BLOCK-SYSTEM RAINJET®

BLOCK-SYSTEM CONNECTORS AND COUPLINGS: RAINJET EVOLUTION

A complete family of compression connectors and couplings for 1/2" hoses, bringing innovative features to the extensive range of RainJet drippers and accessories.

The special locking system with the characteristic Block-System ring nut has been designed to guarantee a perfect seal that lasts, with no water leakage and no risk of impurities entering the system. It helps to make any DIY system, like Colibrì micro-irrigation, even easier to set up.

PRESSURE REDUCER

7091040





Automatically reduces and maintains inlet water pressure at a constant pressure of 1 bar (max. 10 bar).

Connects to 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

25 meets to 5, 1 (25 27 mm) 61 1, 2 (15 21 mm) times.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91040		10,2 x 20,6 x 4	25 x 19 x 10	0,005	0,40	576	8 000625 910403

DOUBLE TAP CONNECTOR

7091045





With double independent adjustment for connection of two lines to a single water tap. Screwed onto taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91045	8	10,2 x 20,6 x 5,3	28 x 25 x 13	0,009	0,95	576	8 000625 910458

3/4" (20-27 mm) MALE THREADED TWO-WAY ADAPTER

7091589





With double independent adjustment. For taps with 3/4" (20-27 mm) thread; enables assembly of two electronic timers, pressure reducers, etc.

code	packaging qt	ity p	oack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91589	<u></u> 5	1	5,4 x 24 x 5,5	28 x 25 x 19	0,013	1,32	240	8 000625 915897

MULTI-THREAD TAP CONNECTOR 3/4" (20-27 mm) - 1/2" (15-21 mm)

7091002



To connect automatic "Quick-Click" tap fittings; female 3/4" (20-27 mm) thread and 1/2" (15-21 mm) adaptor.



3/4" (20-27 mm) AUTOMATIC ADAPTOR 7091494







Used to connect the pressure reducer, 1/2" (13-16 mm) main hose adaptor, 1/4" (4-6 mm) threaded hose adaptor, and other accessories with 3/4" (20-27 mm) female thread to electronic timers.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91494		7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,39	1440	8 000625 914944

AUTOMATIC COUPLING

7099009

7091009





To connect 1/2" (13-16 mm) main tube to an outlet with automatic tap fitting.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99009		25	3,5 x 7 x 3,5	10 x 39 x 13	0,005	0,86	3200	8 000625 990092
91009		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,55	1440	8 000625 910090

IN-LINE FILTER FOR 1/2" (13-16 mm) HOSE

7091011







For water filtering in dripper or microirrigation systems. Installed in-line, directly on the 1/2" (13-16 mm) main hose. Easy-to-clean mesh filter.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91011	4	10,2 x 20,6 x 3,4	25 x 19 x 10	0,005	0,35	576	8 000625 910113

1/2" (13-16 mm) HOSE THREADED ADAPTOR 7099013



7091013







For direct connection of 1/2"(13-16 mm) tubes to taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99013		25	3,5 x 5,5 x 3,5	10 x 39 x 13	0,005	0,74	3200	8 000625 990139
91013	\sim	14	7,9 x 15,7 x 4	25 x 19 x 10	0,005	0,55	2016	8 000625 910137

1/2" (13-16 mm) HOSE 3/4" (20-27 mm) 1" (26-34 mm) THREADED COUPLING

7099015



7091015







To connect 1/2"(13-16 mm) main tube to an outlet with 3/4"(20-27 mm) or 1"(26-34 mm) female thread (e.g. Solenoid valves).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99015		25	4,2 x 5,75 x 4,2	10 x 39 x 13	0,005	0,75	3200	8 000625 990153
91015		10	7.9 x 15.7 x 4.5	25 x 19 x 10	0.005	0.42	1440	8 000625 910151

1/2" (15-21 mm) THREADED 3-WAY CONNECTOR

7099017



7091017





7091019



code

99017

91017

packaging qty

10

25

pack size (cm)

10 x 4,9 x 2,8

10 x 20,6 x 3,4

Used for end line connection of Colibrì underground micro-sprinklers (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.

Used for connecting underground Colibrì micro-sprinklers in series (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.

box size (cm)

10 x 39 x 13

28 x 25 x 13

volume (m³)

0,005

0,009

weight (kg)

0,81

0,61

pcs/pallet

3200

720

8 000625 990177

8 000625 910175

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99019		25	6,3 x 4,8 x 2,8	10 x 39 x 13	0,005	0,60	3200	8 000625 990191
91019		12	7,9 x 15,7 x 3,0	25 x 19 x 10	0,005	0,40	1728	8 000625 910199

1/2" (15-21 mm) THREAD ELBOW CONNECTOR 7099021



7091021





For elbow connection of Colibrì micro-sprinklers (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99021		25	6,55 x 5,65 x 6,55	10 x 39 x 13	0,005	1,05	3200	8 000625 990214
91021		6	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,37	864	8 000625 910212

1/2" (13-16 mm) COUPLING

7099023

7091023





7091025





code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99023		25	3 x 8 x 3	10 x 39 x 13	0,005	0,66	3200	8 000625 990238
91023		12	7,9 x 15,7 x 3,0	25 x 19 x 10	0,005	0,45	1728	8 000625 910236

Enables coupling of two 1/2" (13-16 mm) main tube sections.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99025		25	6,45 x 6,45 x 2,8	10 x 39 x 13	0,005	0,70	3200	8 000625 990252
91025		12	7.9 x 15.7 x 3.0	25 x 19 x 10	0.005	0.47	1728	8 000625 910250

1/2" (13-16 mm) CONNECTOR WITH 4 1/4" (4-6 mm) OUTLETS

7099027



7091027





Useful for allowing up to four drippers inside pots or large flower containers. Ideal for flower-beds or border micro irrigation systems, branching the lines from a single

Plugs supplied for closing any outlets not used.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99027		25	2,8 x 10 x 2,8	10 x 39 x 13	0,005	0,80	3200	8 000625 990276
91027		4	10 x 20,6 x 3,4	25 x 19 x 10	0,005	0,27	576	8 000625 910274

1/2" (13-16 mm) TEE

7099029



7091029





Enables coupling of three 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99029		25	10 x 6,5 x 2,8	10 x 39 x 13	0,005	0,94	3200	8 000625 990290
91029		10	10 x 20,6 x 3,5	28 x 25 x 13	0,009	0,65	720	8 000625 910298

SHUT-OFF VALVE

7099033



7091033





For water flow supply, shut-off and adjustment. For installation between two 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99033		25	10 x 4,6 x 2,8	10 x 39 x 13	0,005	0,92	3200	8 000625 990337
91033	\bigcirc	10	10 x 20,6 x 3,3	28 x 25 x 13	0,009	0,64	720	8 000625 910335

END STOPPER

7099035



7091035







To shut off water flow at the end of 1/2" (13-16 mm) main tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99035		25	2,8 x 4 x 2,8	10 x 39 x 13	0,005	0,46	3200	8 000625 990351
91035		12	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,36	1728	8 000625 910359

THREADED DRAINAGE VALVE

7091037





Used for automatic drainage of the hose circuit. Recommended for zones subject to cold winters. With connector for 1/2" (13-16 mm) hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91037		5	10 x 20,6 x 4	25 x 19 x 10	0,005	0,34	720	8 000625 910373

RAINJET® CONNECTORS AND ACCESSORIES

Couplings, tap connectors, spikes and drainage valve. The RainJet accessories can be used to create any drip or micro-irrigation system stress-free, as well as helping you to make any changes to the system over time, should your needs or plants change.

All couplings and accessories are connected simply using pressure, with no need for any tool.

They are perfectly watertight. Using linear, elbow or tee connectors, you can create any layout you like. The RainJet accessories are ideal for creating any type of drip irrigation system, with a wide range of RainJet drippers to choose from. They can also be used to set an easy underground micro-irrigation circuit with Colibri System. A must-have to meet the needs of a constantly evolving sector!

IN-LINE FILTER FOR 1/2" (13-16 mm) HOSE

7091031





For water filtering in drip or micro irrigation systems. Installed in-line, directly on the 1/2" (13-16 mm) main hose. Easy-to-clean mesh filter.

code 91031 packaging qty

pack size (cm) 10 x 20,6 x 3,4 box size (cm) 25 x 19 x 10 volume (m³) 0,005 weight (kg) pcs/pallet 0,28 720

720 8 000625 910311



RAINJET BLOCK-SYSTEM

With the innovative Block-System compression connectors installation could not be any easier.

RAINJET CONNECTORS AND ACCESSORIES

RainJet couplings and accessories are connected easily using pressure, with no need for any tools, and they are watertight.



8 000625 910823

1/2" (13-16 mm) HOSE THREADED ADAPTOR

7091347





For direct connection of 1/2" (13-16 mm) tubes to taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91347		7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,37	1440	8 000625 913473

1/2" (13-16 mm) - 1/4" (4-6 mm) HOSE THREADED ADAPTOR

7091345





For direct connection of 1/2" (13-16 mm) and 1/4" (4-6 mm) tubes to taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging q	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91345	□ 1	10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,37	1440	8 000625 913459

1/2" (13-16 mm) HOSE 3/4" (20-27 mm) 1" (26-34 mm) THREADED COUPLING

7091066





To connect 1/2" (13-16 mm) main tube to an outlet with 3/4" (20-27 mm) or 1" (26-34 mm) female thread (e.g. Solenoid valves).



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91066	10	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,36	1440	8 000625 910663

1/2" (15 - 21 mm) THREADED 3-WAY CONNECTOR 7091072





Used for connecting underground Colibrì micro-sprinklers in series (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose. Blister of 2 pcs.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91072		10	7,9 x 15,7 x 3,7	25 x 19 x 10	0,005	0,38	1440	8 000625 910724

1/2" (15-21 mm) THREADED ELBOW 7091082





Used for end line connection of Colibrì underground micro-sprinklers (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) to main hose. Blister of 2 pcs.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91082		10	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,32	1440

1/2" (13-16 mm) COUPLING

7099076



7091076





Enables coupling of two 1/2" (13-16 mm) main tube sections. Blister of 4 pcs.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99076		6 x 20	15 x 15 x 3	10 x 39 x 13	0,005	0,81	768	8 000625 990764
91076	\otimes	15	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,53	2160	8 000625 910762

1/2" (13-16 mm) ELBOW COUPLING


7099081




7091081









1/2" (13-16 mm) - 1/4" (4-6 mm) 2 - WAY COUPLING

7091073





Used to branch off 1/4" (4-6 mm) feeding tube sections from 1/2" (13-16 mm) main tube. Blister of 2 pcs.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91073	10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,30	1440	8 000625 910731

1/2" (13-16 mm) TEE

7099071



7091071





Enables coupling of three 1/2" (13-16 mm) main tube sections. Blister of 2 pcs.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99071		4 x 20	14 x 22 x 3	10 x 39 x 13	0,005	0,80	512	8 000625 990719
91071	\bigcirc	15	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,48	2160	8 000625 910717

1/2" (13-16 mm) **END STOPPER** 7091086



To shut off water flow at the end of 1/2" (13-16 mm) main tube. Blister of 4 pcs.



coae
91086









weight (kg) pcs/pallet 0,44 2160



1/2" (13-16 mm) SHUT-OFF VALVE





For water flow supply, shut-off and adjustment. For installation between two 1/2" (13-16 mm) main tube sections.



code	packaging qt	y pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91280	C 10	7,9 x 15,7 x 4	25 x 19 x 10	0,005	0,32	1440	8 000625 912803

TUBE CLAMP

7091096



For use when pressure in the 1/2" (13-16 mm) main tube exceeds 1,5 bar. Blister of 10 pcs.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91096	<u> </u>	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,39	1440	8 000625 910960

1/2" (13-16 mm) SUPPORT STAKE

7099090









Enables secure ground fixture of the 1/2" (13-16 mm) main tube. Blister of 8 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99090		4 x 20	13 x 22 x 7	20 x 39 x 13	0,010	1,40	288	8 000625 990900
91090	\bigcirc	10	15,4 x 24 x 3	28 x 25 x 19	0,013	1,72	480	8 000625 910908

THREADED DRAINAGE VALVE

7090920







Used for automatic drainage of the hose circuit. Recommended for zones subject to cold winters. With connector for 1/2" (13-16 mm) hose. Blister of 1 pc.

code	packaging q	ty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90920		ı	7,9 x 15,7 x 3,5	12 x 19 x 10	0,002	0,16	1152	8 000625 909209

WALL HOSE CLAMPS

7091097



NEW FOR 2023





Allows the 1/2" (13-16 mm) main hose to be firmly attached to a vertical surface

8 000625 910977

Blister pack of 5 pcs with screws and plugs.

淵	
daber	

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91097	10	7,9 x 15,7 x 3,7	25 x 19 x 10	0,005	0,70	1440

1/4" 2-WAY COUPLING

7099155



7091155







Easy grip and watertight seal, guaranteeing no leakage. Used to branch off 1/4" (4-6 mm) feeding tube sections from 1/2" (13-16 mm) main tube or to join two feeding tube sections. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
99155		20 x 20	7,5 x 13 x 10	10 x 39 x 13	0,010	0,75	2560	8 000625 991556
91155		13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,39	1872	8 000625 911554

1/4" ELBOW

7091143





Easy grip and watertight seal, guaranteeing no leakage. For connecting two pieces of 1/4" (4-6 mm) feeding hose at right angle. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91143	\bigcirc	13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,40	1872	8 000625 911431

1/4" 3-WAY COUPLING

7091141







Easy grip and watertight seal, guaranteeing no leakage. Enables coupling of three 1/4" (4-6 mm) feeding tube sections. Blister of 10 pcs.

code	packaging q	ty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91141	□ 1.	3	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,42	1872	8 000625 911417

1/4" 4-WAY COUPLING

7091145







Easy grip and watertight seal, guaranteeing no leakage. Enables coupling of four 1/4" (4-6 mm) feeding tube sections. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91145	\bigcirc	13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,39	1872	8 000625 911455

HOLE PLUGS

7091170





Easy grip and watertight seal, guaranteeing no leakage. For sealing holes on 1/2" (13-16 mm) main tube or ends of 1/4" (4-6 mm) feeding tube. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91170		13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,40	1872	8 000625 911707

1/4" SHUT-OFF VALVE

7091270





For 1/4" (4-6 mm) feeding tube. Enables water flow adjustment and shut-off. Blister of 5 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
91270		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,35	1440	8 000625 912704

HOLE PUNCHER/SPANNER

7091185





Used to punch holes in 1/2" (13-16 mm) main tube. Also enables tightening and adjustment of micro-sprinklers.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91185	<u> </u>	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,26	1440	8 000625 911851


1/4" SUPPORT STAKE

7099190









code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99190		10 x 40) 14 x 19 x 3	20 x 39 x 13	0,010	2,61	720	8 000625 991907
91190		10	15.4 x 24 x 2.5	28 x 25 x 19	0.013	1.45	480	8 000625 911905



RAINJET® DRIPPERS

Claber drippers accurately distribute the ideal amount of water, always ensuring the best wellbeing of your plants.

Drippers, shrubblers and micro-mist sprayers let you create an efficient, completely autonomous irrigation line on any terrace, balcony, flowerbed or vegetable patch, distributing the quantity calibrated for each plant around its roots.

The wide range of Claber drippers comes with accessories and ready-to-use kits, to meet any irrigation need, without wasting a single drop of water. Smart irrigation that respects the environment, by Claber.



0-6 L/H END-OF-LINE DRIPPER

7099209



7091209



7091211



7091213





Bar	0,5	1,0	1,5	2,0	2,5
L/H	3,8	5,4	6,7	7,8	9

Adjustable from 0 to 6 litres for calibrated irrigation, to plants' different needs and soil type.

Blister pack: 91209 – 10 pcs 91211 – 20 pcs 91213 – 40 pcs



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99209		6 x 50	15 x 30 x 3	20 x 39 x 13	0,010	1,90	432	8 000625 992096
91209	\bigcirc	10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,74	1440	8 000625 912094
91211		10	10 x 20,6 x 4	28 x 25 x 13	0,009	1,44	720	8 000625 912117
91213	\bigcirc	8	15,4 x 24 x 3,5	28 x 25 x 19	0,013	2,25	384	8 000625 912131

0-6 L/H IN-LINE DRIPPER

7099217



7091217





Adjustable from 0 to 6 litres for calibrated irrigation, to plants' different needs and soil type. Blister pack containing: 10 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
L/H	1,8	3,6	4,8	5,4	6,1


code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99217		6 x 50	14 x 18 x 5	20 x 39 x13	0,010	2,14	432	8 000625 992171
91217		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,80	1440	8 000625 912179

0-10 L/H PLUS END-OF-LINE DRIPPER

7091214







Bar	0,5	1,0	1,5	2,0	2,5
L/H	9,1	12,5	26	19,5	24

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91214	<u> </u>	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,92	1440	8 000625 912148

0-10 L/H PLUS IN-LINE DRIPPER







In-line dripper for localized watering. 0-10 I/h adjustable flow rate, from fully closed to fully open. Accurate and calibrated flow control without twisting the tube. Direct connection between two ends of the feeding tube, with easy coupling and watertight seal. Readily inspectable for easy cleaning. Blister pack containing: 10 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
I/H	10	12.3	16	18.6	21

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91218	10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,94	1440	8 000625 912186

THE RELEASE OF WATER IS ACCURATE AND STEADY IN EVERY SITUATION





Bar

Bar

0,5

26,8 38,4

0,5

SELF-REGULATING DRIPPER

7099222

7091222





Constant 4 I/h flow rate at start and end of line. For direct installation into the 1/2" (13-16 mm) main tube or into the 1/4" (4-6 mm) feeding tube. Easily disassembled for cleaning.

Blister of 10 pcs.

1 ³)	weight (kg)	pcs/pallet		

1,0

1,5

2,0

2,0

55,3

47,4

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99222		10 x 50	14 x 17 x 4	20 x 39 x 13	0,010	2,80	720	8 000625 992225
91222	\bigcirc	10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,69	1440	8 000625 912223

0-40 L/H ADJUSTABLE DRIPPER 7099225



7091225





For direct installation into the 1/2" (13-16 mm) main tube or into the 1/4" (4-6 mm) feeding tube. Flow rate adjustable from 0 to 40 litres per hour. Easily disassembled for cleaning. Blister of 10 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
L/H	6,1	9,1	11,6	13,4	16,2

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99225		10 x 50	14 x 22 x 6,5	20 x 39 x 13	0,010	2,55	720	8 000625 992256
91225		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,66	1440	8 000625 912254

ADJUSTABLE SHRUBBLER

7099232



7091232





0-40 l/h adjustable flow, from fully closed to fully open. Watering over an area of 360°. Direct connection into the 1/4" (4-6 mm) feeding tube or into the 1/2" (13-16 mm) main tube. Readily inspectable for easy cleaning.

Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99232		10 x 50	14 x 22 x 3	20 x 39 x 13	0,010	2,65	720	8 000625 992324
91232		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,71	1440	8 000625 912322

0-40 L/H ADJUSTABLE **DRIPPER**







Adjustable dripper on spike.

For direct installation into the 1/4" (4-6 mm) feeding tube. Ensures precise and localised irrigation at plant base.

Flow rate adjustable from 0 to 40 litres per
hour. Easily disassembled for cleaning.
Blister of 10 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
L/H	6,1	9,1	11,6	13,4	16,2

0,5

26,8

0,5

4,1

1,0

3,9

1,5

4.0

2,0

3,7

33,7

1,0

46,3

1,5

56,7

2,0

65,4

L/H

1,0

38,4

1,5

47,4

2,0

55,3

62,0

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91227		15,4 x 24 x 2,5	20 x 39 x 10	0,007	0,98	576	8 000625 912278

0-40 L/H ADJUSTABLE SHRUBBLER

7099228



7091228







Adjustable shrubbler on spike. Flow rate is adjustable from 0 to 40 litres

per hour.

. Ensures precise and localised irrigation at plant base.

Flow rate is adjustable according to various plant requirements. For direct installation into the 1/4" (4 - 6 mm) feeding tube. Easily disassembled for cleaning. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99228		6 x 25	13 x 23 x 5	20 x 39 x 13	0,010	1,97	432	8 000625 992287
91228		6	15,4 x 24 x 2,5	20 x 39 x 10	0,007	1,02	576	8 000625 912285

360° MICRO MIST SPRAYER ON SPIKE

7091229





packaging qty

code

91229

Micro mist sprayer, installed on spike. Ensures a soft and even irrigation over an area of 360°.

Connected to the end of a 1/4" (4-6 mm) feeding tube. Easily anchored to the soil. Readily inspectable for easy cleaning. Blister of 10 pcs.

pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
15,4 x 24 x 2,5	20 x 39 x 10	0,007	1,02	576	8 000625 912292

L/H

SELF-REGULATING DRIPPER ON SPIKE

7091223







Self-regulating dripper on spike. Constant 4 I/h flow rate at start and end of line.

Ensures precise and localised irrigation at

. Connected to the end of the 1/4" (4-6 mm) feeding tube. Easily disassembled for cleaning.

Rinsé head under running water to clean. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91223	\bigcirc	6	15,4 x 24 x 2,5	20 x 39 x 10	0,007	0,98	576	8 000625 912230

RAINJET® KIT

RainJet kits include everything you need to set up a drip-irrigation system for your terrace or vegetable patch by yourself: main and feeding hoses, drippers, couplings and – for the timer kits – a battery-powered water timer. RainJet kits can be used to water between 20 and 60 plants, depending on the chosen solution, and they can be extended at any time with additional RainJet components. A highly practical solution that guarantees well-balanced irrigation!










ORTO DRIP KIT

7090767







This ready-to-use kit is the best solution for watering your vegetable garden, adjusting the flow and adapting it to the different plants needs.

This kit contains all the components for setting up 6 irrigation zones and watering up to 60 plants, with adjustable drippers (40 end-of-line and 20 shrubblers) and 25 m of main hose.

CONTAINS

90365	Main tube 25 m	x 1	91086 1/2" End stopper	x 12
8627	3/4"Threaded tap connector	x 1	91090 1/2" Support stake	x 35
91009	Automatic coupling	x 1	91185 Hole puncher/spanner	x 1
91280	1/2" Shut-off valve	х б	91170 Hole plugs	x 10
91081	1/2" Elbow coupling	x 7	91214 0-10 L/h plus end-of-line dripper	x 40
91071	1/2"Tee	x 11	91232 Adjustable shrubbler	x 20

code
90767



40 x 40 x 12

pack size (cm)

box size (cm) 40 x 40 x 12 volume (m3) 0,019

weight (kg) pcs/pallet

3,50

8 000625 907670

TIMER KIT 20 LOGICA

7090766





Sec. 20	Complete kit with 20 in-line drippers.
	Extensible by the addition of other components in the RainJet series.
	Contains: Logica water timer.

CONTAINS

8422	Aquauno Logica	x 1		91190	1/4" support stake	x 20
90370	Feeding tube 20 m	x 1		91217	0-6 l/h in-line dripper	x 20
91040	Pressure reducer	x 1		91270	1/4" shut-off valve	x 3
91141	1/4" tee	x 5		91345	1/2" - 1/4" hose threaded adaptor	x 1
91170	Hole plugs	x 10	ľ	91494	3/4" automatic adaptor	x 1

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90766		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,24	96	8 000625 907663

DRIP STARTER KIT

7090764





Complete kit with 20 in-line drippers. Extensible by the addition of other components in the RainJet series.



CONTAINS

90370 Feeding tube 20 m	x 1	91217 0-6 l/h in-line dripper	x 20
91040 Pressure reducer	x 1	91270 1/4" shut-off valve	x 3
91141 1/4" tee	x 5	91345 1/2" - 1/4" hose threaded adaptor	x 1
91170 Hole plugs	x 10	91494 3/4" automatic adaptor	x 1
91190 1/4" support stake	x 20		

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90764	4	30 x 30,5 x 4,4	39 x 39 x 19	0,029	3,50	96	8 000625 907649

DRIP KIT PLUS 25 POTS

7090759





Ready-to-use kit for optimum watering of plants on the terrace or in flowerbeds, adjusting the flow and adapting it to what the different plants need. Contains all the connections to make a drip irrigation system to water up to 25 plants with adjustable in-line Plus drippers and 25 m of feeding hose.



CONTAINS

345073 Feeding tube 25 m	x 1	91218 0-10 l/h in-line dripper	x 25
91040 Pressure reducer	x 1	91270 1/4" shut-off valve	x 3
91141 1/4" tee	x 5	91345 1/2" - 1/4" hose threaded adaptor	x 1
91170 Hole plugs	x 10	91494 3/4" automatic adaptor	x 1
91190 1/4" support stake	x 25		

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90759	✓ 1	29 5 x 30 5 x 7 5	29 5 x 30 5 x 7 5	0.007	1 00	96	8 000625 907595

TIMER KIT 20 PRATICO

7090763







Complete kit with 20 in-line drippers. Extensible by the addition of other components in the RainJet series. Contains: Pratico water timer.

CONTAINS

8425	Aquauno Pratico	x 1	91190	1/4" support stake	x 20
90370	1/4" feeding tube 20 m	x 1	91217	0-6 l/h in-line dripper	x 20
91040	Pressure reducer	x 1	91270	1/4" shut-off valve	x 3
91141	1/4" tee	x 5	91345	1/2" - 1/4" hose threaded adaptor	x 1
91170	Hole plugs	x 10	91494	3/4" automatic adaptor	x 1

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90763		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,23	96	8 000625 907632

TERRAZZO DRIP KIT

7090772







Ready-to-use kit to water plants on your terrace or flower beds, adjusting the flow according to the different requirements.
This kit contains all the components for setting up an irrigation system to water up to 50 plants, with adjustable drippers (30 in-line and 20 end-of-line), 25 m of main tube and 25 m of feeding tube.

CONTAINS

90365	Main tube 25 m	x 1	91073	1/2" - 1/4" 2 - way coupling	x 15
345073	1/4" feeding tube 25 m	x 1	91086	1/2" end stopper	x 1
91002	Multi-thread tap connector	x 1	91090	1/4" support stake	x 50
91009	Automatic coupling	x 1	91218	0-10 l/h plus in-line dripper	x 30
91280	1/2" shut-off valve	x 1	91214	0-10 l/h plus end-of-line dripper	x 20
91081	1/2" elbow coupling	x 5			

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90772		1	40 x 40 x 12	40 x 40 x 12	0,019	3,43	54	8 000625 907724









RAINJET® MICRO-SPRINKLERS

Claber micro-irrigation is inspired by soft spring rains: tiny droplets, precisely distributed, fall gently onto leaves, crops and flowers, even the most delicate ones, always delivering the optimum amount of water and preventing any waste.

The micro-sprinklers are easy to install straight onto feeding hoses and main hoses, or onto suitable rods to raise them to the right height. RainJet micro-sprinklers, a gentle caress of water for healthier, more beautiful plants.



360° MICRO-SPRINKLER

7091256







Suitable for watering circular areas. For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube, or on fitted rigid risers for overhead installation.

For overhead installation. Blister of 10 pcs. Irrigated area max. 16 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91256		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440	8 000625 912568

Bar

I/h 22,0

Øm

0,5

3,0

0.5

1,2 2,0 2,2 2,2 2,5

Bar

I/h 17,0 33,0 45,0 59,0 61,0

r(m)

Bar

I/h 17,0

r(m)

Bar 0.5

I/h 17,0 33,0 45,0 58,0 61,0

r(m)

3,2 5,5 7,2 8,5 9,0

0,5

13.0

1,0

I/h

Øm

1,0

19,0 23,0

1,6 1,8 2,0 2,0

1,5 2,0 2,5

26,0 29,0

0,5 1,0

1,5 2,2 2,7 3,0 3,2

33,0 45,0 59,0 61,0

1,0 | 1,5 | 2,0 | 2,5

1,5 2,0 2,5

1,0 1,5 2,0 2,5

1,0 | 1,5 | 2,0 | 2,5

34,0 46,0 52,0 72,0

3,5 4,5 4,0

4.0

180° MICRO-SPRINKLER

7091255







Suitable for watering semi-circular areas. For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube, or on fitted rigid risers for overhead installation.

For overhead installation.

Blister of 10 pcs. Irrigated area max. 10 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91255		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440	8 000625 912551

90° MICRO-SPRINKLER

7091254







Suitable for watering right-angled corners. For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube, or on fitted rigid risers for overhead installation. For overhead installation.

Blister of 10 pcs. Irrigated area max. 8 m².

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91254	<u> </u>	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440	8 000625 912544

MICRO-SPRINKLER STRIP

7091257







Used for watering rectangular strips.
Used either into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.

For overhead installation. Blister of 10 pcs. Irrigated area max. 6,8 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91257	\bigcirc	10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440	8 000625 912575

360° MICRO-MIST SPRAYER

7091258







For light mist sprinkling. Used either into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation. Blister of 10 pcs.

Irrigated area max. 3 m².

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91258	<u> </u>	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440	8 000625 912582

360° ADJUSTABLE MICRO-SPRINKLER

7091249





Suitable for watering circular areas. Used either directly into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation. Equipped with adjustment and shut-off

Bar	0,5 22,0 3,0	1,0	1,5	2,0	2,5
l/h	22,0	34,0	46,0	52,0	72,0
Øm	3,0	3,5	4,5	4,0	4,0
			'		

Blister of 5 pcs. Irrigated area max. 16 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91249	\bigcirc	10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,42	1440

180° ADJUSTABLE MICRO-SPRINKLER

7091248





Suitable for watering semi-circular areas. Used either into the 1/2'' (13-16 mm) main tube, the 1/4'' (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.

1,0 2,0 2,5 I/h 17,0 33,0 45,0 59,0 61,0 1,2 2,0 2,2 2,2 2,5 r(m)

Equipped with adjustment and shut-off valve. Blister of 5 pcs. Irrigated area max. 10 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91248	\bigcirc	10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,41	1440

360° ADJUSTABLE MICRO-SPRINKLER

7091250





Suitable for watering circular areas. For installation into the 1/2'' (13-16 mm) main tube, the 1/4'' (4-6 mm) feeding tube or on fitted rigid risers for overhead

Equipped with flow adjustment and shut-off valve. Blister of 5 pcs. Irrigated area max. 57 m².

Bar	0,5	1,0	1,5	2,0	2,5
l/h	48,8	90,0	120,0	142,0	165
Øm	3,0	5,0	6,5	7,5	8,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91250	\bigcirc	10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,48	1440

MICRO-SPRINKLER SUPPORT **STAKE**

7091265





Used for overhead installation of micro sprinklers according to various plant heights. Adjustable height: 30 - 50 cm. Header bag of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91265		8	8 x 33 x 1,5	20 x 39 x 10	0,007	0,66	768

FITTED RIGID RISERS

7091260





Allows to rise the micro-sprinklers and micro-sprayers at 30 cm. Screwed directly into the 1/2" (13-16 mm) main tube. Header bag of 10 pcs.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91260		8 y 33 y 1	20 x 39 x 10	0.007	0.99	960

AQUA-MAGIC® SYSTEM

Plants and flowers enthusiasts do not always have a tap available to water their pots on their terrace or balcony. Claber has the answer to this frequent problem: Aqua-Magic System. This ready-to-use kit allows you to set up a drip irrigation system without needing to connect to the power or water mains. Everything you need comes in the kit: a special timer with a built-in pump and a photovoltaic panel, drippers and all the accessories for watering up to 20 pots.

Aqua-Magic System can be used together with any standard water recipient or with the Aqua-Magic Tank, a special foldable tank that can hold up to 80 litres of water. It is easy to transport and assemble and takes up minimum space.



claber

POWERED BY SUNLIGHT THANKS TO THE PHOTOVOLTAIC PANEL THAT RECHARGES THE BATTERIES

WEBSITE



QUICK AND EASY TO PROGRAMME WITH TWO SIMPLE DIALS

AQUA-MAGIC SYSTEM

708063







Independent ready-to-use drip kit. It includes timer, photovoltaic panel and built-in pump to draw water from a tank, filter and deliver it to 20 drippers.

Inspectable filter for easy cleaning.

The photovoltaic panel absorbs the light energy and turns it into electrical energy which is accumulated in 2 rechargeable AA 1.2V NiMH 1800mAh batteries (not included). A specific led reports the battery level. 54 possible irrigation solutions, which can be set with just 2 rotating knobs: one with the frequencies (between 1 and 7 days), the other with the amount of water that you wish to deliver with each dripper (between 40ml and 200ml). Optional manual irrigation: 100ml per dripper (the programme remains stored). It can be used with any tank.

The kit contains:

- 1 solar timer-pump
- 1 anti-siphon flow blocking valve at the end of irrigation
- 1/4" suction filter 1 bracket with screws and plugs for wall-mounting 20 self-regulating drippers 20m of 1/4" (4-6 mm) feeding tube

- 20 1/4" support stakes
- 5 1/4" 3-way couplings
- 6 hole plugs

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8063	\otimes	1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,26	108

AQUA-MAGIC TANK







Folding tank with a capacity of 80 litres for Aqua-Magic System (code 8063).

Easy assembly with polypropylene sleeves.
Sturdy and stable thanks to the easy-to-assemble aluminium frame with special anti-scratch covering. Equipped with a special coupling bar to position Aqua-Magic System. Dimensions when open: 40 x 40 x 85 cm.

At the end of the season, it can be tidely stored, taking up minimum space.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8061		1	47 x 13 x 56	47 x 56 x 13	0,034	3,15	28

SPARE DRIPPERS

708064







Spare in-line Aqua-Magic drippers for localised irrigation.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8064	10	8 x 10 x 2,5	13 x 19 x 10	0,002	0,32	2880

10 m HOSE 1/4" (4-6 mm)


708068



10 m coil of spare feeding tube, 1/4" (4-6 mm) diameter.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8068		4	20 x 4 x 20	23,7 x 17,5 x 16,5	0,007	0,95	504

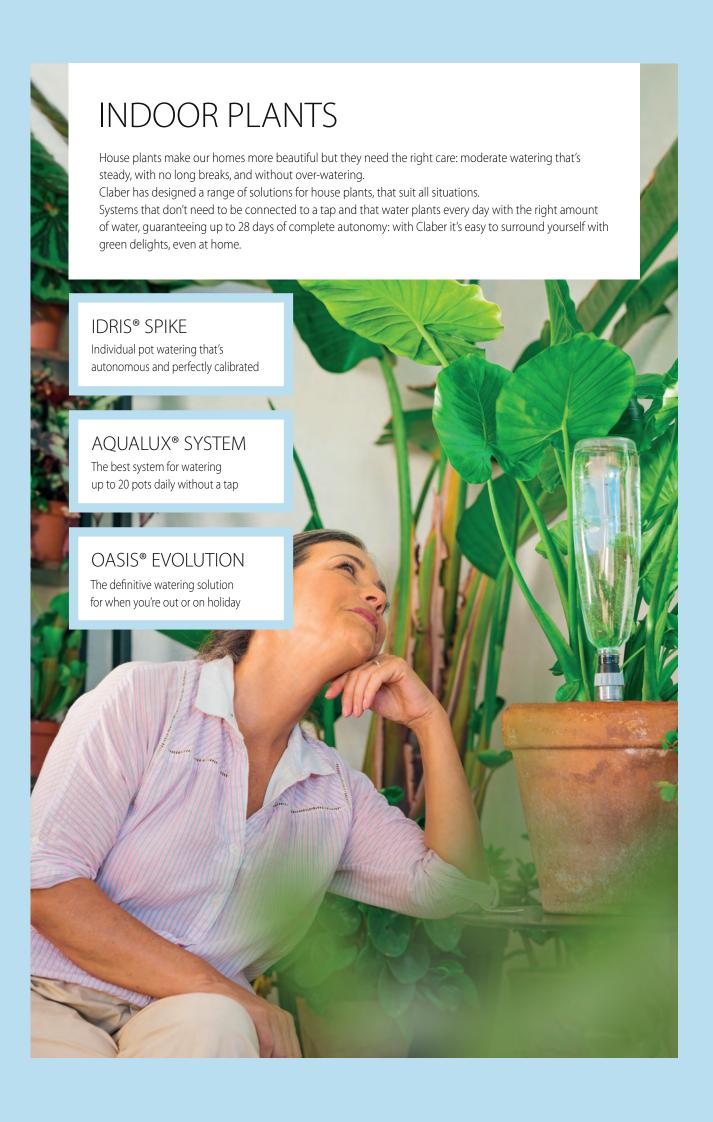

IDRIS® SPIKE

Idris Spike is the exclusive sprinkler designed to water pot plants steadily and with the right amount of water. It's the ideal solution for when you are away from home for a long period, but it is also useful when you are at home. It guarantees your plants' well-being, without you needing to water them by hand.


You can use any normal plastic bottle with Idris Spike and you do not need to connect it to the power mains. It guarantees up to 20 days of autonomous watering. Made from a tough plastic material that is resistant to knocks and limescale, complete with drippers with different flow rates, and designed to be ultra-sturdy, Idris Spike is ideal for all plants: at home, on the balcony and in the office.



IDRIS SPIKE

708052






Automatic dripper for pot plants. New conical connector suitable for standard plastic bottles up to 2 litres.

Supplied complete with 2 nozzles, rated 10 and 15 cl.

The spike is anchored into the soil, near the plant roots.

Inspectable and washable under running water.



box size (cm) code pack size (cm) 8052 16 x 30 x 4 25 x 59 x 19 0,028

volume (m3)

weight (kg) pcs/pallet 1,60 288



OASIS® EVOLUTION

Even more versatile and high-performing, unbeatably practical and reliable: Oasis Evolution is the new version of the Oasis water distributor.

With no need of a tap or an electrical power supply, Oasis Evolution enables you towater up to 20 pots for several days. All you have to do is set up a simple drip-irrigation line using the drippers and accessories provided.

There is a handy dial for viewing and selecting 1 of the 4 different watering programmes displayed on the backlit screen. Delayed starts are also possible.

Perfect for watering house plants when you go on holiday.



OASIS EVOLUTION

708054







Fully independent water-distributor, ready to use in few minutes and extremely compact. No need of connections to a tap or power mains. Oasis Evolution contains 25 litres of water and provides waste-free drip irrigation for up to 20 pots running on a daily cycle. Four different programmes (7, 14, 21, 28 days of autonomy), selected with a simple dial. Start button to start the programme immediately or with a delay of up to 23 hours. The backlit LCD display shows the selected programme, duration of the irrigation cycle in progress, any programmed delay, and the time remaining until the next irrigation cycle. Compact, elegant design that overlooks no detail. Operated by 2 x AA 1.5 V batteries (not included). Supplied with 10 metres of PVC feeding hose, 20 drippers and 20 hose stakes.

PROGRAMME TABLE

PROGRAMME	mi PER DRIPPER			
7 days	145 ml			
14 days	70 ml			
21 days	45 ml			
28 days	35 ml			



ode	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
3054		1	36,5 x 32 x 36	37 x 37 x 34	0,047	3,50	18

SPARE DRIPPERS

708059







Spare in-line Oasis Evolution drippers for localised irrigation. Pack of 5 pcs.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8059	10	8 x 10 x 2.5	13 x 19 x 10	0.002	0.27	2880

AQUALUX® SYSTEM

Aqualux System is the new versatile system by Claber, for watering potted plants every day without the need of a connection to a tap.

Agualux can be assembled in just a few minutes and guarantees up to 4 weeks of autonomy, thanks to its large 30-litre tank.

The integrated electric pump operates an irrigation system with fixed-flow drippers, which can water up to 20 pots. There are 4 different programmes to choose from with a practical dial, the option to delay the start and a backlit display that makes programming simple and accurate. The power supply system is innovative, with a USB adapter to connect to the mains, or 2 x AA rechargeable batteries that guarantee operation for the full duration of the programme, even when there is no electrical power supply.

A versatile, reliable and easy-to-use solution to create a true drip irrigation system.







AQUALUX® SYSTEM

708062









Water distributor with integrated timer and pump to create a drip irrigation system for up to 20 pots. Suitable for house plants as well as for terraces and balconies.

The system can be powered electrically by a USB adaptor (included), or 2 rechargeable AA 1.2V NiMH batteries, min. 2400 mAh (not supplied). Foldable water tank in thick PVC, 30-litre capacity.

Handy opening at the top for filling. No tools required to assemble the upright supports. Four different programmes (7, 14, 21, 28 days of autonomy), selected with a simple dial. Start button to start the programme immediately or with a delay of up to 23 hours. The backlit LCD display shows the selected programme, the duration of the watering cycle in progress, any programmed delay and the time remaining until the next irrigation cycle. Contains:

- 20 metres of PVC feeding hose
- 20 drippers
- 20 hose stakes
- 5 tees
- 6 end-of-line plugs.


PROGRAMME TABLE

PROGRAMME	mi PER DRIPPER
7 days	200 ml
14 days	100 ml
21 days	65 ml
28 days	50 ml

pack size (cm) box size (cm) volume (m3) weight (kg) pcs/pallet code packaging 8062 40 x 40 x 20 40 x 40 x 20 0,032 24 3,60

	I	T	ı	T	I
		Enth Carlo	orto car 889	Tanco and co	Ginnor Will Skill
CODE	8052	90764	90759	90763	90766
DESCRIPTION	Idris Spike	Kit Drip 20 pots	Kit Drip Plus 25 pots	Timer Kit 20 Pratico	Timer Kit 20 Logica
Contents	1 MAX	20 MAX	25 MAX	20 MAX	20 MAX
Water supply					
Ideal for	Indoor plants	Outdoor pot plants	Outdoor pot plants	Outdoor pot plants	Outdoor pot plants
Extendable	no	yes	no	yes	yes
Electric power supply	-	-	-	1 x 9V 9V ALKALINE	1 x 9V 9V ALKALINE
Timer included	-	no	no	yes, Aquauno Pratico (8425)	yes, Aquauno Logica (8422)
LCD screen	-	-	-	no	no
Method of programming	-	-	-	buttons	rotary knob
Days of autonomy	max 20 (with 2 I bottle)	-	-	-	-
Watering frequency	1 per day	as you wish, depending on the timer used	as you wish, depending on the timer used	1 per day	from 2 per day to 1 per week
Delayed start	no	possible, depending on the timer used	possible, depending on the timer used	no	no
Drippers provided		Fight		Claber	CHOPPE
Type of dripper	interchangeable, with fixed flow rate	adjustable 0-6 l/hr	adjustable 0-10 l/hr	adjustable 0-6 l/hr	adjustable 0-6 l/hr
Hose supplied					

GENERAL STREET	Common Satura Sa	Agro-Allerbi	SOUTH STATE OF THE PARTY OF THE	Acqualus
90767	90772	8063	8054	8062
Vegetable patch drip kit	Terrace drip kit	Aqua-Magic System	Oasis Evolution	Aqualux System
60 MAX	50 MAX	20 MAX	20 MAX	20 MAX
Vegetable patches	Outdoor pot plants	Outdoor pot plants	Indoor plants	Indoor and outdoor plants
no	yes	no	no	no
-	-	photovoltaic panel and 2 x HR6/AA 1,2 VNIMH ALKALINE min. 1800 mAh batteries	2 x AA 1,5 V ALKALINE	power supply unit with USB socket or 2 x HR6/AA 1,2VNiMH ALKALINE min. 2400 mAh batteries
no	no	yes	yes	yes
-	-	no	yes	yes
-	-	2 rotary knobs	rotary knob	rotary knob
-	-	variable, depending on tank used	max 28	max 28
as you wish, depending on the timer used	as you wish, depending on the timer used	from 1 per day to 1 per week	1 per day	1 per day
possible, depending on the timer used	possible, depending on the timer used	yes, by setting the watering frequency every day +6 hours	yes, up to 23 hours	yes, up to 23 hours
adjustable 0-10 l/hr (91214) and 0-40 l/hr (91232)	with fixed flow rate	with fixed flow rate	with fixed flow rate	with fixed flow rate

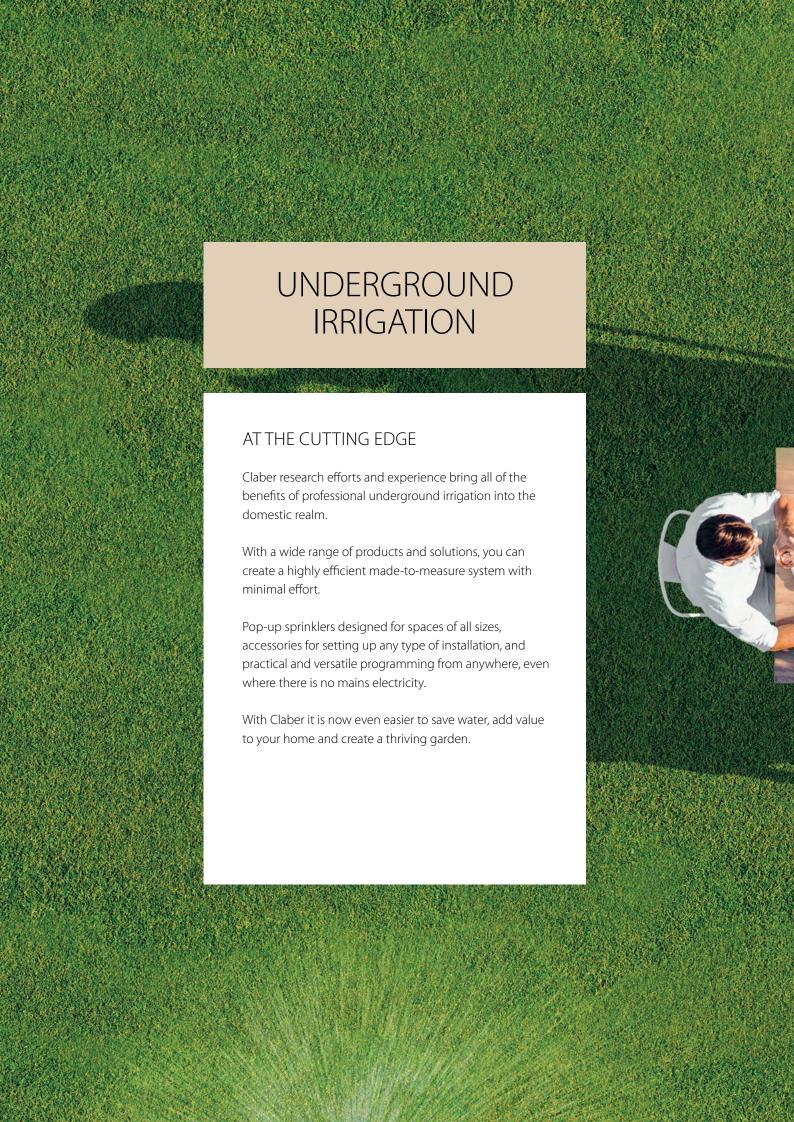





MASTERFUL IRRIGATION, AVAILABLE TO ALL

Pop-up sprinklers bring professional quality and performance to any garden.
This wide range of sprinklers with an easy-to-adjust jet allow you to water just where is needed, for a perfectly kept garden with no wasted water.



SMART INNOVATION

More tech, more flexibility, less hassle. The innovative timers and control units by Claber allow you to manage any garden installation, from the smallest to the largest.



A TECHNOLOGICAL HUB IN YOUR GARDEN

A rich technology hub to help you manage small and large gardens alike, Hydro-4 holds a timer and 4 solenoid valves in a small valve box, serving up to four independent irrigation lines.





COLIBRÌ® SYSTEM

With the Colibrì System, Claber brings all of the advantages of underground irrigation into small green spaces too! It is easy to use, saves on water, keeps your lawn and plants looking good and healthy, and makes the most of your garden. Colibrì is easy to install, with no need to dig large holes or connect up to the power mains. All you need is one of Claber's battery-powered timers connected to the tap to make sure your

garden has just the right amount of water at the right time, even when you are away or on holiday.

And with the new jet adjustment, you just need two fingers for perfect, targeted irrigation with no waste!




COLIBRÌ SYSTEM

GEAR-DRIVEN TURBINE

BODY AND ROD IN SHOCKPROOF ABS

Underground irrigation for small gardens

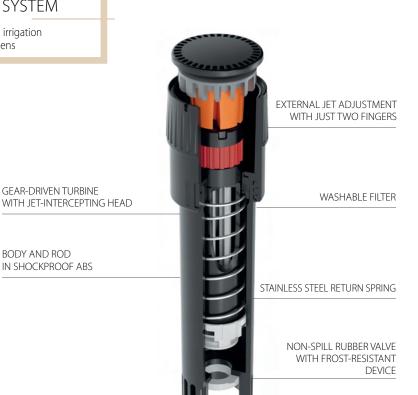



360° COLIBRÌ MICRO-SPRINKLER 7090210



180° COLIBRÌ MICRO-SPRINKLER 7090220



90° COLIBRÌ MICRO-SPRINKLER 7090230







Underground micro-sprinkler with low water consumption. Ideal for watering vegetable patches and small gardens, even at low pressure.

Gear-driven device made from acetal resin.

External adjustment of range. Micro-sprinkler is connected to the 1/2" (13-16 mm) main hose by means of the 1/2" (15-21 mm) threaded 3-way connector (cod. 91072/91017) or 1/2" (15-21 mm) threaded elbow (cod. 91082/91019/91021).

Height from ground: 2" (5 cm).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90210		12	4 x 14,3 x 4	23,7 x 17,5 x 16,5	0,007	1,10	1512
90220		12	4 x 14,3 x 4	23,7 x 17,5 x 16,5	0,007	1,10	1512
90230		12	4 x 14,3 x 4	23,7 x 17,5 x 16,5	0,007	1,10	1512

7090210

360°			r	<u> </u>
BAR	l/min	m²		
1,5	4,0	38,5	r 3,5 m	5,0 m
2,0	4,5	50,2	r 4,0 m	5,7 m
3,0	5,1	63,6	r 4,5 m	6,4 m



180°			r	1
BAR	l/min	m²		
1,5	2,9	25,1	r 4,0 m	5,7 m
2,0	3,3	31,8	r 4,5 m	6,4 m
3,0	3,6	34,7	r 4,7 m	6,7 m

90230

90°			r	
BAR	I/min	m²		
1,5	1,7	9,6	r 3,5 m	5,0 m
2,0	2,0	13,8	r 4,2 m	6,0 m
3,0	2,1	13,8	r 4,2 m	6,0 m

GUARD COLLAR


7090250





For optimum installation of Colibrì micro-sprinklers. Traps sand and pebbles from the soil. Bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90250		10	12 x 15,5 x 3,5	10 x 39 x 13	0,005	0,38	1280

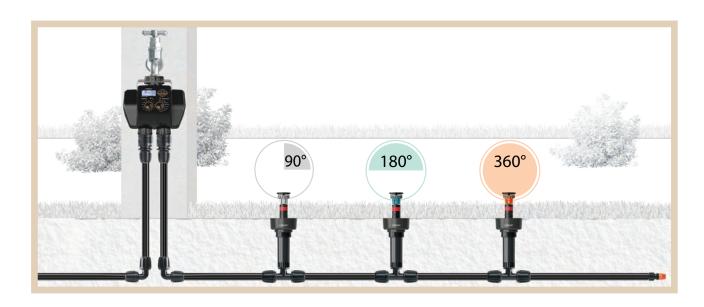

COLIBRI STARTER KIT

7090200







Starter kit for an underground watering system for 50 m² garden, complete with Colibrì System micro-sprinklers. Additional micro-sprinklers and Colibrì System accessories are also available as required.

The compact colour packaging features easy assembly instructions of all kit components.

CONTAINS


3291	Main tube 25 m	x 1
91347	1/2" hose threaded adaptor	x 1
91494	3/4" automatic adaptor	x 1
91081	1/2" elbow coupling	x 5
91071	1/2" tee	x 2
91082	1/2" (15-21 mm) threaded elbow	x 2

91072	1/2" (15-21 mm) threaded 3 - way connector	x 3
90920	Threaded drainage valve	x 1
90210	360° - 2″ micro-sprinkler	x 1
90220	180°- 2" micro-sprinkler	x 4
91096	Tube clamp	x 24
90250	Guard collars	x 5

 code
 packaging
 qty
 pack size (cm)
 box size (cm)
 volume (m³)
 weight (kg)
 pcs/pallet

 90200
 1
 40 x 40 x 12
 40 x 40 x 12
 0,019
 2,70
 54

EXAMPLE OF SYSTEM WITH THE COLIBRÌ STARTER KIT

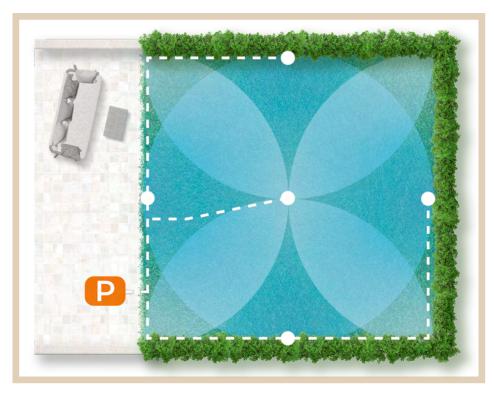

MAIN REQUIREMENTS:

- Pressure: minimum 2.5 bars
- Flow rate: at least 21 l/min
- Garden shape: regular (square or slightly rectangular; e.g. 7 x 7 m, 8 x 7 m, 8 x 8 m)
- · Water supply: water mains

FEATURES:

- The kit comes with fixed angle sprinklers (1 x 360°, 4 x 180°)
- Colibrì sprinklers have a jet of min. 3.5 m - max. 4.5 m
- The area behind the sprinklers is also watered for about 30-40 cm.



The underground micro-irrigation system created with the Colibri Starter Kit can easily be automated by using a Claber one-way tap timer (Aquauno, Aquauno Plus and Tempo, from page 88).



TURBO-JET 80°-360° - 3"

7090264



Dynamic pop-up sprinkler featuring low water consumption. Ideal for small gardens, even with low water pressure. Special internal gear mechanism rotating at constant speed, guaranteeing balanced watering. Working arc adjustable from 80° to 360°. Jet range adjustable by turning the ring nut. Inspectable and washable filter. Standard 1/2" (15-21 mm) threaded base. Height from ground 3" (cm 7,5). Packs of 12 pcs.

		90°	<u> </u>		180°	<u> </u>		360°	99
BAR	l/min	r		I/min	r		I/min	r	
1,5	1,48	4,0	4,8 m	2,56	3,5	4,2 m	4,67	3,6	4,3 m
2,0	1,73	4,5	5,4 m	2,85	4,5	5,4 m	5,27	4,25	5,1 m
3,0	2,07	5,25	6,3 m	3,46	5,0	6,0 m	6,41	5,0	6,0 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90264		12	5,1 x 14 x 5,1	10 x 39 x 13	0,005	1,10	1536

TURBO-JET 80°-360° - 4"

7090266



Dynamic pop-up sprinkler featuring low water consumption. Ideal for small gardens, even with low water pressure. Special internal gear mechanism rotating at constant speed, guaranteeing balanced watering. Working arc adjustable from 80° to 360°. Jet range adjustable by turning the ring nut. Inspectable and washable filter. Standard 1/2" (15-21 mm) threaded base. Height from ground 4" (cm 10). Packs of 12 pcs.

		90°	<u> </u>		180°	<u> </u>		360°	Ţ
BAR	I/min	r		l/min	r		l/min	r	
1,5	1,48	4,0	4,8 m	2,56	3,5	4,2 m	4,67	3,6	4,3 m
2,0	1,73	4,5	5,4 m	2,85	4,5	5,4 m	5,27	4,25	5,1 m
3,0	2,07	5,25	6,3 m	3,46	5,0	6,0 m	6,41	5,0	6,0 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90266		12	5,1 x 14 x 5,1	10 x 39 x 13	0,005	1,16	1536



MULTIPLA TIMERS

Multipla timers are the perfect synthesis of technology, design, ease of use and versatility, with the option to choose from different preset programmes on 6 independent lines, simply by turning a dial.

The large LCD display shows how many minutes remain until the next irrigation cycle and the countdown for the irrigation cycle in progress.

Multipla is made of materials resistant to humidity, UV rays and weathering, and comes in two versions: with a 24 V transformer or operated by a 9 V alkaline battery, which lasts for the whole season. Multipla brings underground irrigation to areas without mains electricity connections.



MULTIPLA AC 230/24 V LCD

708058







Easy-to-program 6-line electronic timer: just turn the 6 dials to set the required irrigation schedule: 5 - 10 - 15 - 20 - 30 - 60 minutes.

There is a frequency control for selecting the repetition of the watering programme at predefined intervals: 8h - 12h - 24h - 2 days - 3 days - 4 days - 7 days.

There is a start button for immediate activation of the programme or the manual function for the system test phase - "start + ... hours" button for a 23-hour delay in activation of the

An intermittent LED system indicates valve opening.

A safety timer delays valve opening by 5 seconds. Pump control. 9 V buffer battery. External 220 - 24 V transformer included.

Compliant with CE standards.

Designed for direct connection to the Rain Sensor.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8058	□ 1	22 x 22 x 12,5	22 x 22 x 12,5	0,004	1,42	84

MULTIPLA DC 9 V LCD

708060







Easy-to-program 6-line electronic timer: just turn the 6 dials to set the required irrigation schedule: 5 - 10 - 15 - 20 - 30 - 60 minutes.

There is a frequency control for selecting the repetition of the watering programme at

predefined intervals: 8h - 12h - 24h - 2 days - 3 days - 4 days - 7 days. There is a start button for immediate activation of the programme or the manual function for the system test phase - "start + ... hours" button for a 23-hour delay in activation of the programme.

An intermittent LED system indicates valve opening.

A safety timer delays valve opening by 5 seconds.

Powered by two 9 V alkaline batteries, sufficient for an entire season.

Compliant with CE standards.

Designed for direct connection to the Rain Sensor.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8060	<pre>1</pre>	22 x 22 x 7,5	22 x 22 x 7.5	0.004	0.88	144

AOUA-HOME 4-6-8

Aqua-Home is the underground irrigation timer designed to guarantee professional performance in any type of garden. With its compact and elegant design, it is easy to install and use; it is equipped with a large LCD display, 4 buttons and a dial to manage watering on up to 8 lines. What's more, it is innovative and ultra reliable! Instead of a traditional buffer battery, it has a super capacitor (SuperCap) with a practically unlimited duration.

SuperCap stores enough energy to keep the timer settings stored if the power supply is temporarily interrupted.



AQUA-HOME 4-6-8

708022



A timer for up to 8 watering lines that is easy to install and use, with a dial, 4 buttons and a

large LCD display which makes the set data easy to read.


The watering duration can be set (from 1 minute to 4 hours and 15 minutes) for each line, with two independent watering cycles and up to 4 daily starts per cycle.

Offering useful functions such as setting the irrigation frequency (weekly, cyclical from 1 to 12 days, even/odd days), Water Budget to change watering from between 0% and 200%, Rain-Stop when it rains. Manual irrigation is also possible and can be customised between 5 minutes and 4 hours and 15 minutes.

Aqua-Home is equipped with an internal capacitor (SuperCap), which stores energy when the timer is operating normally.

This means it retains the timer settings, should the electrical power supply temporarily fail (saved in the memory for up to 2 days).

Irrigation can also be set to semi-automatic. 230 V AC external transformer included. Designed for direct connection to the Rain Sensor (90915).





RAIN SENSOR





Suitable for all watering systems, the rain sensor avoids unnecessary wastage of water by turning the sprinklers off when it is raining. When the internal flow reaches a level of 5 mm of rain per square metre, the system shuts down.

Programmed watering automatically resumes when the water in the sensor evaporates. The rain sensor should be installed in an outdoor

area exposed to rain using the stainless steel bracket provided.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90915		2	8.5 x 11 x 20.5	25 x 19 x 10	0.005	0.64	288

HYDRO-4®

Modern lifestyles and ways of living are reflected in a steady move towards small- and medium-sized gardens. When it comes to watering these green spaces, Claber has come up with the answer: Hydro-4.

A single watertight valve box with built-in battery-powered timer and 4 solenoid valves, ready for quick DIY installation. HYDRO-4 can be installed above-ground or underground and controls up to 4 underground, drip or above-ground irrigation lines for your lawn, flowerbed or vegetable patch. Unparalleled versatility!

Hydro-4 is IP68 certified and set up for a cableless connection with the RF Rain Sensor.





HYDRO-4

Irrigation made to measure



SIMPLE PROGRAMMING JUST 3 BUTTONS



A SINGLE SOLUTION 4 IRRIGATION LINES







HYDRO-4

7090829







Preassembled valve box incorporating 4 solenoid and a timer. Power provided by two 1.5 V AAA batteries, enough to last an entire season. On/off control for up to 4 independent underground or drip irrigation lines. Easy programming procedure, using just 3 buttons and a large size display. Watering time 1 to 60 minutes. 2 programs for each outlet, up to 8 watering allowing exclusion of single days.

Watering time 1 to 60 minutes. 2 programs for each outlet, up to 8 watering cycles per day.
Weekly setting, allowing exclusion of single days.
Manual test of 5 minutes duration, variable in the same way as for watering times.
A perfectly sealed IP 68 unit.
Protective cover and buttons in bi-material rubber.

Protective cover and buttons in bi-material rubber.
Facility of viewing and deleting programs entered for each line.
3/4" M (20-27 mm) connections on both inlet and outlet sides.
Wireless connection to radio frequency Rain Sensor.
5 threaded caps provided for unused outlets.
4 solenoids valves.

Watering line flow rates: max 25 l/min at 2,5 bar. Operating pressure: min 1 - max 6 bar. Operating temperature: 3 - 60 °C. Dimensions: diameter 200 - height 153 mm.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90829	1	25 x 23 x 17	25 x 23 x 17	0,010	2,50	60

RF RAIN SENSOR







Rain sensor operating on radio frequency. Suspends watering in case of rainfall. Dialogues with Tempo and Dual timers, the radio frequency system and Hydro-4. The RF Rain Sensor is designed for open air installation, exposed to rainfall, using a special stainless steel bracket supplied with the product. No electrical connections are required: RF coverage up to 30 m. Powered by 2 x 1.5 V AA alkaline batteries.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90831	\hookrightarrow 1	8.5 x 11 x 20.5	8.5 x 11 x 20.5	0.002	0,23	288

PROGRAMMABLE UNITS

The "Elettra" programmable solenoid valve is a practical and reliable solution for programming irrigation systems without an electrical power supply.

As an alternative to valve box installation, there is a control unit powered by a 9 V alkaline battery, which allows you to open and close individual solenoid valves from the outside.

The new removable control units are also designed to guarantee IP 68 grade protection, the highest rating against water, solids and dust.



CONTROL UNIT





From a field station, the unit will pilot the opening and closing movements of one or two 9 V bistable solenoid valves installed in valve boxes.

Protected by 100% sealed cover operates also in total submersion.

Easy to program with three keys only. Irrigation time from 1 min to 23 h. 59 min.
With option of up to 6 irrigation cycles per day.
Manual and weekly programming with exclusion of specific weekdays as required.
Connected to a rain sensor (code 90915), the unit will suspend watering operations in the event of rainfall greater than 5mm per square metre.

Operates with a 9 V battery, sufficient for an entire season.
The control unit can be wall-mounted, using a special bracket, for ease of programming and practical maintenance.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90821	\bigcirc	1	11 x 11,5 x 19,5	11 x 19,5 x 11,5	0,002	0,58	240

1" (26-34 mm) F. PROGRAMMABLE SOLENOID VÁLVE

7090826





Can be installed directly on the tap or water well outlet. Protected by 100% sealed cover operates also in total súbmersion.

Easy to program with three keys only.

Irrigation time from 1 min to 23 h. 59 min.
With option of up to 6 irrigation cycles per day.

Manual and weekly programming with exclusion of specific weekdays as required.

Bistable 9 V solenoid with low power consumption.

Operates with a 9 V battery, sufficient for an entire season.

Electronic section separable from hydraulic section for easy programming or storage during

Operating pressure from 0,5 to 12 bar. 1"(26-34 mm) female inlet and outlet thread. Flow rate from 4,6 to 96 l/min. Operating temperature range $+5^{\circ}$ to $+70^{\circ}$.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90826	\Diamond	1	18.7 x 19.5 x 11	18 x 10.5 x 19	0.003	0.88	144

SOLENOID VALVES

This range of solenoid valves is reliable and long-lasting, thanks to the materials they are made of: metal parts are made of stainless steel and the body of nylon reinforced with glass fibre. 100% tried and tested, even at high pressure, they feature a manual opening/shut-off and solenoid rotation control. With a slow shut-off device to prevent pressure shock, solenoid valves have an operating pressure of 0.5-12 bar. Thanks to the new solenoid fitted with an anti-sand filter, which collects the impurities in the water and filters them from the irrigation circuit, Claber solenoid valves are top of the range.

9 V - 1" (26-34 mm) FEMALE SOLENOID VALVE







Solenoid valve equipped with solenoid with anti-sand filter. Works with the Multipla 9 V timer (cod. 8060) or with the 9 V control unit (cod. 90821). With 1" (26-34 mm) female inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shutoff device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar.

Flow rate from 4,6 to 96 l/min. Operating temperature range $+5^{\circ}$ to $+70^{\circ}$.

code	packaging q	ηty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90812	□ 1	l	12,7 x 15,3 x 7,5	12,7 x 15,3 x 7,5	0,001	0,40	336	8 000625 908127

9 V - 1" (26-34 mm) MALE SOLENOID VALVE 7090813





Solenoid valve equipped with solenoid with anti-sand filter. Works with the Multipla 9 V timer (cod. 8060) or with the 9 V control unit (cod. 90821). With 1" (26-34 mm) male inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shutoff device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90813	□ 1	12,7 x 15,3 x 7,5	12,7 x 15,3 x 7,5	5 0,001	0,40	336	8 000625 908134

24 V - 1" (26-34 mm) FEMALE SOLENOID VALVE







Solenoid valve equipped with solenoid with anti-sand filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" (26-34 mm) female inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90814	<u> </u>	12,7 x 15,3 x 7,5	12,7 x 15,3 x 7,5	0,001	0,40	336	8 000625 908141

24 V - 1" (26-34 mm) MALE SOLENOID VALVE 7090815






Solenoid valve equipped with solenoid with anti-sand filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" (26-34 mm) male inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90815	<u> </u>	12,7 x 15,3 x 7,5	12,7 x 15,3 x 7,5	0,001	0,40	336	8 000625 908158

UNDERGROUND IRRIGATION		CE rusbar		
CODE		8058	8060	8022
DESCRIPTION		MULTIPLA AC 230/24 V LCD	MULTIPLA DC 9 V LCD	AQUA-HOME 4-6-8
			50 cc	
Power supply battery		buffer - 1 x 9V 9V ALKALINE	9V 9V	
Protection rating	transformer	external 230-24V		external 230-24V
No. of lines				
No. of programmable solenoid valves		1 to 6	1 to 6	1 to 8
Display		√ · · · · · · · · · · · · · · · · · · ·	√ · · · · · · · · · · · · · · · · · · ·	√ · · · · · · · · · · · · · · · · · · ·
Operating temperature		3 - 50 °C	3 - 50 °C	3 - 50 °C
Controls		7 rotary knobs and 2 buttons	7 rotary knobs and 2 buttons	1 rotary knob and 4 buttons
No. of programmes		1	1	2
Irrigation duration		5 - 60 mins	5 - 60 mins	1 min - 4 h 15 mins
Watering frequency		from 3 per day to 1 per week	from 3 per day to 1 per week	from 8 per day (per line) to 1 every 12 days
Weekly programming		_	_	✓ ·
Manual mode		✓	✓	✓
Duration of manual irrigation		5 mins (early stop possible)	5 mins (early stop possible)	min. 5 mins - max. 4 h 15 mins (early stop possible)
Delayed start		Yes, up to 23 hours	Yes, up to 23 hours	You set the start time
Watering in progress indicator		YES (sprinkler icon and line number)	YES (sprinkler icon and line number)	YES (dial above set programme number flashes)
Power supply disconnected		✓	✓	_
Rain Sensor connection		YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)
Wall bracket		✓	✓	✓
Warranty		2 years	2 years	2 years

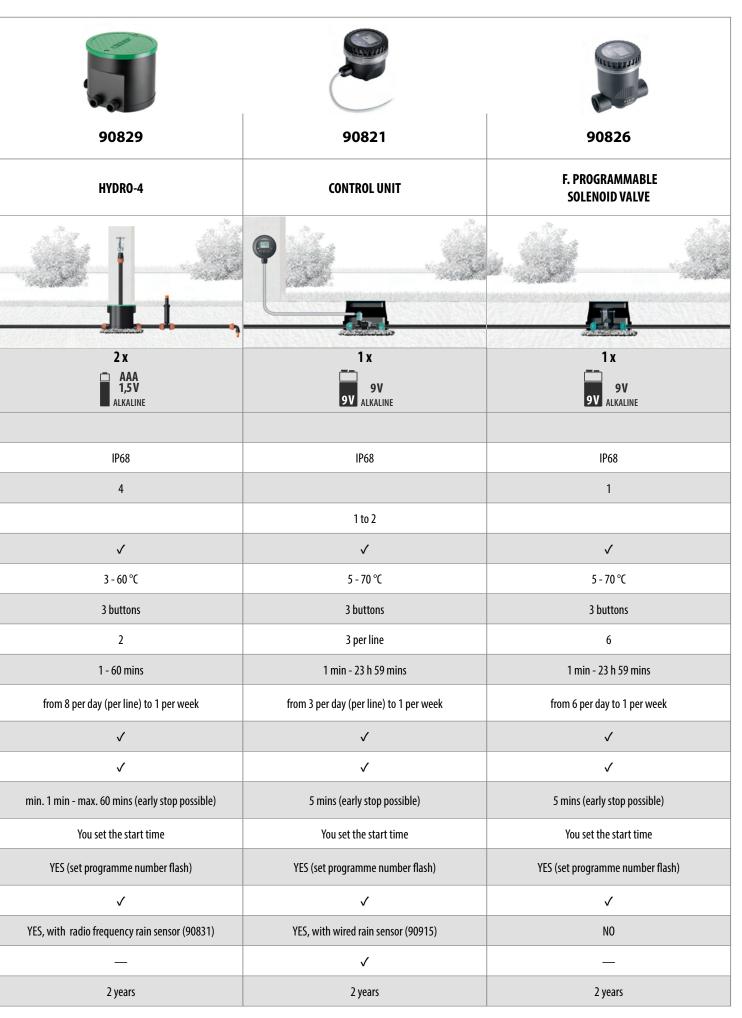

POP-UP SPRINKLERS

From Claber years of professional experience comes the pop-up sprinkler range. Designed and created to solve all your watering needs, these sprinklers are simple to use, while offering exclusive functional features. Claber pop-up come with 90°, 180° or 360° jets, or adjustable 0-350° jets. For long, narrow spaces there are square or rectangular area pop-up sprinklers. The jet can be easily adjusted at any time, using any standard hex key.



STAINLESS STEEL JET RANGE ADJUSTMENT SCREW WITH HEXAGONAL INSERT

WASHABLE FILTER TO ENSURE HIGH FILTERING POWER

STAINLESS STEEL RETURN SPRING

SELF-LUBRICATING CLUTCH (DELRIN) FOR ORIENTATION OF THE JET



HEAD ADJUSTABLE FROM 0° TO 350° WITH RING NUT SELF-LOCKING MECHANISM

> BODY AND ROD MADE OF SHOCK-RESISTANT PLASTIC (ABS)

NON-SPILL RUBBER CHECK VALVE WITH FROST-RESISTANT DEVICE

SEALING GASKETS FOR LEAKAGE-FREE INSTALLATION

0° - 350° - 2″ ADJUSTABLE POP-UP (5 cm)

7090004



0° - 350° - 3″ ADJUSTABLE POP-UP (7,5 cm) 7090005



0° - 350° - 4″ ADJUSTABLE POP-UP (10 cm) 7090006



Professional static sprinkler with 0-350° adjustable head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Comes in pack of 24 pcs. Irrigated area max. 78 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90004		24	3,7 x 10,9 x 3,7	20 x 39 x 13	0,010	1,45	1728	8 000625 900046
90005		24	3,7 x 13,4 x 3,7	20 x 39 x 13	0,010	1,60	1728	8 000625 900053
90006		24	3,7 x 16 x 3,7	20 x 39 x 13	0,010	1,80	1728	8 000625 900060





0°-350°	90°	180°	270°	350°	r	99
BAR	l/min	I/min	I/min	l/min		
1,5	2,8	5,3	7,7	9,2	r 4,0 m	5,7 m
2,0	3,3	5,8	9,0	10,8	r 4,5 m	6,4 m
3,0	4,0	6,9	10,8	13,0	r 5,0 m	7,1 m

ADJUSTABLE POP-UP 0° - 350° 6 L/MIN - 2" (5 cm)

7090020



ADJUSTABLE POP-UP 0° - 350° 6 L/MIN - 4" (10 cm) 7090019



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even

irrigation and minimal water consumption (6 l/min).

It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Comes in pack of 24 pcs. Irrigated area max. 55 m².

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90020	24	3,7 x 10,9 x 3,7	20 x 39 x 13	0,010	1,42	1728	8 000625 900206
90019	24	3,7 x 16 x 3,7	20 x 39 x 13	0,010	1,80	1728	8 000625 900190











90°	180°	270°	350°	r	<u> </u>
l/min	l/min	I/min	I/min		
2,0	3,3	4,5	6,0	r 3,7 m	5,3 m
2,2	3,6	5,2	6,8	r 4,0 m	5,7 m
2,5	4,4	6,4	8,2	r 4,2 m	6,0 m
	I/min 2,0 2,2	I/min I/min 2,0 3,3 2,2 3,6	I/min I/min I/min 2,0 3,3 4,5 2,2 3,6 5,2	I/min I/min I/min I/min 2,0 3,3 4,5 6,0 2,2 3,6 5,2 6,8	I/min I/min I/min I/min 2,0 3,3 4,5 6,0 r 3,7 m 2,2 3,6 5,2 6,8 r 4,0 m



Made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90007	12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728	8 000625 900077

360° JET POP-UP - 2" (5 cm)

7090041



360° JET POP-UP - 4" (10 cm)

Professional static sprinkler with 360° head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw.

The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Comes in pack of 12 pcs. Irrigated area max. 58 m².

7090043



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90041		12	3,7 x 11 x 3,7	10 x 39 x 13	0,005	0,78	1536	8 000625 900411
90043		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,93	1536	8 000625 900435



360°			r	9
BAR	l/min	m²		
1,5	8,2	43,0	r3,7 m	5,3 m
2,0	9,5	50,3	r 4,0 m	5,7 m
3,0	11,5	56,7	r 4,3 m	6,0 m

360° HEAD

7090044







Made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.

3
9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90044		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728	8 000625 900442

180° JET POP-UP - 2" (5 cm)

7090053



180° JET POP-UP - 4" (10 cm)

Professional static sprinkler with 180° head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation.

The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel

jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Comes in pack of 12 pcs. Irrigated area max. 31,8 m².

7090055



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90053		12	3,7 x 11 x 3,7	10 x 39 x 13	0,005	0,78	1536	8 000625 900534
90055		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,95	1536	8 000625 900558





180°			r	T
BAR	I/min	m²		
1,5	5,1	25,1	r 4,0 m	5,7 m
2,0	6,0	29,0	r 4,3 m	6,0 m
3,0	7,1	31,8	r 4,5 m	6,4 m

180° HEAD

7090056







Made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90056	12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728	8 000625 900565

90° JET POP-UP - 2" (5 cm)

7090095

90° JET POP-UP - 4" (10 cm)

Professional static sprinkler with 90° head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution.

Stainless steel jet range adjustment screw.
The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems.
Comes in pack of 12 pcs. Irrigated area max. 12,6 m².

7090097



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90095		12	3,7 x 11 x 3,7	10 x 39 x 13	0,005	0,78	1536	8 000625 900954
90097		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,93	1536	8 000625 900978



90°			r	
BAR	l/min	m²		
1,5	2,8	8,6	r 3,3 m	4,6 m
2,0	3,2	9,6	r 3,5 m	4,9 m
3,0	3,9	12,6	r 4,0 m	5,7 m

90° HEAD

90°

7090098







Made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90098	\square	12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,025	0,30	1728	8 000625 900985



SQUARE AREA POP-UP - 4" (10 cm)

7090133





Professional static sprinkler with square area. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw.
The standard 1/2" (15-21 mm) female connector allows it to be

mounted on existing systems. Height from ground 4" (10 cm). Comes in pack of 12 pcs.

Irrigated area max. 64 m².

BAR	I/min	m²	A B	
1,5	8,9	36,0	6 x 6 m	5,5 m
2,0	10,3	49,0	7 x 7 m	6,3 m
3,0	12,6	64,0	8 x 8 m	7,3 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
90133		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,95	1536	8 000625 901333

SOUARE AREA HEAD

7090134



Square area head: made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90134		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728	8 000625 901340

CENTRE-STRIP POP-UP - 4" (10 cm)7090109





Professional static sprinkler with centre-strip. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution.

Stainless steel jet range adjustment screw.
The standard 1/2" (15-21 mm) female connector allows it to be

mounted on existing systems. Height from ground 4" (10 cm). Comes in pack of 12 pcs. Irrigated area max. 20,3 m².

0				0 0
BAR	I/min	m ²	A B	→ —
1,5	6,8	13,2	12,0 x 1,1 m	
2,0	8,3	17,2	13,2 x 1,3 m	
3,0	10,2	20,3	13,5 x 1,5 m	1,2 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)		
90109		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,97	1536	8 000625 901098

CENTRE-STRIP HEAD

7090110





Centre-strip head: made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90110	12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728	8 000625 901104

END-STRIP POP-UP - 4" (10 cm)

7090121





Professional static sprinkler with end-strip. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation.

The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems.

Height from ground 4" (10 cm). Comes in pack of 12 pcs.

Irrigated area max. 11,2 m².

0				
BAR	l/min	m²	A B	→—←
1,5	3,8	8,0	8,0 x 1,0 m	
2,0	4,4	9,1	8,3 x 1,1 m	
3,0	5,4	11,2	9,3 x 1,2 m	1,1 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90121		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,95	1536	8 000625 901210

END-STRIP HEAD

7090122







End-strip head: made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90122	<u> </u>	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,31	1728	8 000625 901227

SET OF POP-UP SPARE PARTS

7090124







Set of spare parts comprising:

- 2 pop-up ring nuts
- 4 pop-up sealing gaskets for Pop-up, Colibrì and Turbo-Jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90124		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,46	1728	8 000625 901241

SET OF SPARE POP-UP AND COLIBRÌ FILTERS

7090123





5 replacement filters for Pop-up and Colibrì sprinklers.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90123	<u> </u>	7.9 x 15.7 x 2	25 x 19 x 10	0.005	0.33	1728	8 000625 901234



TURBINES

Claber's range of turbine sprinklers is carefully designed to best meet the irrigation needs of medium-sized and large gardens. Total reliability, versatility of use and silence during operation make the Claber turbines the ideal solution for professional quality DIY systems. The many regulation options, from the angle of rotation to the range of the jet, ensure the best irrigation efficiency.





ANGLE OF ROTATION ADJUSTMENT

DIFFUSER SCREW

INTERCHANGEABLE NOZZLE

HYDRAULIC MOTOR

STAINLESS STEEL RETURN SPRING

BODY AND ROD MADE OF SHOCK-RESISTANT PLASTIC (ABS)

WASHABLE FILTER

MEDIUM-JET TURBINE SPRINKLER

7090474







LONG-JET TURBINE SPRINKLER 7090478







MULTI-JET TURBINE WITH LONG JET RANGE 7090480









Medium-jet turbine sprinklers with interchangeable nozzles. A working range that can be adjusted from 40° to 360°, with just a simple flat head screwdriver, a pointer on the lid showing the selected work arc. The sprinkler can be regulated before installation, after installation in a static position, or during operation. A special mechanism avoids damage to the gears during regulation. Internal removable filter. Running pressure from 1.5 to 4 bars. Radius from 4 to 9 m. 1/2" (15-21 mm) screw base. Height from ground 4" (10 cm). Packs of 12 pcs. Irrigated area max. 254 m².

40°-3	60°			r	<u> </u>	40°-360°			r		40°-360°			r	
BA	R		I/min			BAR		I/min			BAR		l/min		
		0,75	2,7	r 4,8 m	6,8 m		0,75	2,8	r 5,0 m	7,1 m		0,75	3,1	r 5,2 m	7,4 m
		1	4,4	r 5,8 m	8,2 m		1	4,8	r 5,9 m	8,3 m		1	5,8	r 6,3 m	8,9 m
1		1,5	4,5	r 6,7 m	9,5 m)	1,5	5,1	r 6,9 m	9,8 m	3	1,5	6,7	r7,2 m	10,2 m
'		2	6,0	r7,2 m	10,2 m	_	2	6,6	r7,5 m	10,6 m		2	8,3	r 8,1 m	11,5 m
		3	9,4	r 8,0 m	11,3 m		3	10,0	r 8,4 m	11,9 m		3	11,8	r 9,0 m	12,7 m

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90474	12	7 x 15,5 x 6,5	18 x 40 x 18	0,012	2,21	840	8 000625 904747



Long range jet rotating sprinkler with interchangeable nozzles. Adjustable from 30° to 360° without extraction of the mechanism. Slits for eliminating any sand in the water. Removable internal filter. Silent operation due to internal lubrication. Height from ground 5" (12,5 cm). 3/4" (20-27 mm) female threaded base. Adjusting spanner supplied. Comes in pack of 8 pcs. Irrigated area max. 670 m².

30°-360°			r		30°-360°			r		30°-360°			r	
BAR		I/min			BAR		I/min			BAR		I/min		
1	0,5 0,75 1 2 2,5 3 4 6	1,5 2,2 3,5 7,9 8,4 11,4 13,6 19,8 25,8	r 8,5 m r 9,6 m r 9,0 m r 11,4 m r 10,2 m r 10,4 m r 12,1 m r 13,3 m r 11,8 m	12,0 m 13,6 m 12,7 m 16,1 m 14,4 m 14,7 m 17,1 m 18,8 m 16,7 m	2	0,5 0,75 1 2 2,5 3 4 6	1,7 2,6 4,2 8,7 9,5 12,9 15,5 22,0 28,4	r 9,1 m r 9,8 m r 9,1 m r 11,6 m r 10,7 m r 10,7 m r 12,8 m r 14,0 m r 12,8 m	12,9 m 13,9 m 12,9 m 16,4 m 15,1 m 15,1 m 18,1 m 19,8 m 18,1 m	3	0,5 0,75 1 2 2,5 3 4	1,9 3,0 4,9 9,5 10,6 14,4 17,4 24,2 31,0	r 8,8 m r 9,8 m r 9,8 m r 11,6 m r 11,0 m r 11,0 m r 13,4 m r 14,6 m r 13,7 m	12,4 m 13,9 m 13,9 m 16,4 m 15,6 m 15,6 m 19,0 m 20,6 m 19,4 m

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90478	8	9 x 19.5 x 8.5	20 x 39 x 23	0.017	3.30	384	8 000625 904785



Turbine sprinkler with 4 built-in nozzles to ensure uniform irrigation at any operating angle (adjustable between 40°-360°). Use a common screwdriver to select which nozzle to use, set the working angle and adjust the flow.

Special nozzles to ensure maximum efficiency and water savings.

Excellent performance, even at low pressure. Internal filter.

Recommended operating pressure between 2 and 5 bar. Radius between 9.8 and 11.0 m. 3/4" (20-27 mm) female threaded base, height from ground 5" (12,5 cm). Irrigated area max. 580 m².

	40°-360°			r	99	40°-360°			r	<u> </u>	40°-360°			r	
	BAR		l/min			BAR		I/min			BAR		l/min		
ſ		1	3,5	r7,5 m	10,7 m		1	4,8	r 10,0 m	14,2 m		1	5,9	r 10,5 m	14,9 m
	1	2	5,6	r 8,4 m	11,9 m)	2	7,9	r 11,0 m	15,5 m	2	2	9,8	r 12,0 m	17,0 m
ı	- 1	3	9,3	r 7,8 m	11,1 m	Z	3	13,3	r 11,8 m	16,7 m)	3	16,5	r 13,0 m	18,5 m
L		4	12,6	r 6,5 m	9,2 m		4	18,5	r 11,4 m	16,2 m		4	22,4	r 13,6 m	19,3 m


box size (cm) weight (kg) code packaging qty pack size (cm) volume (m³) pcs/pallet 8 000625 904808 90480 9 x 19 x 7,2 20 x 39 x 23 0,017 384 3,10

CODE		90004	90005	90006	90020	90019	90041	90043	90053	90055
DESCRIPTION								STATIC SPI	RINKLERS	
Туре	Static Dynamic	✓	√	√	√	√	√	√	√	√
Height from ground		2" (5 cm)	3" (7,5 cm)	4" (10 cm)	2" (5 cm)	4" (10 cm)	2" (5 cm)	4" (10 cm)	2" (5 cm)	4" (10 cm)
Main material		ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS
Connector		1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F
Operating pressure		1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar
		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	100 M	3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1					•	<u> </u>
Head	Fixed						✓	✓	✓	✓
	Adjustable	√	✓	√	√	√				
No. of nozzles		1	1	1	1	1	1	1	1	1
Shape of irrigation area		0°-350°	0°-350°	0°-350°	0°-350°	0°-350°	360°	360°	180°	180°
Irrigated area max. (m²)		78 m ²	78 m ²	78 m ²	55 m ²	55 m ²	58 m ²	58 m ²	31,8 m ²	31,8 m ²
at the pressure of		3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar
Diameter max. (m)		10	10	10	8,5	8,5	8	8	8	8
Flow rate (I/min)	Min.	9,2	9,2	9,2	6	6	7,6	7,6	4,1	4,1
	Max.	13	13	13	8,2	8,2	10,4	10,4	5,8	5,8
Removable internal filter		✓	✓	✓	✓	✓	✓	✓	✓	✓

90095	90097	90133	90109	90121	90210	90220	90230	90264	90266	90474	90478	90480
							7	URBINE S	PRINKLER	S		
✓	√	√	✓	✓								
					√	√	√	✓	√	√	√	√
2" (5 cm)	4" (10 cm)	4" (10 cm)	4" (10 cm)	4" (10 cm)	2" (5 cm)	2" (5 cm)	2" (5 cm)	3" (7,5 cm)	4" (10 cm)	4" (10 cm)	5" (12,5 cm)	5" (12,5 cm)
ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS
1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	3/4" F	3/4" F
1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar
•	0	•								9	3	
√	√	✓	√	✓	✓	√	√					
								✓	√	✓	√	√
1	1	1	1	1	1	1	1	1	1	5 interchangeable	9 interchangeable	4 built-in
		•	•									
90°	90°				360°	180°	90°	80°-360°	80°-360°	40°-360°	30°-360°	40°-360°
12,6 m ²	12,6 m ²	64 m ²	20,3 m ²	11,2 m ²	60 m ²	35 m ²	18 m ²	95 m ²	95 m ²	254 m ²	670 m ²	580 m ²
3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar
9	9	7 x 7	14 x 1	17 x 1	9	9,8	9,8	9	11	18	27,4	27,2
3,1	3,1	8,2	6,6	3,3	3,7	2,9	2	4,4	4,4	2,7	1,5	3,5
4	4	11,8	9	4,7	5	4	2,3	7,2	7,2	11,8	31	22,4
✓	√	✓	✓	√	✓	✓	✓	✓	✓	✓	✓	✓

UNDERGROUND ACCESSORIES

Valve boxes, pipes, connectors and accessories: there are the different components that make up an underground system. Claber means quality, durability and reliability in every detail, to ensure that your plants and lawn are always watered efficiently, at the right time and without wasting water. The Claber range also includes a sensor that stops the irrigation programme when it rains and then resumes it when the good weather returns, saving precious water.

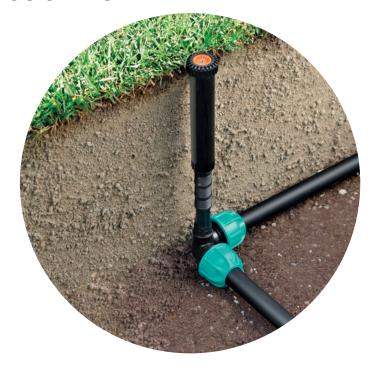

ACCESSORIES

Everything you need

T 1" (26-34 mm) F. x 1" (26-34 mm) F. x 1" (26-34 mm) M.

7090808





For connecting solenoid valves in series; o-ring seal.

code

90808

pack size (cm) 15 x 4,5 x 13 box size (cm) 10 x 39 x 13 volume (m³) 0,005

weight (kg) pcs/pallet

1280

8 000625 908080

1" (26-34 mm) F. x 1" (26-34 mm) M. ELBOW 7090807





For connecting a solenoid valve; o-ring seal.

code 90807 packaging qty

pack size (cm) 15 x 5 x 16

box size (cm) 10 x 39 x 13 volume (m3) 0,005

weight (kg) pcs/pallet 1280

0,94

8 000625 908073

1"(26-34 mm) F. x 1" (26-34 mm) M. COUPLING

7090803





Coupling for connection to solenoid valves; o-ring seal.

code pack size (cm) 15 x 4,4 x 13

box size (cm) 10 x 39 x 13 volume (m3) 0,005

weight (kg) 0,72

pcs/pallet

1280

8 000625 908035

8 000625 909100

1"(26-34 mm) M. x 1"(26-34 mm) M. NIPPLE 7090805





For connecting solenoid valves with connectors code 90807 - 90808.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90805		20	7 x 12 x 5	10 x 39 x 13	0,005	0,57	2560	8 000625 908059

1" (26-34 mm) M. 3/4" (20-27 mm) F. REDUCER 7090804





For connection of 1" (26-34 mm) solenoid valves with 3/4" (20-27 mm) couplings. Header bag of 2 pcs.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90804		10 x 2	6,5 x 12 x 3,5	10 x 39 x 13	0,005	0,44	1280	8 000625 908042

1/2" FEMALE THREADED CAP

7090801



To stop water flowing from a 1/2" M (15-21 mm) or 3/4" M (20-27 mm) threaded outlet that is no longer used (for example, \emptyset 20 mm threaded Tee or elbow connectors or threaded extensions with no sprinkler). Header bag of 2 pcs.

3/4" FEMALE THREADED CAP

7090802





1/2" M (15-21 mm) 3/4" M (20-27 mm)





code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90801		20 x 2	11 x 15 x 3	10 x 39 x 13	0,005	0,42	1280	8 000625 908011
90802		20 x 2	11 x 15 x 3,5	10 x 39 x 13	0,005	0,49	1280	8 000625 908028

DRAINAGE VALVE

7090910







For automatic circuit draining. Especially useful in areas with cold winters. Bronze with 1/2'' (15-21 mm) male thread and 3/4'' (20-27 mm) adaptor. Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90910		15 x 1	8 x 13 x 2	10 x 39 x 13	0,005	1,10	1920

3/4" F (20-27 mm) X 3/4" F (20-27 mm) ELBOW 7090709

1"F (26-34 mm) X 1"F (26-34 mm) ELBOW 7090710



3/4"F (20-27 mm)



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90709		20	Ø 5,2 x 5,2 x 3,6	Ø 10 x 39 x 13	0,005	0,75	2560	8 000625 907090
90710		20	Ø 6,2 x 6,2 x 4,4	Ø 10 x 39 x 13	0,005	1,07	2560	8 000625 907106

1/2" F (15-21 mm) X 1/2" F (15-21 mm) COUPLING 7090707

3/4" F (20-27 mm) X 3/4" F (20-27 mm) COUPLING 7090706

NEW FOR 2023

1"F (26-34 mm) X 1"F (26-34 mm) COUPLING 7090708



	1/2"F (15-21 mm) X 1/2"F (15-21 mm)		3/4"F (20-27 mm) X 3/4"F (20-27 mm)		1"F (26-34 mm) X 1"F (26-34 mm)
90707		90/06		90708	

code 90707	packaging	qty 40	pack size (cm) Ø 3,9 x 3,9 x 3,1	box size (cm) Ø 10 x 39 x 13	volume (m³) 0,005	weight (kg) 0,73	pcs/pallet 5120	8 000625 907076
90706		40	Ø 4,1 x 3,6 x 3,6	Ø 10 x 39 x 13	0,005	0,86	5120	8 000625 907069
90708		20	Ø 4,9 x 4,5 x 4,5	Ø 10 x 39 x 13	0,005	0,85	2560	8 000625 907083

3/4" F (20-27 mm) X 1/2" F (15-21 mm) COUPLING 7090704



1"F (26-34 mm) X 3/4"F (20-27 mm) COUPLING 7090705





code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90704		40	Ø 4,5 x 4,5 x 4,5	Ø 10 x 39 x 13	0,005	0,93	5120	8 000625 907045
90705		20	Ø 4,0 x 3,6 x 3,6	Ø 10 x 39 x 13	0,005	0,77	2560	8 000625 907052

3/4" F (20-27 mm) T CONNECTOR 7090712

1"F (26-34 mm) T CONNECTOR 7090711





code 90712	packaging	17	pack size (cm) Ø 8,1 x 6,3 x 4,4	box size (cm) Ø 10 x 39 x 13	volume (m³) 0,005	weight (kg) 0,94	pcs/pallet 2560	8 000625 907120
90711		20	Ø 6,7 x 5,2 x 3,6	Ø 20 x 39 x 13	0,010	1,57	1440	8 000625 907113

3/4" M (20-27 mm) X 1/2" M (15-21 mm) NIPPLE 7090703



3/4" M (20-27 mm) X 3/4" M (20-27 mm) NIPPLE 7090702



NEW FOR 2023

1" M (26-34 mm) X 3/4" M (20-27 mm) NIPPLE 7090701



1/2" M (15-21 mm) 3/4" M (20-27 mm) 3/4" M (20-27 mm) X 3/4" M (20-27 mm) X 1" M (26-34 mm)

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90703		40	Ø 4,3 x 2,6 x 2,6	Ø 10 x 39 x 13	0,005	0,58	5120	8 000625 907038
90702		40	Ø 4,4 x 2,6 x 2,6	Ø 10 x 39 x 13	0,005	0,63	5120	8 000625 907021
90701		40	Ø 4,7 x 3,5 x 3,5	Ø 10 x 39 x 13	0,005	0,86	5120	8 000625 907014

1/2" (15-21 mm) M THREADED CAP 7090714



3/4" (20-27 mm) M THREADED CAP 7090713



NEW FOR 2023

1" (26-34 mm) M THREADED CAP 7090715





code 90714	packaging	qty 20	pack size (cm) Ø 2,8 x 2,1 x 2,1	box size (cm) Ø 10 x 39 x 13	volume (m³) 0,005	weight (kg) 0,42	pcs/pallet 5120	8 000625 907144
90713		40	Ø 3 x 2,7 x 2,7	Ø 10 x 39 x 13	0,005	0,53	2560	8 000625 907137
90715		40	Ø 3.5 x 3.5 x 3.5	Ø 10 x 39 x 13	0.005	0.76	5120	8 000625 907151

Ø 3/4" (20-27 mm) - 1/2" (15-21 mm) THREADED EXTENSION







For fitting sprinklers to the polyethylene tubes (with compression connectors). Can be cut to the height desired. Header bag of 5 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90756		10 x 5	14 x 20 x 3	39 x 20 x 13	0,010	1,40	720	8 000625 907564

Ø 3/4" (20-27 mm) - 3/4" (20-27 mm) THREADED EXTENSION

7090765





For fitting sprinklers to the polyethylene tubes (with compression connectors). Can be cut to the height desired. Header bag of 5 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	# ### ## #### ##### #### #### ########
90765		10 x 5	15 x 19 x 5	39 x 20 x 13	0,010	1,74	720	8 000625 907656

Ø 1/2" (15-21 mm) - 1/2" (15-21 mm) THREADED EXTENSION

7090757







For fitting sprinklers to the polyethylene tubes (with compression connectors). Can be cut to the height desired. Header bag of 5 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90757		10 x 5	14 x 17 x 2	39 x 20 x 13	0,010	1,34	720	8 000625 907571

FLEXIBLE EXTENSION Ø 3/4" (20-27 mm) - 3/4" (20-27 mm)

7090747





For installation of pop-up sprinklers and turbines with bracket couplings, T-connectors, elbow connectors with female elbows.

Handy when soil settles or for reaching restricted points like corners of a garden or pavement edges. Length: 35 cm. Header bag of 1 pc.





pack size (cm) box size (cm) volume (m3) weight (kg) pcs/pallet packaging qty

8 000625 907472 90747 8 x 33 x 2,5 10 x 39 x 13 0,005 0,75 1024

FLEXIBLE EXTENSION Ø 3/4" (20-27 mm) - 1/2" (15-21 mm)

7090746







For installation of pop-up sprinklers and turbines with bracket couplings, T-connectors, elbow connectors with female elbows.

Handy when soil settles or for reaching restricted points like corners of a garden or pavement edges. Length: 35 cm. Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90746		8	8 x 33 x 2,5	10 x 39 x 13	0,005	0,75	1024	8 000625 907465

BRACKET COUPLING FOR Ø 32 mm HOSE 7090276



BRACKET COUPLING FOR Ø 25 mm HOSE 7090450



BRACKET COUPLING FOR Ø 20 mm HOSE 7090858





code

For installing a sprinkler on the main line without cutting the tube. Header bag of 2 pcs.



Ø 1" (26-34 mm) F MANUAL VALVE 7090917





Single-ring female/female Ø 1" (26-34 mm) manual valve for closing water line before the solenoid valves for inspection and maintenance.



Ø 3/4" (20-27 mm) F MANUAL VALVE 7090918





Single-ring female/female \emptyset 3/4" (20-27 mm) manual valve for closing water line before the solenoid valves for inspection and maintenance.



CIRCUIT FILTER





Polypropylene filter with 1" (26-34 mm) double male thread filter cartridge made from 120 mesh stainless steel wire netting. proceura from 0.5 to 8 har

Maximum	3 111711. Oper	iatiliy piessui	16 110111 0,3 10	o Dai.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90919		3	15 x 8 x 26	20 x 39 x 13	0,010	0,79	216	8 000625 909193

CIRCULAR VALVE BOX

7090500





Circular valve box with snap closure lid. Lateral openings at the base. It contains 1 valve.

A mm	B mm	H mm
Ø 290		250

code	packaging	qty	pack size (cm)	box size (cm)
90500		1	29 x 25 x 32	25 x 25 x 31





RECTANGULAR VALVE BOX

7090515





Rectangular valve box with tamper-proof lid. Resistant to high and low temperatures and UV radiation. It contains 4 valves.

A mm	B mm	H mm
400	510	310

	400	510	310
code	packaging qty	pack size (cm)	box size (cm)
90515	1	40 x 51 x 31	37 x 50 x 31

volume (m3) 0,057

volume (m³)

0,019

weight (kg) pcs/pallet 3,30

weight (kg) pcs/pallet

1,20



8 000625 905102

8 000625 909292

RECTANGULAR VALVE BOX

7090510





Rectangular valve box with tamper-proof lid. Resistant to high and low temperatures and UV radiation. A It contains 5 valves.

50 x 64 x 31


A mm	B mm	H mm
495	639	310

50 x 64 x 31

code

pack size (cm) box size (cm) packaging qty 90510

weight (kg) pcs/pallet volume (m³) 0,099 7,42



QUICK-CLICK STANDPIPE





Complete with bayonet rod featuring male Quick-Click connector for connecting the hoses in all garden corners. Automatic opening and shut-off valve. 3/4" (20-27 mm) male threaded for connection to bracket.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90930	4	15 x 8 x 22	20 x 39 x 13	0,010	1,39	288	8 000625 909308

SPARE ROD FOR QUICK COUPLING VALVE INLET







Bayonet rod featuring male Quick-Click connector for connecting hoses to every corner of the garden. Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90929		5	14 x 24 x 4	20 x 39 x 13	0,010	0,80	360

8 000625 903900 8 000625 903955

COMPRESSION CONNECTORS AND PIPES

Available in 20, 25 and 32 mm version, the range of pipes and connectors adapts to the size of your garden for made-to-measure solutions.

These compression fittings guarantee a perfect, watertight connection, and the extensive range means you can connect up to any water outlet, branch off from the irrigation line and install any pop-up sprinklers.



PETUBE Ø 20 mm





Coils of PFA6 polyethylene tube for compression connectors. Flexible. Resistant to algae formation and low temperatures.

90372 - 15 m 90373 - 25 m



code 90372	packaging	' '	pack size (cm) Ø 46 x 7	box size (cm) Ø 46 x 7	volume (m³) 0,001	weight (kg) 1,60	pcs/pallet	8 000625 903726
90373		1	Ø 46 x 13	Ø 46 x 13	0,016	2,70		8 000625 903733

PETUBE Ø 25 mm

7090380





Coils of PFA6 polyethylene tube for compression connectors. Flexible. Resistant to algae formation and low temperatures.

90380 - 25 m 90385 - 50 m

-	
466	

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90380	1	Ø 58 x 17,5	Ø 58 x 17,5	0,060	4,2		8 000625 903801
90385	1	Ø 58 x 25	Ø 58 x 25	0,084	8,6		8 000625 903856

PETUBE Ø 32 mm







Coils of PFA6 polyethylene tube for compression connectors. Flexible. Resistant to algae formation and low temperatures.

90390 - 25 m 90395 - 50 m

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg) pcs/palle	t
90390	1	Ø 73 x 15	Ø 73 x 15	0,063	6,60	
00305	a 1	Ø 86 v 10	Ø 86 v 10	0.110	13 20	

1" (26-34 mm) M. THREADED CONNECTOR Ø 20 mm

7090318



For connecting a polyethylene tube to a female 1"(26-34 mm) threaded water supply or solenoid valve (cod. 90812-90814).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90318		20	4,4 x 6,7 x 4,4	10 x 39 x 13	0,005	0,88	2560	8 000625 903184

1" (26-34 mm) F. THREADED CONNECTOR Ø 20 mm 7090319

For connecting a polyethylene tube to a 1" (26-34 mm) male threaded water supply or the connectors to the solenoid valves (cod. 90813 - 90815).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90319		20	4,4 x 6,9 x 4,4	10 x 39 x 13	0,005	0,93	2560	8 000625 903191

F. 3/4" (20-27 mm) - 1/2"THREADED CONNECTOR (15-21 mm) Ø 20 mm

7090320



For connecting a polyethylene tube to a 3/4"(20-27 mm) threaded tap or solenoid valve with male 3/4"(20-27 mm) or 1/2"(15-21 mm) thread.



code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet 90320 20 4,4 x 8,3 x 4,4 10 x 39 x 13 0,005 0,95 2560 8 000625 903207

COUPLING Ø 20 mm

7090321



For connecting two polyethylene tubes or repairing a punctured tube.



code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet
90321 5 4,4 x 8,9 x 4,4 10 x 39 x 13 0,005 0,87 1920 8 000625 903214

ELBOW CONNECTOR Ø 20 mm 7090322

~



For joining two polyethylene tubes at right angle.

code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet

90322 \ 15 8 x 4,4 x 8 10 x 39 x 13 0,005 0,91 1920 8 000625 903221

TØ 20 mm

7090323



For connecting three polyethylene tubes to create a branch off.



code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet

90323 10 11,7 x 8,2 x 4,4 10 x 39 x 13 0,005 0,88 1280 8 000625 903238

pcs/pallet

2560

8 000625 903276

1/2" (15-21 mm) M. THREADED ELBOW Ø 20 mm

7090324

For connecting Colibrì micro-sprinklers, Turbo-Jet, Pop-up sprinklers at the end of 20 mm main





code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90324		20	7,15 x 6,3 x 4,4	10 x 39 x 13	0,005	0,78	2560	8 000625 903245

1/2" (15-21 mm) M. THREADED T CONNECTOR Ø 20 mm

7090325





code	packaging (qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90325		15	11,7 x 6,4 x 4,4	10 x 39 x 13	0,005	0,98	1920	8 000625 903252

3/4" (20-27 mm) F. THREADED ELBOW Ø 20 mm

7090326

For connecting a threaded coupling or drainage valve to the end of the line.




code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90326		20	7,8 x 6,7 x 4,4	10 x 39 x 13	0,005	0,94	2560	8 000625 903269

END-OF-LINE PLUG Ø 20 mm

7090327

For closing off one end of the polyethylene tube.





Ø 16 mm - Ø 20 mm COUPLING 7090328

To connect two polyethylene hoses of different diameters, Ø 16 and 20 mm.







code

90424

90524

code

90420

code

90421

(cod. 90812-90814).

packaging qty

packaging qty

packaging qty

15

15

15

10

CONNECTOR Ø 25 mm

7090424



7090524






COUPLING Ø 25 mm 1" (26-34 mm) THREAD 7090420









For connecting a polyethylene tube to a female 3/4" (20-27 mm) threaded water supply or solenoid valve.

For connecting a polyethylene tube to a female 1" (26-34 mm) threaded water supply or solenoid valve

90424 F. 3/4" (20-27 mm) THREAD For connecting a 3/4" polyethylene tube to a 3/4" (20-27 mm) male

box size (cm)

10 x 39 x 13

10 x 39 x 13

box size (cm)

10 x 39 x 13

box size (cm)

10 x 39 x 13

90524 F. 1" (26-34 mm) THREAD For connecting a polyethylene tube to a 1" (26-34 mm) male threaded water

volume (m3)

volume (m3)

volume (m3)

0,005

0.005

0,005

0,005

weight (kg)

weight (kg)

weight (kg)

0,81

0,84

0,90

0,68

pcs/pallet

1920

1280

pcs/pallet

pcs/pallet

1920

1920

8 000625 904242

8 000625 905249

8 000625 904204

8 000625 904211

threaded tap or solenoid valve with male 3/4" (20-27 mm) thread.

supply or the connectors to the solenoid valve (cod. 90813-90815).

pack size (cm)

5,2 x 8,15 x 5,2

5,2 x 7,7 x 5,2

pack size (cm)

5,2 x 7,5 x 5,2

pack size (cm)

5,2 x 7,05 x 5,2



COL	ΙPΙ	₋IN	G	Ø	25	m	m

7090419



For connecting two polyethylene tubes or repairing a punctured tube.



N	7	

code packaging qty 90419

pack size (cm) 5,2 x 10,2 x 5,2 box size (cm) 10 x 39 x 13

volume (m3) 0,005

weight (kg) pcs/pallet 0,82 1152

8 000625 904198

ELBOW CONNECTOR Ø 25 mm 7090417



For joining two polyethylene tubes at right angle.

code 90417 packaging qty

pack size (cm) 5,2 x 10 x 5,2 box size (cm) 10 x 39 x 13

volume (m3) 0,005

weight (kg) pcs/pallet 896 0,73

8 000625 904174

8 000625 904228

"T" Ø 25 mm CONNECTORS

7090422



For connecting three polyethylene tubes to create a branch off.

code packaging gtv pack size (cm) box size (cm) volume (m3) weight (kg) pcs/pallet 90422 5.2 x 7.5 x 5.2 10 x 39 x 13 0.005 0.64 512

ELBOW Ø 25 mm F. 3/4" (20-27 mm) THREAD

7090423



For connecting a threaded coupling or drainage valve to the end of the line.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90423		12	8,9 x 7,5 x 5,2	10 x 39 x 13	0,005	0,83	1536	8 000625 904235

"T" Ø 25 mm 3/4" (20-27 mm) THREAD

7090418 \$\ightarrow\$

For installation on main polyethylene tube after cutting and joining two tube sections. With 3/4''(20-27 mm) female thread.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90418		6	16,5 x 8,3 x 6,2	10 x 39 x 13	0,005	0,75	768	8 000625 904181

ELBOW CONNECTOR Ø 25 mm F. 1/2" (15-21 mm) THREAD

7090427

For installation on main polyethylene tube after cutting and joining two tube sections. Used with 1/2" (15-21 mm) threaded extension.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90427		7	5,2 x 11,5 x 5,2	10 x 39 x 13	0,005	0,75	896	8 000625 904273

END-OF-LINE PLUG Ø 25 mm

7090425

For closing off one end of the polyethylene tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90425		15	5,2 x 5,9 x 5,2	10 x 39 x 13	0,005	0,77	1920	8 000625 904259

Ø 20 mm - Ø 25 mm COUPLING 7090428



To connect two polyethylene hoses of different diameters, Ø 20 and 25 mm.




code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90428		12	5,1 x 9,5 x 5,1	10 x 39 x 13	0,005	0,73	1536	8 000625 904280

CONNECTOR Ø 32 mm F. 3/4" (20-27 mm) THREAD 7090274

For connecting a polyethylene tube to a 3/4" (20-27 mm) threaded tap or solenoid valve with male 3/4" (20-27 mm) thread.





For connecting a polyethylene tube to a 1'' (26-34 mm) male threaded water supply or the connectors to the solenoid valves (cod. 90813-90815).



code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet
90374 12 6,2 x 8,15 x 6,2 20 x 39 x 13 0,010 1,16 864 8 000625 903740

COUPLING Ø 32 mm 1" (26-34 mm) THREAD 7090271

For connecting a polyethylene tube to a female threaded water supply or solenoid valve (cod. 90812-90814).



code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet
90271 20 6,2 x 8,2 x 6,2 20 x 39 x 13 0,010 1,70 1440 8 000625 9027 12

COUPLING Ø 32 mm

7090275

For connecting two polyethylene tubes or repairing a punctured tube.



 code
 packaging
 qty
 pack size (cm)
 box size (cm)
 volume (m³)
 weight (kg)
 pcs/pallet

 90275
 12
 6,2 x 12 x 6,2
 20 x 39 x 13
 0,010
 1,70
 864
 8 000625 902750



For joining two polyethylene tubes at right angle.

code packaging qty pack size (cm) box size (cm) volume (m³) weight (kg) pcs/pallet
90270 8 12 x 12 x 6,2 20 x 39 x 13 0,010 1,70 576 8 000625 902705

"T" Ø 32 mm CONNECTORS



For connecting three polyethylene tubes to create a branch off.

 code
 packaging
 qty
 pack size (cm)
 box size (cm)
 volume (m³)

 90272
 5
 16,5 x 11 x 6,2
 20 x 39 x 13
 0,010



weight (kg)

1,20

pcs/pallet

360

ELBOW Ø 32 mm F. 3/4" (20-27 mm) THREAD

7090273

For connecting a threaded coupling or drainage valve to the end of the line.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90273	12	10,5 x 8,1 x 6,2	20 x 39 x 13	0,010	1,30	864	8 000625 902736

"T" Ø 32 mm 3/4" (20-27 mm) THREAD

7090416



For installation on main polyethylene tube after cutting and joining two tube sections. With 3/4'' (20-27 mm) female thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90416		5	16,5 x 8,5 x 6,2	20 x 39 x 13	0,010	0,96	360	8 000625 904167

ELBOW CONNECTOR Ø 32 mm F. 3/4" (20-27 mm) THREAD

7090426

For installation on main polyethylene tube after cutting and joining two tube sections. Used with 3/4'' (20-27 mm) threaded extension.



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90426	8	11,5 x 6 x 6,2	20 x 39 x 13	0,010	1,36	576	8 000625 904266

END-OF-LINE PLUG Ø 32 mm

7090277

For closing off one end of the polyethylene tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90277		12	6,2 x 6,4 x 6,2	10 x 39 x 13	0,005	0,94	1536	8 000625 902774

Ø 25 mm - Ø 32 mm COUPLING 7090279

To connect two polyethylene hoses of different diameters, \varnothing 25 and 32 mm.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90279		12	6,2 x 11 x 6,2	20 x 39 x 13	0,010	1,43	864	8 000625 902798

A PROFESSIONAL RANGE

The quality and simplicity of Claber products are what make them the ideal solution for professionals too.

There is an entire range of underground irrigation products.

Turbine sprinklers, solenoid valves, timers and original solutions like Hydro-4, the pit equipped with a battery-operated timer and 4 solenoid valves, and Aqua-Radio, used to manage irrigation remotely via radio frequency.

Take underground irrigation anywhere. Guaranteed customer satisfaction.



RF REMOTE CONTROL 2 UNITS

708347



Radio frequency remote control operating 1 or 2 control units. Featuring just 5 buttons, for easy programming. Powered by two 1.5V AAA alkaline batteries, which will last an entire season.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8347		19,5 x 14,5 x 9	19,5 x 14,5 x 9	0,003	0,30		8 000625 083473

RF REMOTE CONTROL 6 UNITS

708348



Radio frequency remote control operating up to 6 control units. Featuring just 5 buttons, for easy programming Powered by two 1.5V AAA alkaline batteries, which will last an entire season.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8348		19,5 x 14,5 x 9	19,5 x 14,5 x 9	0,003	0,30		8 000625 083480

RF UNIT

708321



Control unit for expansion of radio-controlled irrigation system. Operated by RF remote control, not included. Can operate up to 4 independent 9V bistable solenoid valves (90812-90813). A perfectly sealed IP68 unit, which can be installed directly inside the valve box. Powered by two 1.5V AAA alkaline batteries, which will last an entire season.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8321		19 x 19,5 x 11	19 x 19,5 x 11	0,004	0,68		8 000625 083213

1" M. RF PROGRAMMABLE SOLENOID VALVE



Radio frequency programmable solenoid valve. Operates in connection with RF remote control, not included. RF coverage up to 30 m. Installed directly onto the water tap or water well outlet underground. Completely watertight cover, able to withstand even total submersion. IP 68 certification: the highest level of protection against immersion and direct water sprays. Powered by 2 x 1.5 V AAA alkaline batteries, which will last an entire season.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8323		19 x 19,5 x 11	19 x 19,5 x 11	0,004	0,89		8 000625 083237

HYDRO-4 RF

7090839



Preassembled valve box incorporating 4 solenoid and a timer. Operates in connection with RF remote control, not included. Power provided by two 1.5V AAA batteries, enough to last an entire season. On/off control for up to 4 independent underground or drip irrigation lines. Easy programming procedure, using just 3 buttons and a large size display. A perfectly sealed IP 68 unit. Wireless connection to radio frequency Rain Sensor.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90839		25 x 23 x 17	25 x 23 x 17	0,010	2,41		8 000625 908394



METEOCOMETA 6





A professional interactive timer which is specific to underground irrigation, drip irrigation and micro-irrigation. Manage up to 6 zones, with two independent programmes: A and B. Up to 4 starts per day per programme. Duration of irrigation: from 1 minute to 4 hours and 15 minutes. Weekly cyclical programming up to 12 days or on odd/even days. Water Budget, Rain Stop and test functions.
Internal transformer 230/24V, 50/60 Hz, 24V. Meteocometa is equipped with an internal capacitor (SuperCap),

which stores energy when the timer is operating normally.

This means it retains the timer settings, should the electrical power supply temporarily fail (saved in the

memory for up to 2 days). Rain Sensor connection possible.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8017		18 x 29 x 9,5	18 x 29 x 9,5	0,005	1,31		8 000625 080175

METEOPRAGMA 12



A professional interactive timer which is specific for underground irrigation, drip irrigation and micro-irrigation. Ideal for watering large residential or public green spaces, as well as sports grounds. It can manage up to 12 zones with 3 independent programmes and 4 different starts per programme.

Duration of irrigation: from 1 minute to 4 hours and 15 minutes. Weekly cyclical programming up to 12 days or on odd/even days. Water Budget, Rain Stop and test functions. Internal transformer 230/24V, 50/60 Hz, 24VA. Meteopragma is equipped with an internal capacitor (SuperCap), which stores energy when the timer is operating normally.

This means it retains the timer settings, should the electrical power supply temporarily fail (saved in the memory for up to 2 days). Rain Sensor connection possible.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8107		29,5 x 24,5 x 9,5	29,5 x 24,5 x 9,5	0,007	1,53		8 000625 081073

RAIN SENSOR



Suitable for all watering systems, the rain sensor avoids unnecessary wastage of water by turning the sprinklers off when it is raining. When the internal flow reaches a level of 5 mm of rain per square metre, the system shuts down. Programmed watering automatically resumes when the water in the sensor evaporates. The rain sensor should be installed in an outdoor area exposed to rain using the stainless steel bracket provided.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90916	\bigcirc 1	19 x 10 x 13	19 x 10 x 13	0,002	0,21	



24 V - 1" FEMALE SOLENOID VALVE

7090938



Solenoid with silt filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" female inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control.
Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min.

Operating temperature range +5° to +70°.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90938	12		28 x 19 x 25	0,013	4,54		8 000625 909384

24 V - 1" MALE SOLENOID VALVE

7090939



Solenoid with silt filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" male inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/ min. Operating temperature range $+5^{\circ}$ to $+70^{\circ}$.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90939	12		28 x 19 x 25	0,013	4,36		8 000625 909391

9 V - 1" FEMALE SOLENOID VALVE





Solenoid with silt filter. Works with the Multipla 9 V timer (cod. 8060) or with the 9 V control unit (cod. 90821). With 1" female inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90941	12		28 x 19 x 25	0,013	4,54		8 000625 909414

9 V - 1" MALE SOLENOID VALVE

7090940



Solenoid with silt filter. Works with the Multipla 9 V timer (cod. 8060) or with the 9 V control unit (cod. 90821). With 1" male inlet and outlet thread.

Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control.

Operating pressure from 0,5 to 12 bar.

Flow rate from 4,6 to 96 l/min. Operating temperature range $+5^{\circ}$ to $+70^{\circ}$.

code	packaging q	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90940		12		28 x 19 x 25	0,013	4,36		8 000625 909407

24 V AC SOLENOID WITH WIRES



Spare solenoid with wires, 24 V or bistable 9 V model.

9 V DC SOLENOID WITH WIRES

7090942



	pcs/pallet	weight (kg)	volume (m³)	box size (cm)	pack size (cm)	aging qty	code	
8 000625 909438		0,12				1	90943	
8 000625 909421		0,12				1	90942	

CONTROL UNIT

708188



From a field station, the unit will pilot the opening and closing movements of one or two 9V bistable solenoid valves installed in valve boxes.

Connected to a RAIN SENSOR (CODE 90915), the unit will suspend watering operations in the event of rainfall greater than 5 mm per square metre.

The control unit can be wall-mounted, using a special bracket, for ease of programming and practical

maintenance.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8188	6		30 x 14 x 25	0,01	2,84		8 000625 081882

FARM CONTROL UNIT





This unit manages remote opening/closing of a 9V bistable solenoid valve located in a valve box. A special bracket enables the wall-mounting of the control unit, for ease of programming and maintenance. It is powered by a 9V battery.

Annual programming (365 days). Duration of irrigation: from 1 minute to 23 hours and 59 minutes, one irrigation cycle per day. Manual opening/closing function which can be modified, as can the irrigation time.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8191	6		30 x 14 x 25	0,01	2,69		8 000625 081912

1"F. PROGRAMMABLE **SOLENOID VALVE** 7090928



Can be installed directly on the tap or water well outlet. Protected by 100% sealed cover operates also in total submersion. Easy to program with three keys only. Irrigation time from 1 min to 23 h. 59 min.

With option of up to 6 irrigation cycles per day.

Manual and weekly programming with exclusion of specific weekdays as required. Bistable 9 V solenoid with low power consumption. Operates with a 9 V battery, sufficient for an entire season. Electronic section separable from hydraulic section for easy programming or storage during winter. Operating pressure from 0,5 to 12 bar. 1" female inlet and outlet thread.

Flow rate from 4,6 to 96 l/min. Operating temperature range $+5^{\circ}$ to $+70^{\circ}$.



box size (cm) weight (kg) pcs/pallet code packaging gty pack size (cm) volume (m³) 8 000625 909285 30 x 16 x 25 90928 0,012 4,42

ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 2

7090000





A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (6 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Height from ground 2" (5 cm).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90000	100		27 x 25 x 24	0,016	5,02		8 000625 900008

ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 2'

7090001





A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (10 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Height from ground 2" (5 cm).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90001	100		27 x 25 x 24	0,016	4,98		8 000625 900015

ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 4'





A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (6 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Ground height of 4" (10 cm).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90015	50		27 x 19 x 24	0,012	3,30		8 000625 900152

ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 4

7090016



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (10 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Ground height of 4" (10 cm).

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90016	50		27 x 19 x 24	0,012	3,30		8 000625 900169

SPRINKLER BODY

7090142



90142 2" - 5 cm 90143 3" - 7,5 cm 90144 4" - 10 cm

code 90142	packaging qty 100	pack size (cm)	box size (cm) 27 x 25 x 24	volume (m³) 0,016	weight (kg) 4,53	pcs/pallet	8 000625 901425
90143	50		27 x 16 x 24	0,010	2,70		8 000625 901432
90144	50		27 x 19 x 24	0,012	3,07		8 000625 901449

360° 6L/MIN HEAD

7090040





Made of shock-resistant ABS plastic. Filter with support provided. Compatible with other brand sprinklers. Bag of 25 pcs.

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90040	(X)	25	18,5 x 9,5 x 12,5	0,002	0,26		8 000625 900404

HEAD FOR STATIC SPRINKLERS 10 L/MIN

709014660°





Made of shock-resistant ABS plastic. Filter with support provided. Compatible with other brand sprinklers. Bag of 25 pcs.

7090147/80°







code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90146	\bigcirc	1 x 25		18,5 x 9,5 x 12,5	0,002	0,25		8 000625 901463
90147	\Diamond	1 x 25		18,5 x 9,5 x 12,5	0,002	0,25		8 000625 901470
90148		1 x 25		18,5 x 9,5 x 12,5	0,002	0,26		8 000625 901487

360° HEAD

7090048







code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90048		1 x 25		18,5 x 9,5 x 12,5	0,002	0,25		8 000625 900480

0°-350° ADJUSTABLE HEAD 70900036 L/MIN





Made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Bag of 25 pcs.

70901450 L/MIN







code 90003	packaging	qty 1 x 25	pack size (cm)	box size (cm) 18,5 x 9,5 x 12,5	volume (m³) 0,002	weight (kg) 0,25	pcs/pallet	8 000625 900039
90145		1 x 25		18,5 x 9,5 x 12,5	0,002	0,25		8 000625 901456
90011		1 x 25		18,5 x 9,5 x 12,5	0,002	0,24		8 000625 900114

LONG-JET TURBINE **SPRINKLER**

7090154



Long range jet rotating sprinkler with interchangeable nozzles. Adjustable from 30° to 360° without extraction of the mechanism. Slits for eliminating any sand in the water. Removable internal filter. Silent operation due to internal lubrication. Height from ground 5" (12,5 cm). 3/4" female threaded base. Adjusting spanner supplied. Comes in pack of 20 pcs. Irrigated area max 670 m².



weight (kg) pcs/pallet code pack size (cm) box size (cm) volume (m³) packaging qty 8 000625 901548 90154 34 x 20 x 34 0.023 7,09

30°-360°			r	99	30°-360°			r	<u></u>	30°-360°			r	
BAR		I/min			BAR		l/min			BAR		l/min		
1	0,5 0,75 1 2 2,5 3 4 6	1,5 2,2 3,5 7,9 8,4 11,4 13,6 19,8 25,8	r 8,5 m r 9,6 m r 9,0 m r 11,4 m r 10,2 m r 10,4 m r 12,1 m r 13,3 m r 11,8 m	12,0 m 13,6 m 12,7 m 16,1 m 14,4 m 14,7 m 17,1 m 18,8 m 16,7 m	2	0,5 0,75 1 2 2,5 3 4 6	1,7 2,6 4,2 8,7 9,5 12,9 15,5 22,0 28,4	r 9,1 m r 9,8 m r 9,1 m r 11,6 m r 10,7 m r 10,7 m r 12,8 m r 14,0 m r 12,8 m	12,9 m 13,9 m 12,9 m 16,4 m 15,1 m 15,1 m 18,1 m 19,8 m 18,1 m	3	0,5 0,75 1 2 2,5 3 4 6	1,9 3,0 4,9 9,5 10,6 14,4 17,4 24,2 31,0	r8,8 m r9,8 m r9,8 m r11,6 m r11,0 m r11,0 m r13,4 m r14,6 m r13,7 m	12,4 m 13,9 m 13,9 m 16,4 m 15,6 m 15,6 m 19,0 m 20,6 m 19,4 m

MEDIUM-JET TURBINE SPRINKLER

7090152



Medium-jet turbine sprinklers with interchangeable nozzles.

A working range that can be adjusted from 40° to 360°, with just a simple cross-head screwdriver, a pointer on the lid showing the selected work arc.

The sprinkler can be regulated before installation, after installation in a static position, or during operation. A special mechanism avoids damage to the gears during regulation. Internal removable filter. Running pressure from 1.5 to 4 bars. Radius from 4 to 9 m. 1/2" screw base.

Height from ground 4" (10 cm).

Packs of 25 pcs. Irrigated area max 254 m².



code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg) pcs/p	
90152	25		28 x 19 x 25	0,013	3,93	8 000625 901524



40°-360°			r	<u></u>	40°-360°			r		40°-360°			r	t (S)
BAR		l/min			BAR		l/min			BAR		l/min		
	0,75	2,7	r 4,8 m	6,8 m		0,75	2,8	r 5,0 m	7,1 m		0,75	3,1	r 5,2 m	7,4 m
	1	4,4	r 5,8 m	8,2 m		1	4,8	r 5,9 m	8,3 m	_	1	5,8	r 6,3 m	8,9 m
1	1,5	4,5	r 6,7 m	9,5 m)	1,5	5,1	r 6,9 m	9,8 m	3	1,5	6,7	r 7,2 m	10,2 m
' '	2	6,0	r7,2 m	10,2 m	_	2	6,6	r 7,5 m	10,6 m	9	2	8,3	r 8,1 m	11,5 m
	3	9,4	r 8,0 m	11,3 m		3	10,0	r 8,4 m	11,9 m		3	11,8	r 9,0 m	12,7 m

MERCHANDISING

With Claber, it is easy to turn any shop into a specialist irrigation centre.

Claber enlarges its range of display boxes with the the new targeted display solutions for Claber water timers as well as for drip irrigation kits and the new Happy Fresh cooling systems.



MULTI BOX

709447



NEW FOR 2023



Multi Box is the most versatile and immediate solution for "out of gondola unit" display use. Made from strong cardboard, contained in a compact pack and easy to assembly, it consists of a base and a number of stackable containers, ready to hold most Claber products.

Stand measurements: 55 x 40 x 140 cm

pack size (cm) code packaging qty 1 40 x 100 x 9 709447 box size (cm) volume (m3) weight (kg) 40 x 100 x 9 0,036 4,80

VISUAL BOX

9449



NEW FOR 2023



The new floor-stand display Visual Box has three large clear PVC drawers, each one divided into two compartments, to double your options when it comes to displaying Claber products effectively: from connectors to couplings, and spray nozzles to pistols and

The stand is pre-assembled and ready to use right away.

Stand measurements: 40 x 39 x 150 cm

code packaging qty pack size (cm) 9449 1 40 x 39 x 120 box size (cm) volume (m3) weight (kg) 40 x 39 x 120 0.190 5,40

ESPO PROMO MONOFACE

9454



NEW FOR 2023



Display stand specifically for off-gondola promotion of blister packs, including small items.
High visibility of product.
Solid hardboard back. Hook positioning flexible and customizable. Supplied with hooks. Easy to assemble. Small pack size.

Stand measurements: 57 x 38 x 184 cm

code pack size (cm) packaging qty 9454 59 x 39 x 98 box size (cm) volume (m3) weight (kg) 7,00 59 x 39 x 98 0,225

ESPO AQUAUNO 709548





This is a specific "off-gondola" stand for displaying the water timers of the Aquauno, Aquauno Plus and Aquadue Duplo Evolution range Made entirely of cardboard and supplied empty and unassembled in a compact package, Espo Aquauno is very easy to put up and ready to use immediately. Printed in four colours, it features coordinated graphics and two interchangeable crowners; one dedicated to the new Aquauno Mist timer (code 8496), the other suitable for all the other Claber timers.

Three different filling options:

- Aquauno timers: 30 pcs (3 x 10 pcs)
- Aquauno Plus timers: 24 pcs (3 x 8 pcs)
 Aquadue Duplo timer: 24 pcs (3 x 8 pcs)

Stand measurements: 32 x 38,5 x 133 cm

code	packaging qt	ty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)
9548	$ \bigcirc $ 1	1	87 x 76 x 5	87 x 76 x 5	0,030	3,80

ESPO KIT 709549

One "off-gondola" stand suitable for displaying Claber drip irrigation kits, Aqua- Magic Systems and the new Happy Fresh cooling system kits.

Made entirely of cardboard and supplied empty and unassembled in a compact package, Espo Kit is very easy to put up and ready to use immediately. Printed in four colours, it features coordinated graphics and three interchangeable crowners: one dedicated to drip irrigation kits, one for Aqua-Magic System and another for the Happy Fresh cooling system.



- 8063: 10 pcs (2 x 5 pcs)
- 90751: 16 pcs (2 x 8 pcs) 90752: 10 pcs (2 x 5 pcs)
- 90753: 10 pcs (2 x 5 pcs)
- 90763: 10 pcs (2 x 5 pcs)
- 90766: 10 pcs (2 x 5 pcs)
- 90764: 16 pcs (2 x 5 pcs) 90764: 16 pcs (2 x 8 pcs)

Stand measurements: 32 x 38,5 x 133 cm

code	packaging qt	y	pack size (cm)	box size (cm)	volume (m³)	weight (kg)
9549	$ \bigcirc $ 1		87 x 76 x 5	87 x 76 x 5	0,030	3,60

ESPO TOP-LIGHT 709556







New stand to display Top-Light, Claber's new light hoses, off the counter. Made entirely of cardboard and supplied empty and unassembled in a compact package, Espo Top-Light is very easy to put up and ready to use immediately. Printed in four colours, it features coordinated graphics and clear information, for effective communication of the main benefits of the product directly at the sales point. QR code that refers back to dedicated site www.top-light.it.

Three different filling options:

- Top-Light 10 m 9340: 32 pcs
 Top-Light 15 m 9341: 24 pcs
 Top-Light 25 m 9342: 12 pcs

Stand measurements: 60 x 40 x 116 cm

code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)
9556		75 x 110 x 10	75 x 110 x 10	0,08	5

DISPLAY BOX (3 PCS.)

708849





Claber's new display unit-dispensers for loose products allow a tidy, linear presentation of store shelf and rack references.

Stand measurements: 37 x 20 x 35 cm


code	packaging qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)
8849	1	60 x 55 x 2,5	60 x 55 x 2,5	0,008	1,50

CLABER GUIDE 709485



SHOPPER 709106



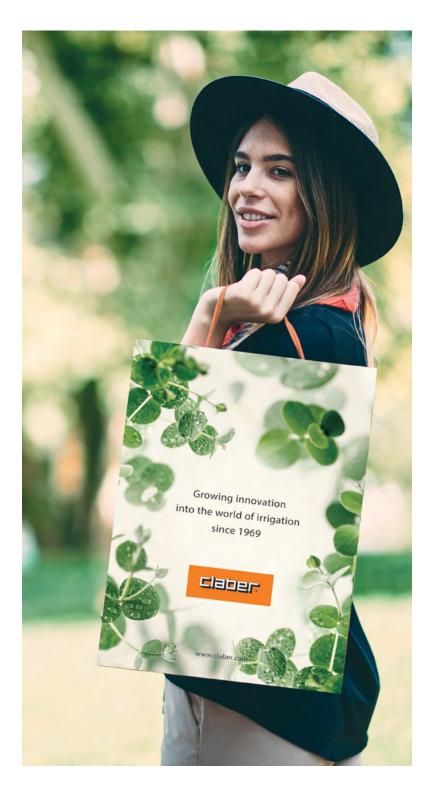

SALES POINTS: THE CLABER AISLE NEVER GOES UNNOTICED

In stores, on the aisles devoted to gardening, Claber products catch the attention and are easy to recognise at a glance.

Pleasing colours and graphics full of impact distinguish between the three ranges dedicated to drip, above-ground and underground irrigation. The arrangement of the products and the design of the packaging direct the consumer to choose the correct product and help create a system that's a perfect size for their requirements. An additional bonus that starts in store is a space that's beautiful to look at and easy to manage.



ABOVE-GROUND IRRIGATION



DRIP IRRIGATION



UNDERGROUND IRRIGATION



ABOVE-GROUND, DRIP, UNDERGROUND, CLABER PANELS

Dimensions: 100x40 cm

PUB0090940000

ABOVE-GROUND INFORMATIVE PANEL



709094

PUB0092000000

DRIP INFORMATIVE PANEL



709200

PUB0092010000

UNDERGROUND INFORMATIVE PANEL



709201

PUB0095470000

CLABER PANEL



PUB0092020000

ABOVE-GROUND PANEL



PUB0092030000

DRIP PANEL



PUB0092040000

UNDERGROUND PANEL



c 1	5 :::		01	Code	
Code	Description	Page	Qty	Code	
8022	AQUA-HOME 4-6-8	139	1	8565	UNIVERSAL MEN
8052	IDRIS SPIKE	125	12	8566	
8054	OASIS EVOLUTION	126	1	8567	
8058	MULTIPLA AC 230/24 V LCD	138	1	8568	
8059	SPARE DRIPPERS	126	10	8569	
8060	MULTIPLA DC 9 V LCD	138	1	8580	4 OUTLETS DISTI
8061	AQUA-MAGIC TANK	123	1	8581	4 OUTLETS DISTI
8062	AQUALUX SYSTEM	127	1	8583	KOALA QUICK-C
8063	AQUA-MAGIC SYSTEM	123	1	8587	3/4" QUICK-FIT T
8064	SPARE DRIPPERS	123	10	8589	3/4" MALE THREA
8068	10 m HOSE 1/4" 4-6 mm	123	4	8590	3/4" MALE THREA
8410	AQUADUE DUPLO EVOLUTION	91	2	8591	MULTI THREADE
8412	AQUAUNO VIDEO-2 PLUS	90	2	8592	1"-3/4" ANGLED
8413	AQUAUNO VIDEO-6 PLUS	90	2	8595	MULTI THREADE
8419	AQUAUNO LOGICA PLUS	90	2	8597	3/4"TAP CONNE
8422	AQUAUNO LOGICA	88	2	8598	DOUBLE TAP CO
8423	AQUAUNO SELECT	89	2	8599	DOUBLE TAP CO
8425	AQUAUNO PRATICO	88	2	8601	COUPLING WITH
8428	AQUAUNO VIDEO-2	89	2	8602	1/2" AUTOMATIC
8480	RF RAIN SENSOR INTERFACE	93	2	8603	1/2" AUTOMATIC
8483	TEMPO LOGIC	92	2	8604	3/4" AUTOMATIC
8485	DUAL LOGIC	93	2	8605	3/4" AUTOMATIC
8486	TEMPO SELECT	92	2	8606	1/2" AUTOMATIC
8487	TEMPO HYBRID	92	2	8607	1/2" AUTOMATIC
8488	DUAL SELECT	93	2	8608	
8496	AQUAUNO MIST	67/89	2	8609	3/4" AUTOMATIC
8509	1"F 3/4" M. ADAPTER	15	12	8611	
8525	SMOOTH TAP CONNECTOR	17	10	8612	
8534	PRO SPRAY NOZZLE	29	15	8613	
8535	PRO SPRAY NOZZLE	29	5	8614	
8536	PLUS SPRAY NOZZLE	29	15	8615	
8537	PLUS SPRAY NOZZLE	29	5	8616	
8538	ERGO SPRAY PISTOL	26	15	8617	
8539 8541	ERGO SPRAY PISTOL ERGO SHOWER PISTOL	26 27	10 4	8618 8619	
8542	COUPLING 1/2"-5/8"	23	50	8620	
8543	COUPLING 1/2"-5/8"	23	12	8621	
8544	COUPLING 1/2"-5/8"W/AQUASTOP	23	25	8622	
8545	COUPLING 1/2"-5/8"W/AQUASTOP	23	12	8623	
8546	UNIV. COUPLING 1/2"-5/8"-3/4"	23	40	8626	
8547	UNIV. COUPLING 1/2"-5/8"-3/4"	23	10	8627	
8548	UNIV COUPLING 1/2"-5/8"-3/4"W/AQUASTOP	23	20	8628	
8549	UNIV COUPLING 1/2"-5/8"-3/4" W/AQUASTOP	23	10	8629	
8551	STARTER SET 1/2"	26	6	8636	
8556	TAP CONNECTOR 1/2"-3/4"	22	50	8637	SPRINKLER CON
8557	TAP CONNECTOR 1/2"-3/4"	22	12	8654	MULTIFUNCTION
8558	TAP CONNECTOR 3/4" - 1"	22	40	8656	ROLLINA
8559	TAP CONNECTOR 3/4" - 1"	22	10	8658	TURBOSPRUZZO
8560	MENDER 1/2"	22	30	8660	TURBOSPIKE
8561	MENDER 1/2"	22	12	8661	SPIKE-JET
8562	MENDER 5/8" HOSE	18	30	8662	VARIO-JET
8563	MENDER 5/8" HOSE	18	10	8663	SPRAY-JET
8564	UNIVERSAL MENDER 1/2"-5/8"-3/4"	22	40	8675	IDROSPRAY 2000

Code	Description	Page	Qty
8565	UNIVERSAL MENDER 1/2"-5/8"-3/4"	22	10
8566	5/8" AUTOMATIC COUPLING W / AQUASTOP	21	50
8567	5/8" AUTOMATIC COUPLING W / AQUASTOP	21	12
8568	5/8" AUTOMATIC COUPLING	20	50
8569	5/8" AUTOMATIC COUPLING	20	12
8580	4 OUTLETS DISTRIBUTOR	15	8
8581	4 OUTLETS DISTRIBUTOR	15	5
8583	KOALA QUICK-CLICK	17	8
8587 8589	3/4" QUICK-FIT TAP CONNECTOR 3/4" MALE THREADED TWO-WAY ADAPTER	17 15	10 5
8590	3/4" MALE THREADED TWO-WAY ADAPTER	15	8
8591	MULTI THREADED TAP CONNECTOR 1/2" - 3/4"	14	100
8592	1"-3/4" ANGLED TAP CONNECTOR	17	8
8595	MULTI THREADED TAP CONNECTOR 1" - 3/4"	15	40
8597	3/4"TAP CONNECTOR METAL	17	14
8598	DOUBLE TAP CONNECTOR	15	25
8599	DOUBLE TAP CONNECTOR	15	8
8601	COUPLING WITH SHUT-OFF VALVE	20	8
8602	1/2" AUTOMATIC COUPLING W / AOUASTOP	21	50
8603	1/2" AUTOMATIC COUPLING W / AOUASTOP	21	14
8604	3/4" AUTOMATIC COUPLING W / AOUASTOP	21	50
8605	3/4" AUTOMATIC COUPLING W / AQUASTOP	21	12
8606	1/2" AUTOMATIC COUPLING	20	50
8607	1/2" AUTOMATIC COUPLING	20	14
8608	3/4" AUTOMATIC COUPLING	20	50
8609	3/4" AUTOMATIC COUPLING	20	12
8611	CONNECTOR WITH SHUT-OFF VALVE	19	8
8612	TWO-WAY CONNECTOR	19	100
8613	TWO-WAY CONNECTOR	19	14
8614	THREE-WAY CONNECTOR	19	40
8615	THREE-WAY CONNECTOR	19	12
8616	JET SPRAY NOZZLE	29	50
8617	JET SPRAY NOZZLE	29	8
8618	MENDER 1/2" HOSE	18	50
8619	MENDER 1/2" HOSE	18	14
8620	MENDER 3/4" HOSE	18	50
8621	MENDER 3/4" HOSE	18	10
8622	1/2"THREADED TAP CONNECTOR	14	50
8623	1/2"THREADED TAP CONNECTOR	14	14
8626	3/4"THREADED TAP CONNECTOR	14	100
8627 8628	3/4"THREADED TAP CONNECTOR 1"THREADED TAP CONNECTOR	14	14
8629	1"THREADED TAP CONNECTOR	14	12
8636	SPRINKLER CONNECTOR 3/4" M.	19	50
8637	SPRINKLER CONNECTOR 3/4" M.	19	14
8654	MULTIFUNCTION SPRINKLER	44	3
8656	ROLLINA	44	5
8658	TURBOSPRUZZO	44	6
8660	TURBOSPIKE	44	12
8661	SPIKE-JET	46	5
8662	VARIO-JET	46	5
8663	SPRAY-JET	46	5
8675	IDROSPRAY 2000	45	2

Code	Description	Page	Qty
8685	AQUALUX 2000	45	4
8690	ROTOROLL EVOLUTION FLOOR STAND	61	1
8692	ROTOROLL EVOLUTION 10 m NEW	61	1
8694	IDROJET 2000	45	4
8696	ROTOROLL EVOLUTION 20 m	61	1
8697	ROTOROLL EVOLUTION 30 m	61	1
8705	3/4" IMPACT FEMALE HEAD	46	5
8707	IMPACT ON STAKE	47	5
8708	IMPACT PLASTIC SPIKE	47	5
8709	IMPACTTRIPOD	47	4
8711	WALL BRACKETS	51	10
8713	BAG CLAMPS	64	10
8715	IMPACT TRIPOD KIT	47	2
8740	COMPACT-160 PROMO	43	4
8743	COMPACT-16 SUPER METAL	43	3
8748	COMPACT 22 A QUA CONTROL	43	3
8753	COMPACT-20 AQUA CONTROL	43	3
8756	SPRAY PISTOL	26	5
8757	WASHING PISTOL	65	12
8774	WIPPY CAR NOZZLE AND COUPLING SET	65	10
8800 8802	STARTER SET 1/2"	29	10
8803		29	12
8804	MULTI THREADED TAP CONNECTOR 1" - 3/4" MULTI THREADED TAP CONNECTOR 1/2" - 3/4"	15 14	14
8811	O-RING AND WASHER SET	19	15
8813	TAP CONNECTOR AND 1/2" COUPLING SET	21	10
8818	1/2" HOSE CONNECTION SET	21	8
8827	STARTER SET 3/4"	29	8
8841	WIPPY TURBO	65	2
8843	WIPPY AUTO	65	2
8845	1/2" SILVER ELEGANT PLUS HOSE KIT 15 m	73	1
8849	DISPLAY BOX (3 PCS.)	181	1
8856	5/8" SILVER ELEGANT PLUS HOSE KIT 15 m	73	1
8858	GENIUS COMPACT PRONTO 25	57	12
8862	GENIUS 60	55	1
8864	KIT PRONTO 30	55	1
8865	METAL JUNIOR PRONTO AQUAVIVA 25 NEW	57	12
8866	ECO 0	50	8
8872	GENIUS 100	55	1
8884	AQUAPONY KIT	51	1
8887	AQUAPONY	51	1
8890	METAL 40	58	1
8891	METAL 60	58	1
8894	METAL GEMINI	59	1
8895	METAL PROFY	59	1
8900	JUMBO	59	1
8904	SET OF 10 CLABER BAGS	64	10
8906	METAL COMPACT PRONTO 25	57	6
8917	FAN SPRAY	27	4
8921	KIROS	51	1
8922	LONG FAN SPRAY	27	2
8924	QUBO PRONTO 25	56	8
8933	QUBO PRONTO AQUAVIVA 20 NEW	56	8

Code	Description	Page	Qty
	CARRYCARTEGO		
8934	CARRY CART ECO	64	1
8936	QUBO PRONTO TOP-LIGHT 20		8
8945	KIROS KIT	51	1
8956 8962	MALIBÙ	65	3 12
8966	EXTENSION SPRAY PISTOL	53 26	16
8974	SET AQUAPASS	51	10
8977	SILVER-AL	53	1
8980	ECOSEI	52	1
8981	ECOSEI KIT	52	1
8985	GENIUS COMPACT PRONTO AQUAVIVA 20 NEV	+	12
9003	AQUAVIVA PLUS Ø 1/2" m 15	74	1
9004	AQUAVIVA PLUS Ø 1/2" m 25	74	1
9005	AOUAVIVA PLUS Ø 5/8" m 15	74	1
9006	AOUAVIVA PLUS Ø 5/8" m 25	74	1
9008	AQUAVIVA PLUS Ø 3/4" m 25	74	1
9025	9 - 13 mm COUPLING	20/83	10
9026	9 - 13 mm COUPLING W / AQUASTOP NEV	21/83	10
9028	MINI-SET UTILITY NEV	50	1
9031	MINI-SET BALCONY	50	1
9032	MINI-SET GARDEN	50	1
9034	SPIRAL KIT BASIC m 10	83	6
9036	TOP-BLACK Ø 1/2" 12 -17 mm m 50	69	1
9037	TOP-BLACK Ø 1/2" 12 -17 mm m 15	69	1
9040	TOP-BLACK Ø 5/8" 14 -19 mm m 15	69	1
9043	TOP-BLACK Ø 5/8" 14 -19 mm m 50	69	1
9045	TOP-BLACK Ø 3/4" 19 - 25 mm m 50	69	1
9046	TOP-BLACK Ø 1" 25 - 33 mm m 50	69	1
9048	TOP-BLACK Ø 3/4" (19-25 mm) m 25	69	1
9053	STARTER GARDEN-SET	83	1
9060	SILVER GREEN PLUS m 25 Ø 1/2"	70	1
9061	SILVER GREEN PLUS m 50 Ø 1/2"	70	1
9062	SILVER GREEN PLUS m 25 Ø 5/8"	70	1
9063	SILVER GREEN PLUS m 25 Ø 3/4"	70	1
9064	TOP-BLACK Ø 1/2" (12,5 mm) m 25	+	1
9065	TOP-BLACK Ø 5/8" (15 mm) m 25	_	1
9081	ELEGANT DUAL JET PISTOL ELEGANT SHOWER PISTOL	28	4
9082	ELEGANT MULTIFUNCTION PISTOL	28	4
9086	ELEGANT TELESCOPIC MULTIFUNCTION LANCE	28	2
9088	ELEGANT MULTIFUNCTION PISTOL 5 JETS NEV		4
9089	ELEGANT MULTIFUNCTION NOZZLE 5 JETS NEV		6
9106	SHOPPER	181	
9120	AQUAVIVA PLUS Ø 1/2" m 10	74	1
9123	SILVER ELEGANT PLUS Ø 1/2" m 15	72	1
9124	SILVER ELEGANT PLUS Ø 1/2" m 25	72	1
9125	SILVER ELEGANT PLUS Ø 5/8" m 20	72	1
9126	SILVER ELEGANT PLUS Ø 5/8" m 25	72	1
9127	SILVER ELEGANT PLUS Ø 5/8" m 50	72	1
9128	SILVER ELEGANT PLUS Ø 3/4" m 25	72	1
9129	SILVER ELEGANT PLUS Ø 3/4" m 50	72	1
9131	FLEXYFORT GREEN Ø 1/2" m 15	71	1
9133	FLEXYFORT GREEN Ø 1/2" m 50	71	1

Code	Description	Page	Qty
9136	FLEXYFORT GREEN Ø 5/8" m 50	71	1
9138	FLEXYFORT GREEN Ø 3/4" m 50	71	1
9140	FLEXYFORT GREEN Ø 1" m 50	71	1
9141	FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 25 NEW	71	1
9142	FLEXYFORT GREEN Ø 5/8" (15 mm) m 15 NEW	71	1
9145	FLEXYFORT GREEN Ø 5/8" (15 mm) m 25 NEW	71	1
9149	FLEXYFORT GREEN Ø 3/4" (19 mm) m 25 NEW	71	1
9150	FLEXYFORT GREEN Ø 1" (25 mm) m 25 NEW	71	1
9334	SPRINGY 15 M	79	6
9335	SPRINGY 25 M	79	4
9338	SPIRAL KIT PLUS 15 m	83	3
9340	TOP-LIGHT Ø 1/2" 10 m	81	1
9341	TOP-LIGHT Ø 1/2" 15 m	81	1
9342	TOP-LIGHT Ø 1/2" 25 m	81	1
9357	TOP-LIGHT Ø 3/4" 15 m	81	1
9358	TOP-LIGHT Ø 3/4" 25 m	81	1
9373	SPRAY PISTOL GARDEN	27	5
9391	ERGO-GARDEN SPRAY PISTOL	27	8
9447	MULTI BOX NEW	179	1
9449	VISUAL BOX NEW	179	1
9454	ESPO PROMO MONOFACE NEW	179	1
9485	CLABER GUIDE	181	
9548	ESPO AQUAUNO	180	1
9549	ESPO KIT	180	1
9556	ESPO TOP-LIGHT	180	1
9561	PRECISION CONFORT	25	3
9563	MULTI-JET CONFORT	25	3
9565	BALCONY CONFORT	25	3
9567	METAL-JET CONFORT	25	3
9601	3/4" M THREADED ADJUSTABLE TWO-WAY ADAPTER	37	4
9602	ADJUSTABLE TWO-WAY TAP CONNECTOR	37	4
9603	1"TAP CONNECTOR WITH 3/4" ADAPTER	37	10
9604	3/4"TAP CONNECTOR	37	10
9605	1/2" (15 - 21 mm) TAP CONNECTOR	37	10
9606	TWO-WAY CONNECTOR	38	10
9607	THREE-WAY CONNECTOR	38	8
9608	1/2" M (15 - 21 mm) CONNECTOR	38	10
9609	3/4" M (20 - 27 mm) CONNECTOR	38	10
9610	1/2"-5/8" AUTOMATIC COUPLING	39	8
9611	1/2"-5/8" AUTOMATIC COUPLING W/STOP	39	8
9612	1/2"-5/8" MENDER	39	8
9613	3/4" AUTOMATIC COUPLING	39	8
9614	3/4" AUTOMATIC COUPLING W/STOP	39	8
9615	3/4" MENDER	39	8
9619	BASIC METAL PISTOL	40	5
9620	SPRAY NOZZLE WITH ADJUSTABLE JET	40	8
9621	SPRAY PISTOL	40	4
9622	8 PATTERNS MULTIFUNCTION PISTOL	40	4
9623	IMPACT METAL-JET SPIKE	41	3
9641	1" - 3/4" MAX-FLOW TAP CONNECTOR	31	8
9642	3/4" M THREADED MAX-FLOW ADAPTOR	31	10
9643	2-WAY MAX-FLOW CONNECTOR	32	10
9644	2-WAY CONNECTOR MAX-FLOW TO STANDARD	32	10

Code	Description	Page	Qty
0645	MAY FLOW CONNECTOR		10
9645	MAX-FLOW CONNECTOR	32	10
9646	CONNECTOR MAX-FLOW TO STANDARD	32	10
9647	3/4" MAX-FLOW COUPLING	33	8
9648	3/4" MAX-FLOW MENDER	33	8
9649	3/4" - 1" MAX-FLOW MENDER	33	6
9650 9651	1" MAX-FLOW COUPLING 1" MAX-FLOW MENDER	33	6
9652	MAX-FLOW MENDER MAX-FLOW ADJUSTABLE NOZZLE	33	6
9653	1-1/4" - 1"THREADED ADAPTOR	34	6
9654	4"14 144 7 51 014 4 5 4 5 7 0 5	31 w 31	6 10
9655	Alla IA Allahay FLOWTAR CONNECTOR	-	6
9657	1"1/4 - 1" MAX-FLOW TAP CONNECTOR NE MAX-FLOW O-RING AND WASHERS SET NE		10
90004	0-350°-2" ADJUSTABLE POP-UP	147	24
90005	0-350°-2″ ADJUSTABLE POP-UP	147	24
90006	0-350°-3″ ADJUSTABLE POP-UP	147	24
90007	0-350° ADJUSTABLE HEAD	147	12
90019	ADJUSTABLE POP-UP 0°-350° 6 l/min - 4″	147	24
90019	ADJUSTABLE POP-UP 0°-350° 6 l/min - 2″	147	24
90041	360° JET POP-UP 2"	148	12
90043	360° JET POP-UP 4"	148	12
90044	360° HEAD	148	12
90053	180° JET POP-UP 2"	148	12
90055	180° JET POP-UP 4"	148	12
90056	180° HEAD	148	12
90095	90° JET POP-UP 2"	149	12
90097	90° JET POP-UP 4"	149	12
90098	90° HEAD	149	12
90109	CENTRE-STRIP POP-UP 4"	150	12
90110	CENTRE-STRIP HEAD	150	12
90121	END-STRIP POP-UP 4"	151	12
90122	END-STRIP HEAD	151	12
90123	SET OF SPARE POP-UP AND COLIBRÌ FILTERS	151	12
90124	SET OF POP-UP SPARE PARTS	151	12
90133	SQUARE AREA POP-UP- 4"	150	12
90134	SQUARE AREA HEAD	150	12
90200	COLIBRÌ STARTER KIT	136	1
90210	360° COLIBRI MICRO-SPRINKLER	135	12
90220	180° COLIBRI MICRO-SPRINKLER	135	12
90230	90° COLIBRI MICRO-SPRINKLER	135	12
90250	GUARD COLLAR	135	10
90264	TURBO-JET 80°-360° - 3"	137	12
90266	TURBO-JET 80°-360° - 4"	137	12
90270	ELBOW CONNECTOR Ø 32 mm	168	8
90271	COUPLING Ø 32 mm - 1"THREAD	168	20
90272	"T" Ø 32 mm CONNECTORS	168	5
90273	ELBOW Ø 32 mm - F. 3/4"THREAD	169	12
90274	CONNECTOR Ø 32 mm F. 3/4"THREAD	168	10
90275	COUPLING Ø 32 mm	168	12
90276	BRACKET COUPLING FOR Ø 32 mm HOSE	161	7×2
90277	END-OF-LINE PLUG Ø 32 mm	169	12
90279	Ø 25 mm - Ø 32 mm COUPLING 1" M THREADED CONNECTOR Ø 20 mm	169	12
90318		164	20
90319	1"F THREADED CONNECTOR Ø 20 mm	164	20

Code	Description	Page	Qty
90320	F. 3/4"- 1/2"THREADED CONNECTOR Ø 20 mm	164	20
90321	COUPLING Ø 20 mm	164	15
90322	ELBOW CONNECTOR Ø 20 mm	164	15
90323	T Ø 20 MM	164	10
90324	1/2" M THREADED ELBOW Ø 20 mm	165	20
90325	1/2" M THREADED T CONN.ECTOR Ø 20 mm	165	15
90326	3/4" F. THREADED ELBOW Ø 20 mm	165	20
90327	END-OF-LINE PLUG Ø 20 mm	165	20
90328	Ø 16 mm - Ø 20 mm COUPLING	165	20
90350	1/2" SOAKER HOSE 15 m	100	1
90351	1/2" SOAKER HOSE 25 m	100	1
90353	1/4" DRIPPER TUBE 15 m	98	5
90354	2,1 L/H SELF REGULATING DRIPPER TUBE 25 m	98	1
90355	DRIPPER TUBE 25 m	98	1
90356	DRIPPER TUBE 25 m BROWN	98	1
90357	DRIPPER TUBE 50 m	98	1
90362	MAIN TUBE 15 m	97	1
90365	MAIN TUBE 25 m	97	1
90366	MAIN TUBE 50 m	97	1
90368	MAIN TUBE 25 m WHITE	97	1
90370	FEEDING TUBE 20 m	96	5
90371	FEEDING TUBE 5 m	96	14
90372	PETUBE Ø 20 mm 15 m	163	1
90373	PETUBE Ø 20 mm 25 m	163	1
90374	CONNECTOR Ø 32 mm - F. 1"THREAD	168	12
90375	FEEDING TUBE 20 m GREEN	96	5
90376	7,5 m TRIPLE-PIERCED HOSE 15 m TRIPLE-PIERCED HOSE	101	3
90377	PE TUBE Ø 25 mm 25 m	163	1
90385	PE TUBE Ø 25 mm 50 m	163	1
90390	PE TUBE Ø 32 mm 25 m	163	1
	PE TUBE Ø 32 mm 50 m	163	1
90416	"T" Ø 32 mm 3/4" THREAD	169	5
	ELBOW CONNECTOR Ø 25 mm	166	7
90418	"T" Ø 25 mm 3/4" THREAD	167	6
90419	COUPLING Ø 25 mm	166	9
90420	COUPLING Ø 25 mm - 1"THREAD	166	15
90421	COUPLING Ø 25 mm - 3/4"THREAD	166	15
90422	"T" Ø 25 mm CONNECTORS	166	4
	ELBOW Ø 25 MM - F. 3/4"THREAD	167	12
90424	CONNECTOR Ø 25 mm - F. 3/4"THREAD	166	15
90425	END-OF-LINE PLUG Ø 25 mm	167	15
90426	ELBOW CONN. Ø 32 mm - F. 3/4"THREAD	169	8
90427	ELBOW CONN. Ø 25 mm - F. 1/2"THREAD	167	7
90428	Ø 20 mm - Ø 25 mm COUPLING	167	12
90450	BRACKET COUPLING FOR Ø 25 mm HOSE	161	8×2
90474	MEDIUM-JET TURBINE SPRINKLER	153	12
90478	LONG-JET TURBINE SPRINKLER	153	8
90480	MULTI-JET TURBINE WITH LONG JET RANGE	153	8
90500	CIRCULAR VALVE BOX	162	1
90510	RECTANGULAR VALVE BOX	162	1
90515	RECTANGULAR VALVE BOX	162	1
90524	CONNECTOR Ø 25 mm - F. 1"THREAD	166	10

Code	Description	Page	Qty
90701	$1^{\prime\prime}\text{M}$ (26-34 mm) x 3/4 $^{\prime\prime}\text{M}$ (20-27 mm) NIPPLE NEW	159	40
90702	$3/4^{\prime\prime}$ M (20-27 mm) x $3/4^{\prime\prime}$ M (20-27 mm) NIPPLE $$ NEW	159	40
90703	$3/4^{\prime\prime}$ M (20-27 mm) x 1/2" M (15-21 mm) NIPPLE $$ NEW	159	40
90704	$3/4^{\prime\prime}F$ (20-27 mm) x 1/2 $^{\prime\prime}F$ (15-21 mm) COUPLING $$ NEW	158	40
90705	1"F (26-34 mm) x 3/4"F (20-27 mm) COUPLING NEW	158	20
90706	3/4" F (20-27 mm) x 3/4" F (20-27 mm) COUPLING NEW	158	40
90707	1/2" F (15-21 mm) x 1/2" F (15-21 mm) COUPLING NEW	158	40
90708	1"F (26-34 mm) x 1"F (26-34 mm) COUPLING NEW	158	20
90709	3/4" F (20-27 mm) x 3/4" F (20-27 mm) ELBOW NEW	158	20
90710	1"F (26-34 mm) x 1"F (26-34 mm) ELBOW NEW	158	20
90711	1"F (26-34 mm) T CONNECTOR NEW	159	20
90712	3/4" F (20-27 mm) T CONNECTOR NEW	159	20
90713	3/4" (20-27 mm) M THREADED CAP NEW	159	40
90714	1/2" (15-21 mm) M THREADED CAP NEW	159	20
90715	1" (26-34 mm) M THREADED CAP NEW	159	40
90746	FLEXIBLE EXTENSION 3/4" - 1/2"	160	8
90747	FLEXIBLE EXTENSION 3/4" - 3/4"	160	8
90751	KIT HAPPY FRESH EVOLUTION 7,5 m	67	4
90752	KIT HAPPY FRESH EVOLUTION 12 m	67	1
90753	KIT HAPPY FRESH EVOLUTION 12 m KIT WITH MIST	67	1
90756	Ø 3/4"-1/2"THREADED EXTENSION	160	10×5
90757	Ø 1/2"-1/2"THREADED EXTENSION	160	10×5
90759	DRIP KIT PLUS 25 POTS	117	1
90763	TIMER KIT 20 PRATICO	118	1
90764	DRIP STARTER KIT	117	4
90765	Ø 3/4"-3/4"THREADED EXTENSION	160	10×5
90766	TIMER KIT 20 LOGICA	117	1
90767	ORTO DRIP KIT	116	1
90772	TERRAZZO DRIP KIT	118	1
90801	1/2" FEMALE THREADED CAP	157	20x2
90802	3/4" FEMALE THREADED CAP	157	20x2
90803	1"F. x 1"M. COUPLING	156	10
90804	1"MALE - 3/4" F. REDUCER	157	10×2
90805	1"M. x 1"M. NIPPLE	157	20
90807	1"F. x 1"M. ELBOW	156	10
90808	T 1"F. x 1"F. x 1"M. 9 V - 1"FEMALE SOLENOID VALVE	156	10
	9 V - 1" MALE SOLENOID VALVE	143	1
90813 90814	24V - 1" FEMALE SOLENOID VALVE	143 143	1
90814	24V - 1" MALE SOLENOID VALVE	143	1
90821	CONTROL UNIT	143	1
90821	1" F. PROGRAMMABLE SOLENOID VALVE	142	1
90829	HYDRO-4	141	1
90831	RAIN SENSOR RF	93/141	1
90858	BRACKET COUPLING FOR TUBE Ø 20 mm HOSE	161	10×2
90910	DRAINAGE VALVE	157	15×1
90915	RAIN SENSOR	91/139	2
90917	Ø 1"F MANUAL VALVE	161	5
90918	Ø 3/4" F MANUAL VALVE	161	5
90919	CIRCUIT FILTER	161	3
90920	THREADED DRAINAGE VALVE	107	4
90929	SPARE ROD FOR QUICK COUPLING VALVE INLET	162	5
90930	QUICK-CLICK STANDPIPE	162	4
	• • • • •		

Code	Description	Page	Qty
			ν,
91002	MULTI-THREAD TAP CONNECTOR 3/4" - 1/2"	102	14
91006	REPLACEMENT 3/4" F. CONNECTOR	91	10
91009	AUTOMATIC COUPLING	103	10
91011	IN-LINE FILTER FOR 1/2" HOSE	103	4
91013	1/2" HOSE THREADED ADAPTOR	103	14
91015	1/2" HOSE 3/4" - 1"THREADED COUPLING	103	10
91017	1/2" (15 - 21 mm) THREADED 3-WAY CONNECTOR	104	10
91019	1/2" (15-21 mm) THREADED ELBOW	104	12
91021	1/2"THREAD ELBOW CONNECTOR (15-21 mm)	104	6
91023	1/2" COUPLING	104	12
91025	1/2" ELBOW COUPLING	104	12
91027	1/2" CONNECTOR WITH 4 1/4" OUTLETS	105	4
91029	1/2"TEE	105	10
91031	IN-LINE FILTER FOR 1/2" HOSE	106	5
91033	SHUT-OFF VALVE	105	10
91035	END STOPPER	105	12
91037	THREADED DRAINAGE VALVE	105	5
91040	PRESSURE REDUCER	102	4
91045	DOUBLE TAP CONNECTOR	102	8
91066	1/2" HOSE 3/4" - 1"THREADED COUPLING	107	10
91071	1/2"TEE	108	15
91072	1/2" (15 - 21 mm) THREADED 3-WAY CONNECTOR	107	10
91073	1/2" - 1/4" 2-WAY COUPLING	108	10
91076	1/2"COUPLING	108	15
91081	1/2" ELBOW COUPLING	108	15
91082	1/2" (15-21 mm) THREADED ELBOW	107	10
91086	1/2" END STOPPER	108	15
91090	1/2" SUPPORT STAKE	109	10
91096	TUBE CLAMP	109	10
91097	WALL HOSE CLAMPS NEW	109	10
91141	1/4" 3-WAY COUPLING	110	13
91143	1/4" ELBOW	110	13
91145	1/4" 4-WAY COUPLING	110	13
91155	1/4" 2-WAY COUPLING	110	13
91170	HOLE PLUGS	110	13
91185	HOLE PUNCHER/SPANNER	111	10
91190	1/4" SUPPORT STAKE	111	10
91209	0-6 L/H END-OF-LINE DRIPPER	113	10
91211	0-6 L/H END-OF-LINE DRIPPER	113	10
91213	0-6 L/H END-OF-LINE DRIPPER	113	8
91214	0-10 L/H PLUS END-OF-LINE DRIPPER	113	10
91217		113	10
91218		113	10
91222	SELF-REGULATING DRIPPER	116	10
91223	SELF-REGULATING DRIPPER ON SPIKE	115	6
91225	0-40 L/H ADJUSTABLE DRIPPER	114	10
91227	0-40 L/H ADJUSTABLE DRIPPER	115	6
91228	0-40 L/H ADJUSTABLE SHRUBBLER	115	6
91229	360° MICRO MIST SPRAYER ON SPIKE	115	6
91232	ADJUSTABLE SHRUBBLER	114	10
91248	180° ADJUSTABLE MICRO-SPRINKLER	121	10
91249	360° ADJUSTABLE MICRO-SPRINKLER	121	10
91250	360° ADJUSTABLE MICRO-SPRINKLER	121	10

Code	Description	Page	Qty
91254	90° MICRO-SPRINKLER	120	10
91255	180° MICRO-SPRINKLER	120	10
91256	360° MICRO-SPRINKLER	120	10
91257	MICRO-SPRINKLER STRIP	120	10
91258	360° MICRO-MIST SPRAYER	120	10
91260	FITTED RIGID RISERS	121	10
91265	MICRO-SPRINKLER SUPPORT STAKE	121	8
91270	1/4" SHUT-OFF VALVE	111	10
91280	1/2" SHUT-OFF VALVE	109	10
91345	1/2" - 1/4" HOSE THREADED ADAPTOR	107	10
91347	1/2" HOSE THREADED ADAPTOR	107	10
91494	3/4" AUTOMATIC ADAPTOR	103	10
91589	3/4" MALE THREADED TWO-WAY ADAPTER	102	5
99009	AUTOMATIC COUPLING	103	25
99013	1/2" HOSE THREADED ADAPTOR	103	25
99015	1/2" HOSE 3/4" - 1"THREADED COUPLING	103	25
99017	1/2" (15-21 mm) THREADED 3-WAY CONNECTOR	104	25
99019	1/2" (15-21 mm) THREADED ELBOW	104	25
99021	1/2"THREAD ELBOW CONNECTOR (15-21 mm)	104	25
99023	1/2"COUPLING	104	25
99025	1/2" ELBOW COUPLING	104	25
99027	1/2" - CONNECTOR WITH 4 1/4" OUTLETS	105	25
99029	1/2"TEE	105	25
99033	SHUT-OFF VALVE	105	25
99035	END STOPPER	105	25
99071	1/2"TEE	108	4×20
99076	1/2"COUPLING	108	6×20
99081	1/2" ELBOW COUPLING	108	6×20
99090	1/2" SUPPORT STAKE	109	4×20
99155	1/4" 2-WAY COUPLING	110	20×20
99190	1/4" SUPPORT STAKE	111	10×40
99209	0-6 L/H END-OF-LINE DRIPPER	113	6×50
99217	0-6 L/H IN-LINE DRIPPER	113	6×50
99222	SELF-REGULATING DRIPPER	116	10×50
99225	0-40 L/H ADJUSTABLE DRIPPER	114	10×50
99228	0-40 L/H ADJUSTABLE SHRUBBLER	115	6×25
99232	ADJUSTABLE SHRUBBLER	114	10×50

Codo	Description	Dogo	Otre
Code	Description	Page	Qty
8017	METEOCOMETA 6	172	1
8107	METEOPRAGMA 12	172	1
8188	CONTROL UNIT	174	6
8191	FARM CONTROL UNIT	174	6
8321	RF UNIT	171	1
8323	1" M. RF PROGRAMMABLE SOLENOID VALVE	171	1
8347	RF REMOTE CONTROL 2 UNITS	171	1
8348	RF REMOTE CONTROL 6 UNITS	171	1
90000	ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 2"	175	100
90001	ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 2"	175	100
90003	0°-350° ADJUSTABLE HEAD 6 L/MIN	176	1x25
90011	0°-350° ADJUSTABLE HEAD 14 L/MIN	176	1x25
90015	ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 4"	175	50
90016	ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 4"	175	50
90040	360° 6L/Min HEAD	176	1x25
90048	360° HEAD	176	1x25
90142	SPRINKLER BODY 2"	175	100
90143	SPRINKLER BODY 3"	175	50
90144	SPRINKLER BODY 4"	175	50
90145	0°-350° ADJUSTABLE HEAD 10 L/MIN	176	1x25
90146	HEAD FOR STATIC SPRINKLERS 360° 10 L/MIN	176	1x25
90147	HEAD FOR STATIC SPRINKLERS 180° 10 L/MIN	176	1x25
90148	HEAD FOR STATIC SPRINKLERS 90° 10 L/MIN	176	1x25
90152	MEDIUM-JET TURBINE SPRINKLER	177	25
90154	LONG-JET TURBINE SPRINKLER	177	20
90839	HYDRO-4 RF	171	1
90916	RAIN SENSOR	172	1
90928	1"F. PROGRAMMABLE SOLENOID VALVE	174	6
90938	24 V - 1" FEMALE SOLENOID VALVE	173	12
90939	24 V - 1" MALE SOLENOID VALVE	173	12
90940	9 V - 1" MALE SOLENOID VALVE	173	12
90941	9 V - 1" FEMALE SOLENOID VALVE	173	12
	9 V DC SOLENOID WITH WIRES	173	1
90943	24 V AC SOLENOID WITH WIRES	173	1
	1		